



**Art.-Nr: YWDLA-LANS-4201-U**

**LED luminaire "LARO", wall / ceiling surface mounting,  
rectangular, 1403x93x80mm, 42W, 4550lm, 4000K, CRI >80,  
IP40, UGR <19, switchable**

LED ceiling- and wall-mounted luminaire, LARO series, with direct and direct/indirect beam. Housing made from aluminium, white, powder-coated. Diffuser made from plastic (PMMA), micro-prismatic, UV-stabilised. Operating unit can be switched or dimmed (DALI dimmer), integrated. UGR < 19 and screen-compliant in accordance with EN 12464-1. Version with CASAMBI® Bluetooth control available.



Mer informasjon

TEKNISKE DATA


Dimensjoner	
Produktdimensjoner lengde	1403 mm
Produktdimensjoner bredde	93 mm
Produktmål høyde	80 mm
Produktvekt	6.3 kg
Emballasjedimensjoner	
Emballasjedimensjoner lengde	1600 mm
Emballasjemål bredde	150 mm
Emballasjemål høyde	150 mm
Vekt inkludert emballasje	6.5 kg
Farge	
Farge	Hvit
Koffertmateriale	
Koffertmateriale	aluminium
Sertifisering	
Sertifisering	CE
beskyttelses klasse	1
IP-beskyttelse)	IP40
Glødetrådtest	650°C
Elektrisk forbindelse	






Tilkoblingstverrsnitt	1.5 mm <sup>2</sup>
Systemytelse	42 W
Inngangsspenning AC	220-240V / 50-60Hz V
Startstrøm	33 A
Maktfaktor	0.98 PF
Innkoblingstid	162 µs
<b>Lystekniske data</b>	
lyskilde	LED
Nominell lysstrøm	4550 lm
Fargegjengivelsesindeks	> 80 Ra
Fargetoleranse	2
Strålevinkel	68/66 °
fargetemperatur	4000 K
lys farge	840
UGR	18.8
levetid	50000 h, L80
lyseffekt	108 lm/w
<b>temperaturer</b>	
Omgivelsestemperatur (min)	0 °C
Omgivelsestemperatur (maks.)	+25 °C
<b>Monteringstype</b>	
Monteringstype	Takkonstruksjon, Veggkonstruksjon
<b>Strømforsyning</b>	
Antall strømforsyninger på LS B10A	13 Stk.
Antall strømforsyninger på LS B16A	21 Stk.
Antall strømforsyninger på LS C10A	22 Stk.
Antall strømforsyninger på LS C16A	36 Stk.
Elektrisk versjon	med intern driftsenhet, Byttbar



TEXT.LICHTVERTEILUNG

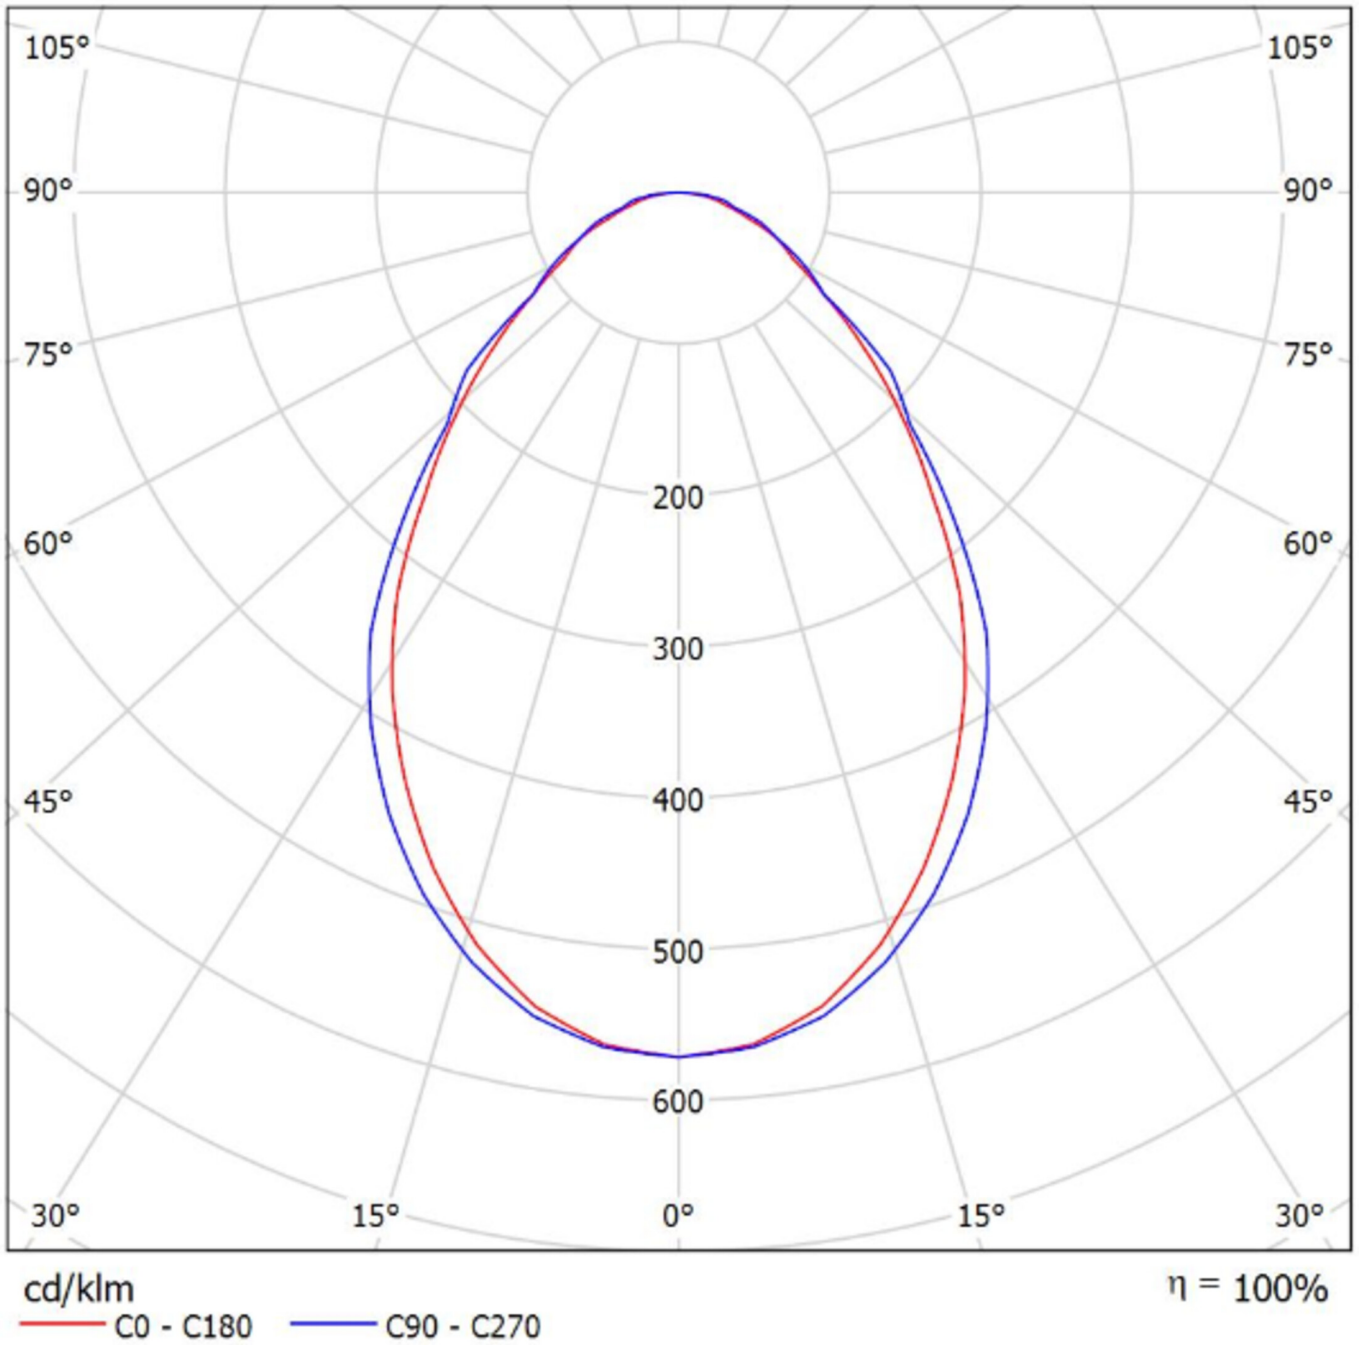

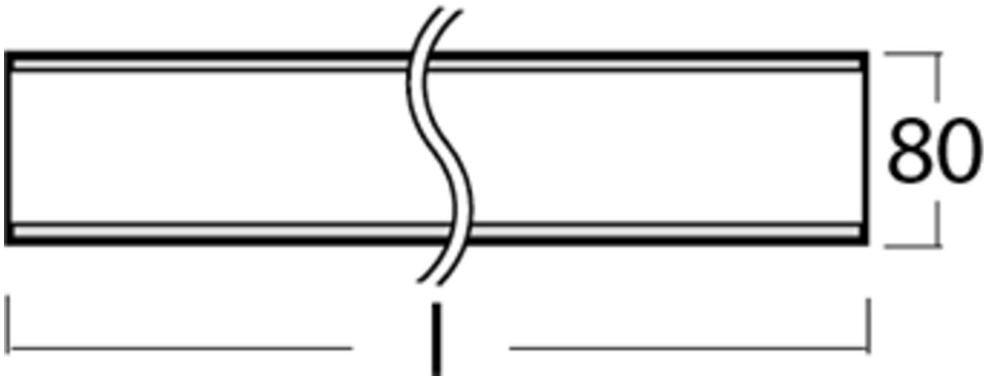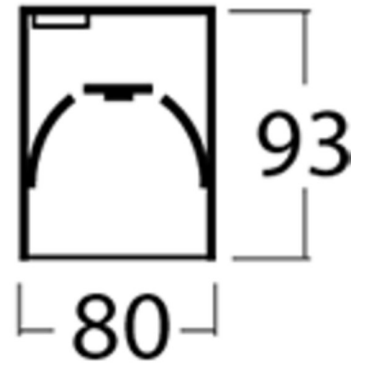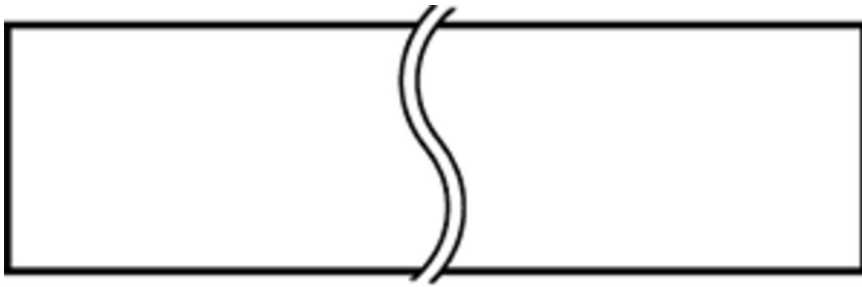

stand: 21.06.2024 - Det tas forbehold om tekniske endringer og feil.