



Art.-Nr: YWDLA-QADT-1801
LED luminaire "LARIO", w-/c- surface mounting,
300x300x58mm, 18W, 2150lm, 3000, 4000, 6000K, Dip-
Switch, CRI >80, IP54, white, Triac

LED ceiling- and wall-mounted luminaire, LARIO series, IP54. Housing and diffuser made from PC (fire- and UV-resistant), opal. Operating unit integrated (can be switched). Three-stage adjustment of colour temperature (3000K, 4000K, 5700K) using DIP switch. Version with CASAMBI Bluetooth control available.



Mer informasjon

TEKNISKE DATA


Dimensjoner	
Produktdimensjoner lengde	300 mm
Produktdimensjoner bredde	300 mm
Produktmål høyde	58 mm
Produktvekt	0.75 kg
Emballasjedimensjoner	
Vekt inkludert emballasje	1.05 kg
Farge	
Farge	Hvit
Koffertmateriale	
Koffertmateriale	Polykarbonat
Sertifisering	
Sertifisering	CE, RoHS
beskyttelses klasse	2
IP-beskyttelse)	IP54
Elektrisk forbindelse	
Dimming type	TRIAC
Systemytelse	18 W
Inngangsspenning AC	220-240V / 50-60Hz V
Maktfaktor	0.9 PF
Strømforsyning	





Elektrisk versjon	med intern driftsenhet, Dimbar
Lystekniske data	
lyskilde	LED
Nominell lysstrøm	2150 lm
Fargegjengivelsesindeks	> 80 Ra
Fargetoleranse	3
Strålevinkel	113 °
fargetemperatur	3000/4000/6000 K
lys farge	830/840/860
UGR	23.9
levetid	50000 h, L80
lyseffekt	119 lm/w
temperaturer	
Omgivelsestemperatur (min)	-20 °C
Omgivelsestemperatur (maks.)	+45 °C
Monteringstype	
Monteringstype	Takkonstruksjon, Veggkonstruksjon



TEXT.LICHTVERTEILUNG

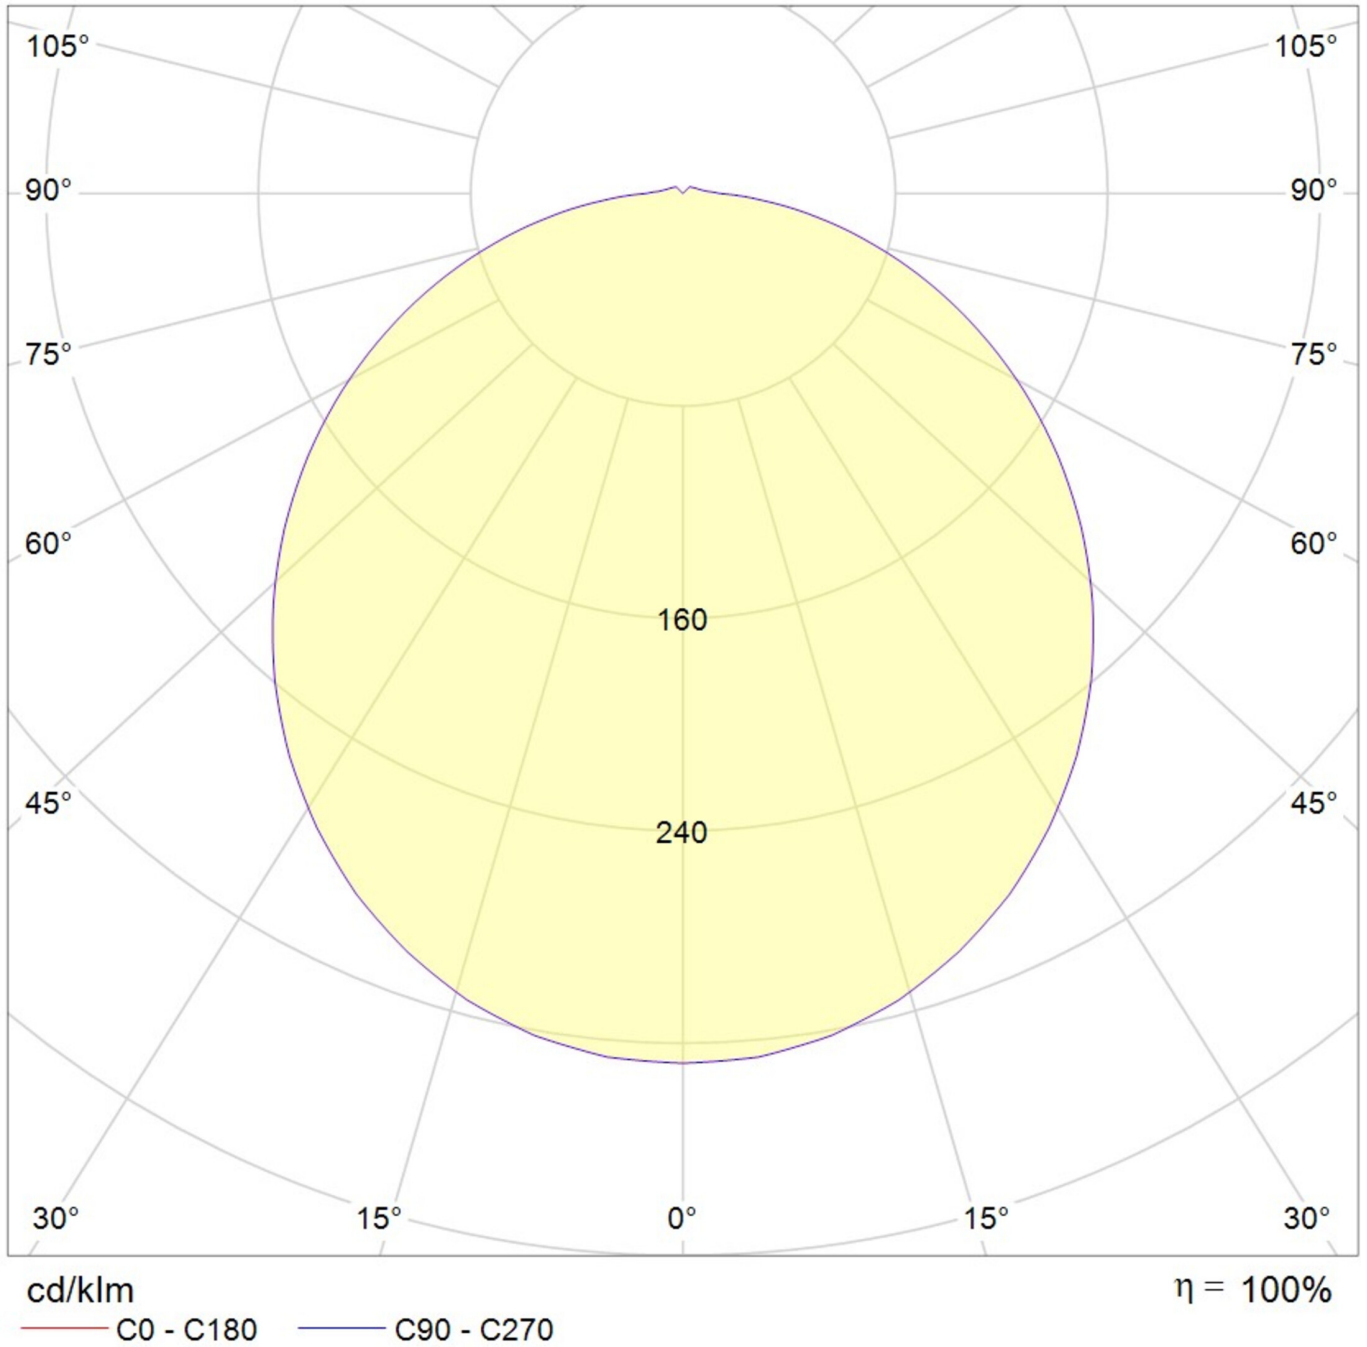

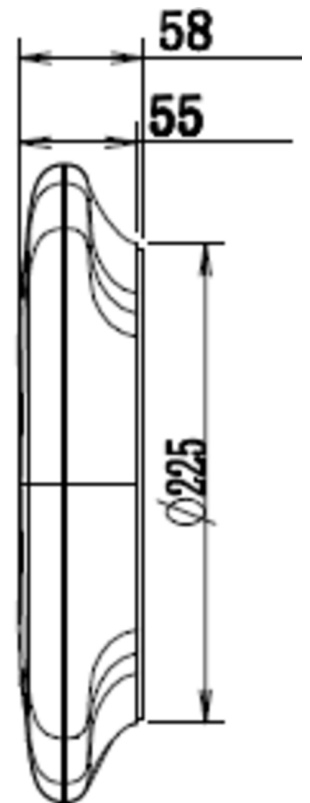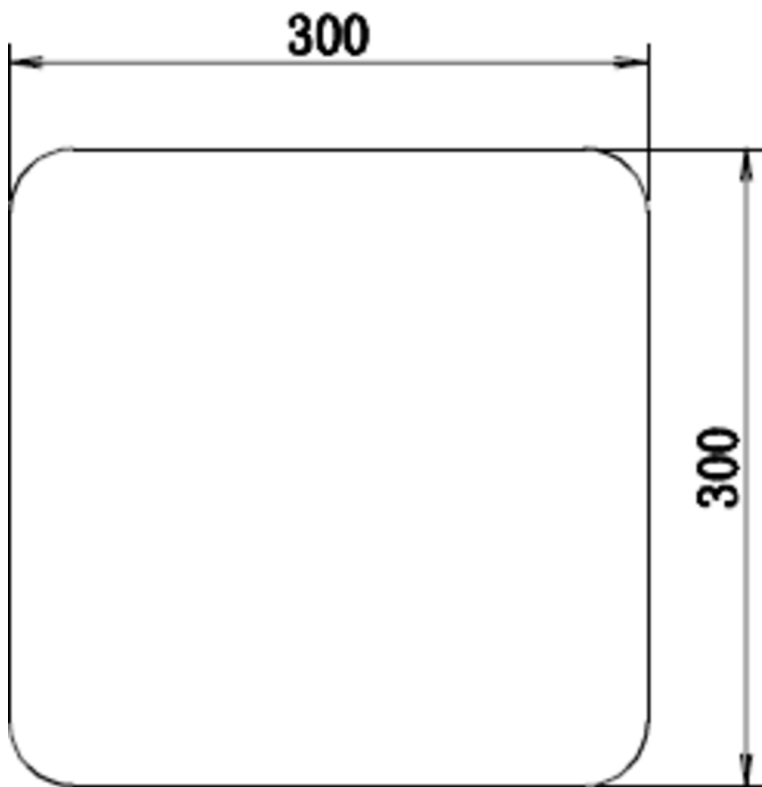

stand: 21.06.2024 - Det tas forbehold om tekniske endringer og feil.