




Art.-Nr: YWDMA-LANS-4401-D
LED luminaire "MAVS", ceiling surface mounting, rectangular, 1415x59x79mm, 44W, 4600lm, 4000K, CRI >80, IP40, white, switchable

LED ceiling- and wall-mounted luminaire, MAVS. Housing made from aluminium, white, powder-coated. Diffuser made from plastic (PMMA), opal, UV-stabilised. Operating unit can be switched or dimmed (DALI dimmer), integrated. Version with CASAMBI® Bluetooth control available. DC compatible.

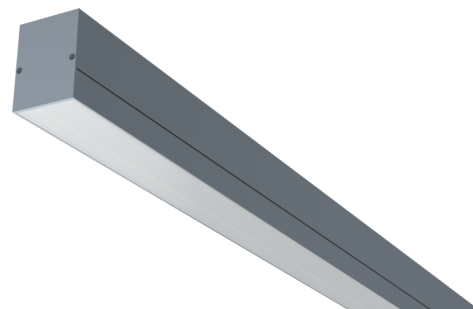

Mer informasjon



TEKNISKE DATA


Dimensjoner	
Produktdimensjoner lengde	1415 mm
Produktdimensjoner bredde	59 mm
Produktmål høyde	79 mm
Produktvekt	3.2 kg
Emballasjedimensjoner	
Emballasjedimensjoner lengde	1600 mm
Emballasjemål bredde	119 mm
Emballasjemål høyde	74 mm
Vekt inkludert emballasje	3.5 kg
Farge	
Farge	Sølv
Koffertmateriale	
Koffertmateriale	aluminium
Sertifisering	
Sertifisering	CE
beskyttelses klasse	1
IP-beskyttelse)	IP40
Elektrisk forbindelse	
Tilkoblingstverrsnitt	2.5 mm ²




Systemytelse	44 W
Inngangsspenning AC	220-240V / 50-60Hz V
Startstrøm	35 A
Maktfaktor	0.9 PF
Innkoblingstid	240 µs
Strømforsyning	
Antall strømforsyninger på LS C16A	26 Stk.
DC-egnethet	Ja
Elektrisk versjon	med intern driftsenhet, Byttbar
Lystekniske data	
lyskilde	LED
Nominell lysstrøm	4600 lm
Fargegjengivelsesindeks	> 80 Ra
Fargetoleranse	3
Strålevinkel	60 °
fargetemperatur	4000 K
lys farge	840
UGR	26.2
levetid	75000 h, L80
lyseffekt	105 lm/w
temperaturer	
Omgivelsestemperatur (min)	-20 °C
Omgivelsestemperatur (maks.)	+30 °C
Monteringstype	
Monteringstype	Takkonstruksjon



TEXT.LICHTVERTEILUNG

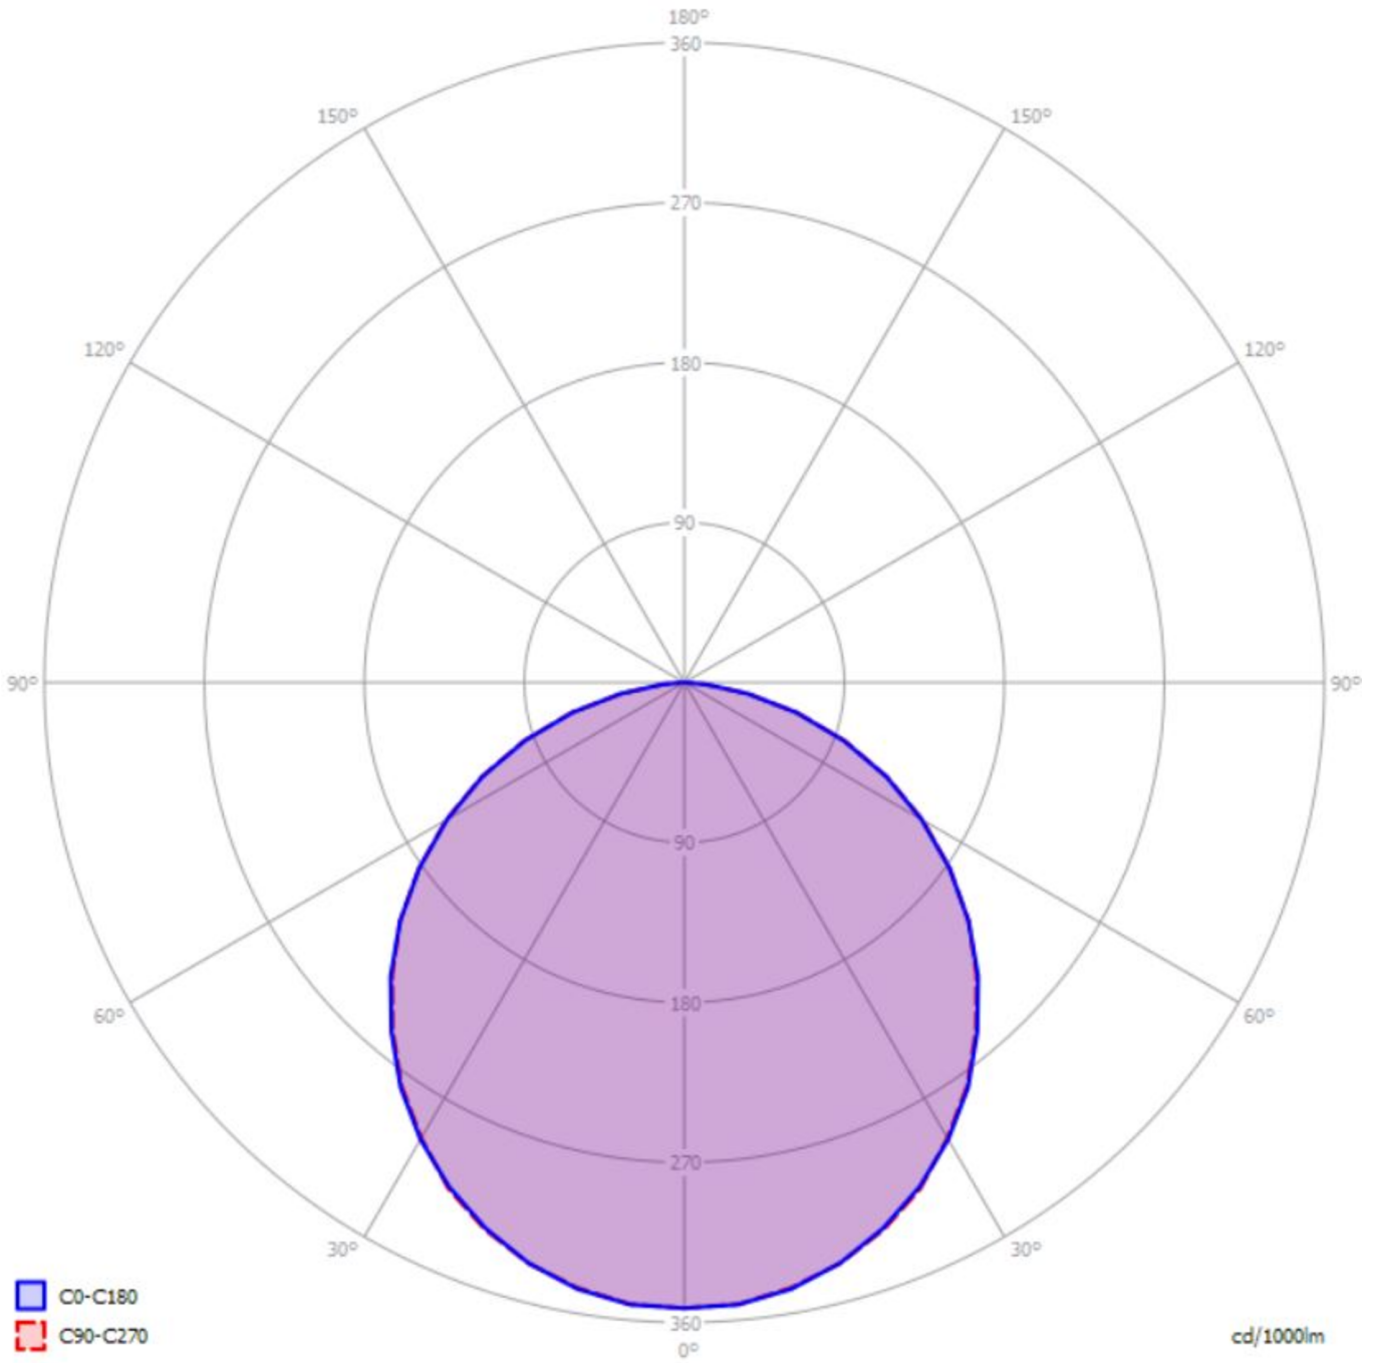

cd/1000lm

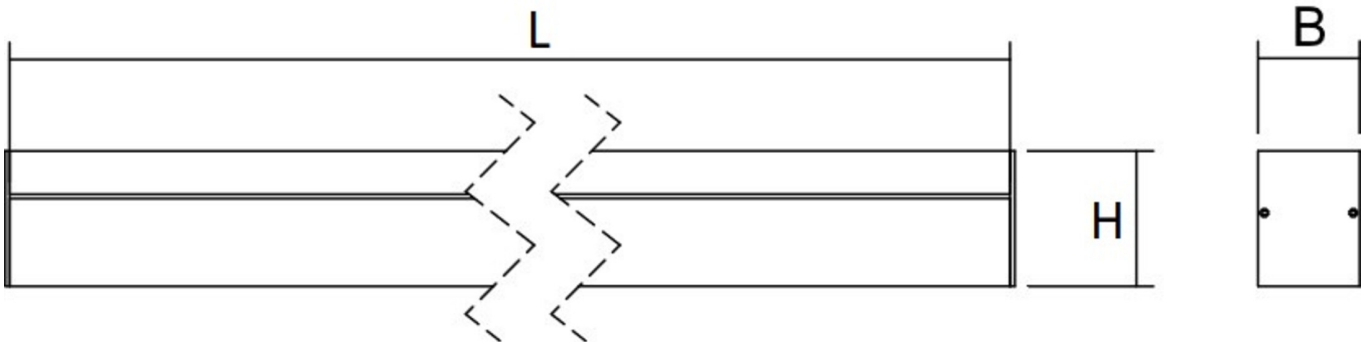



TILBEHØRSLISTE

YWDMA-PENDEL - Pendant set for MAVS incl. transparent cable 3 x 1.5 mm²

YWDMA-MONKL-A - Mounting clamp for MAVS, surface mounting / 1 pc.

stand: 21.06.2024 - Det tas forbehold om tekniske endringer og feil.