




**Art.-Nr: YWDMA-LANS-6101-D**  
**LED luminaire "MAVS", ceiling surface mounting, rectangular, 1975x59x79mm, 61W, 6450lm, 4000K, CRI >80, IP40, white, switchable**

LED ceiling- and wall-mounted luminaire, MAVS. Housing made from aluminium, white, powder-coated. Diffuser made from plastic (PMMA), opal, UV-stabilised. Operating unit can be switched or dimmed (DALI dimmer), integrated. Version with CASAMBI® Bluetooth control available. DC compatible.

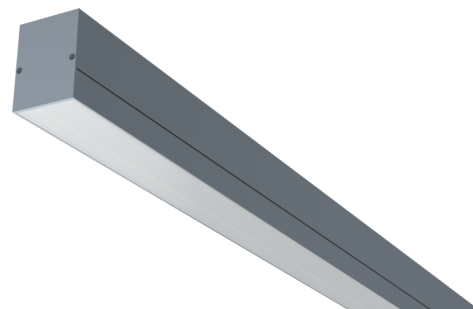

Mer informasjon



## TEKNISKE DATA


Dimensjoner	
Produktdimensjoner lengde	1975 mm
Produktdimensjoner bredde	59 mm
Produktmål høyde	79 mm
Produktvekt	4.8 kg
Emballasjedimensjoner	
Emballasjedimensjoner lengde	2010 mm
Emballasjemål bredde	123 mm
Emballasjemål høyde	101 mm
Vekt inkludert emballasje	5.7 kg
Farge	
Farge	Sølv
Koffertmateriale	
Koffertmateriale	aluminium
Sertifisering	
Sertifisering	CE
beskyttelses klasse	1
IP-beskyttelse)	IP40
Elektrisk forbindelse	
Tilkoblingstverrsnitt	2.5 mm <sup>2</sup>




Systemytelse	61 W
Inngangsspenning AC	220-240V / 50-60Hz V
Startstrøm	29 A
Maktfaktor	0.9 PF
Innkoblingstid	143 µs
<b>Strømforsyning</b>	
Antall strømforsyninger på LS C16A	42 Stk.
DC-egnethet	Ja
Elektrisk versjon	med intern driftsenhet, Byttbar
<b>Lystekniske data</b>	
lyskilde	LED
Nominell lysstrøm	6450 lm
Fargegjengivelsesindeks	> 80 Ra
Fargetoleranse	3
Strålevinkel	60 °
fargetemperatur	4000 K
lys farge	840
UGR	26.2
levetid	75000 h, L80
lyseffekt	106 lm/w
<b>temperaturer</b>	
Omgivelsestemperatur (min)	-20 °C
Omgivelsestemperatur (maks.)	+30 °C
<b>Monteringstype</b>	
Monteringstype	Takkonstruksjon



TEXT.LICHTVERTEILUNG

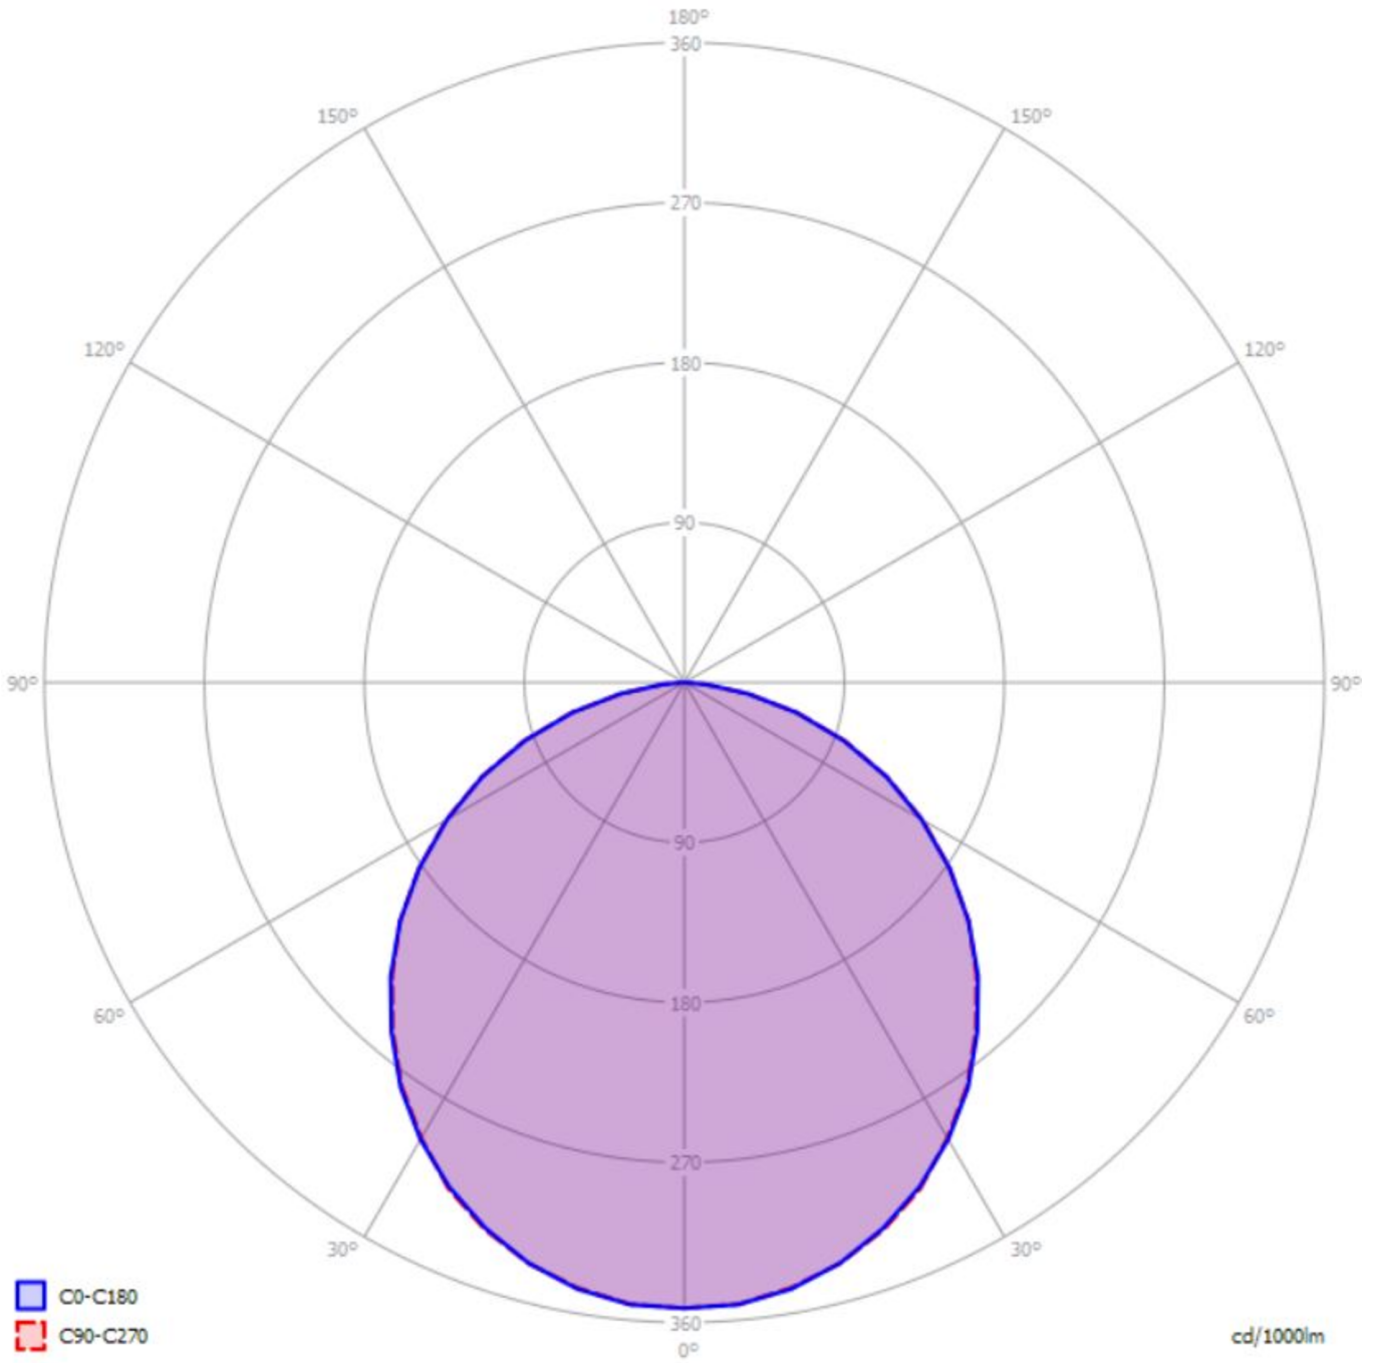

cd/1000lm

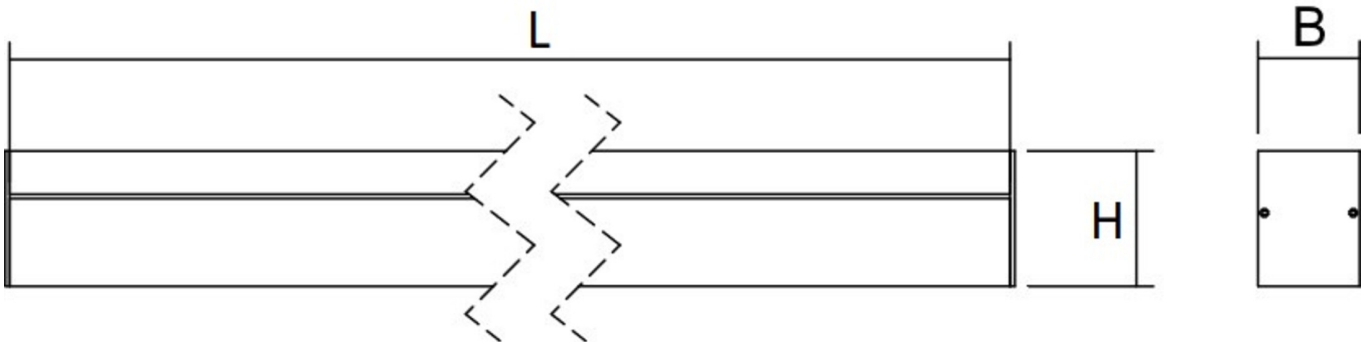



## TILBEHØRSLISTE

YWDMA-PENDEL - Pendant set for MAVS incl. transparent cable 3 x 1.5 mm<sup>2</sup>

YWDMA-MONKL-A - Mounting clamp for MAVS, surface mounting / 1 pc.

stand: 21.06.2024 - Det tas forbehold om tekniske endringer og feil.