




**Art.-Nr: YWDMA-LAWS-2601-D**  
**LED luminaire "MAVS", ceiling surface mounting, rectangular, 850x56x79mm, 26W, 2600lm, 3000K, CRI >80, IP40, white, switchable**

LED ceiling- and wall-mounted luminaire, MAVS. Housing made from aluminium, white, powder-coated. Diffuser made from plastic (PMMA), opal, UV-stabilised. Operating unit can be switched or dimmed (DALI dimmer), integrated. Version with CASAMBI® Bluetooth control available. DC compatible.

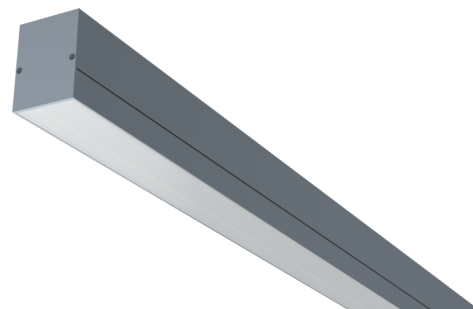

Mer informasjon



## TEKNISKE DATA



Dimensjoner	
Produktdimensjoner lengde	850 mm
Produktdimensjoner bredde	59 mm
Produktmål høyde	79 mm
Produktvekt	2 kg
Emballasjedimensjoner	
Emballasjedimensjoner lengde	1300 mm
Emballasjemål bredde	118 mm
Emballasjemål høyde	75 mm
Vekt inkludert emballasje	2.3 kg
Farge	
Farge	Sølv
Koffertmateriale	
Koffertmateriale	aluminium
Sertifisering	
Sertifisering	CE
beskyttelses klasse	1
IP-beskyttelse)	IP40
Elektrisk forbindelse	
Tilkoblingstverrsnitt	2.5 mm <sup>2</sup>



Systemytelse	26 W
Inngangsspenning AC	220-240V / 50-60Hz V
Startstrøm	29 A
Maktfaktor	0.9 PF
Innkoblingstid	143 µs
<b>Strømforsyning</b>	
Antall strømforsyninger på LS C16A	42 Stk.
DC-egnethet	Ja
Elektrisk versjon	med intern driftsenhet, Byttbar
<b>Lystekniske data</b>	
lyskilde	LED
Nominell lysstrøm	2600 lm
Fargegjengivelsesindeks	> 80 Ra
Fargetoleranse	3
Strålevinkel	60 °
fargetemperatur	3000 K
lys farge	830
UGR	26.2
levetid	75000 h, L80
lyseffekt	100 lm/w
<b>temperaturer</b>	
Omgivelsestemperatur (min)	-20 °C
Omgivelsestemperatur (maks.)	+30 °C
<b>Monteringstype</b>	
Monteringstype	Takkonstruksjon



TEXT.LICHTVERTEILUNG

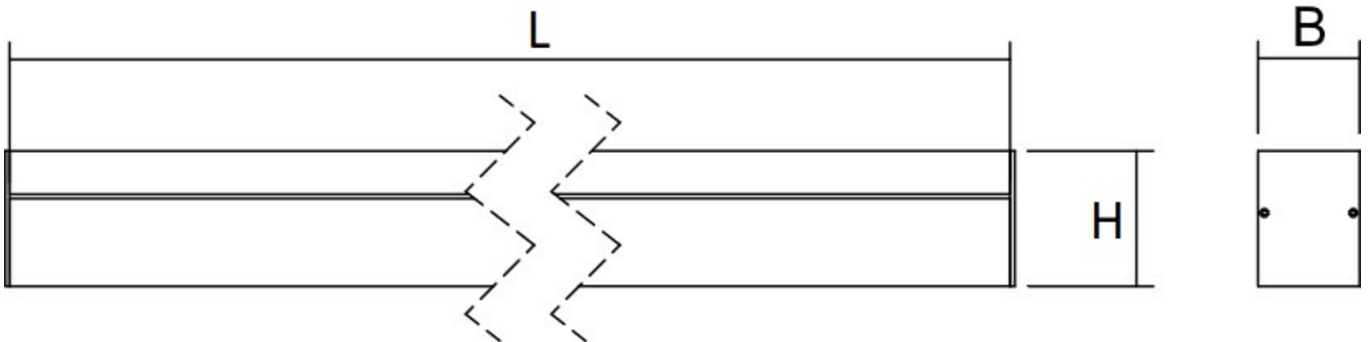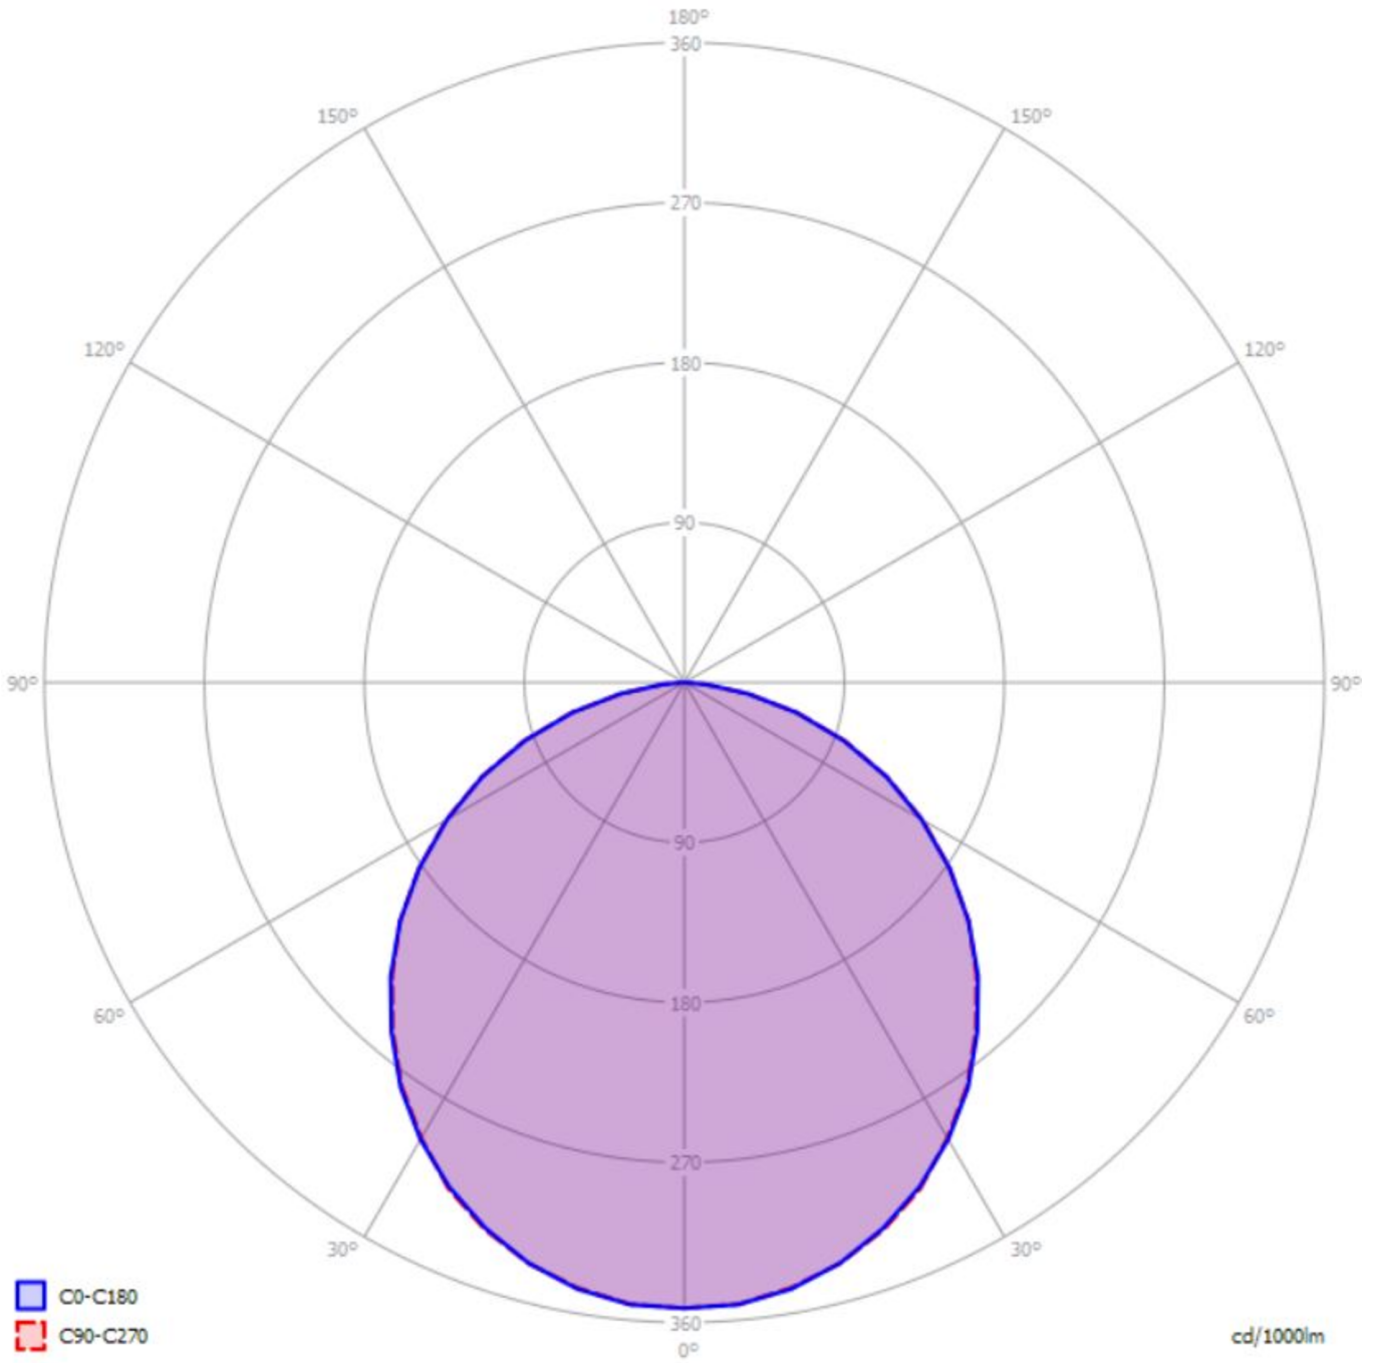



## TILBEHØRSLISTE

YWDMA-PENDEL - Pendant set for MAVS incl. transparent cable 3 x 1.5 mm<sup>2</sup>

YWDMA-MONKL-A - Mounting clamp for MAVS, surface mounting / 1 pc.

stand: 21.06.2024 - Det tas forbehold om tekniske endringer og feil.