




Art.-Nr: YWDMA-LAWS-6101-D
LED luminaire "MAVS", ceiling surface mounting, rectangular, 1975x59x79mm, 61W, 6100lm, 4000K, CRI >80, IP40, white, switchable

LED ceiling- and wall-mounted luminaire, MAVS. Housing made from aluminium, white, powder-coated. Diffuser made from plastic (PMMA), opal, UV-stabilised. Operating unit can be switched or dimmed (DALI dimmer), integrated. Version with CASAMBI® Bluetooth control available. DC compatible.

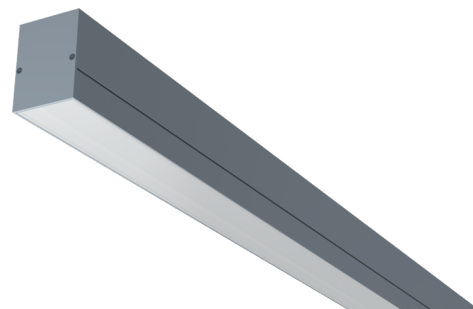

Mer informasjon



TEKNISKE DATA


Dimensjoner	
Produktdimensjoner lengde	1975 mm
Produktdimensjoner bredde	59 mm
Produktmål høyde	79 mm
Produktvekt	4.8 kg
Emballasjedimensjoner	
Emballasjedimensjoner lengde	2010 mm
Emballasjemål bredde	123 mm
Emballasjemål høyde	101 mm
Vekt inkludert emballasje	5.7 kg
Farge	
Farge	Sølv
Koffertmateriale	
Koffertmateriale	aluminium
Sertifisering	
Sertifisering	CE
beskyttelses klasse	1
IP-beskyttelse)	IP40
Elektrisk forbindelse	
Tilkoblingstverrsnitt	2.5 mm ²




Systemytelse	61 W
Inngangsspenning AC	220-240V / 50-60Hz V
Startstrøm	29 A
Maktfaktor	0.9 PF
Innkoblingstid	143 μ s
Strømforsyning	
Antall strømforsyninger på LS C16A	42 Stk.
DC-egnethet	Ja
Elektrisk versjon	med intern driftsenhet, Byttbar
Lystekniske data	
lyskilde	LED
Nominell lysstrøm	6100 lm
Fargegjengivelsesindeks	> 80 Ra
Fargetoleranse	3
Strålevinkel	60 °
fargetemperatur	3000 K
lys farge	830
UGR	26.2
levetid	75000 h, L80
lyseffekt	100 lm/w
temperaturer	
Omgivelsestemperatur (min)	-20 °C
Omgivelsestemperatur (maks.)	+30 °C
Monteringstype	
Monteringstype	Takkonstruksjon



TEXT.LICHTVERTEILUNG

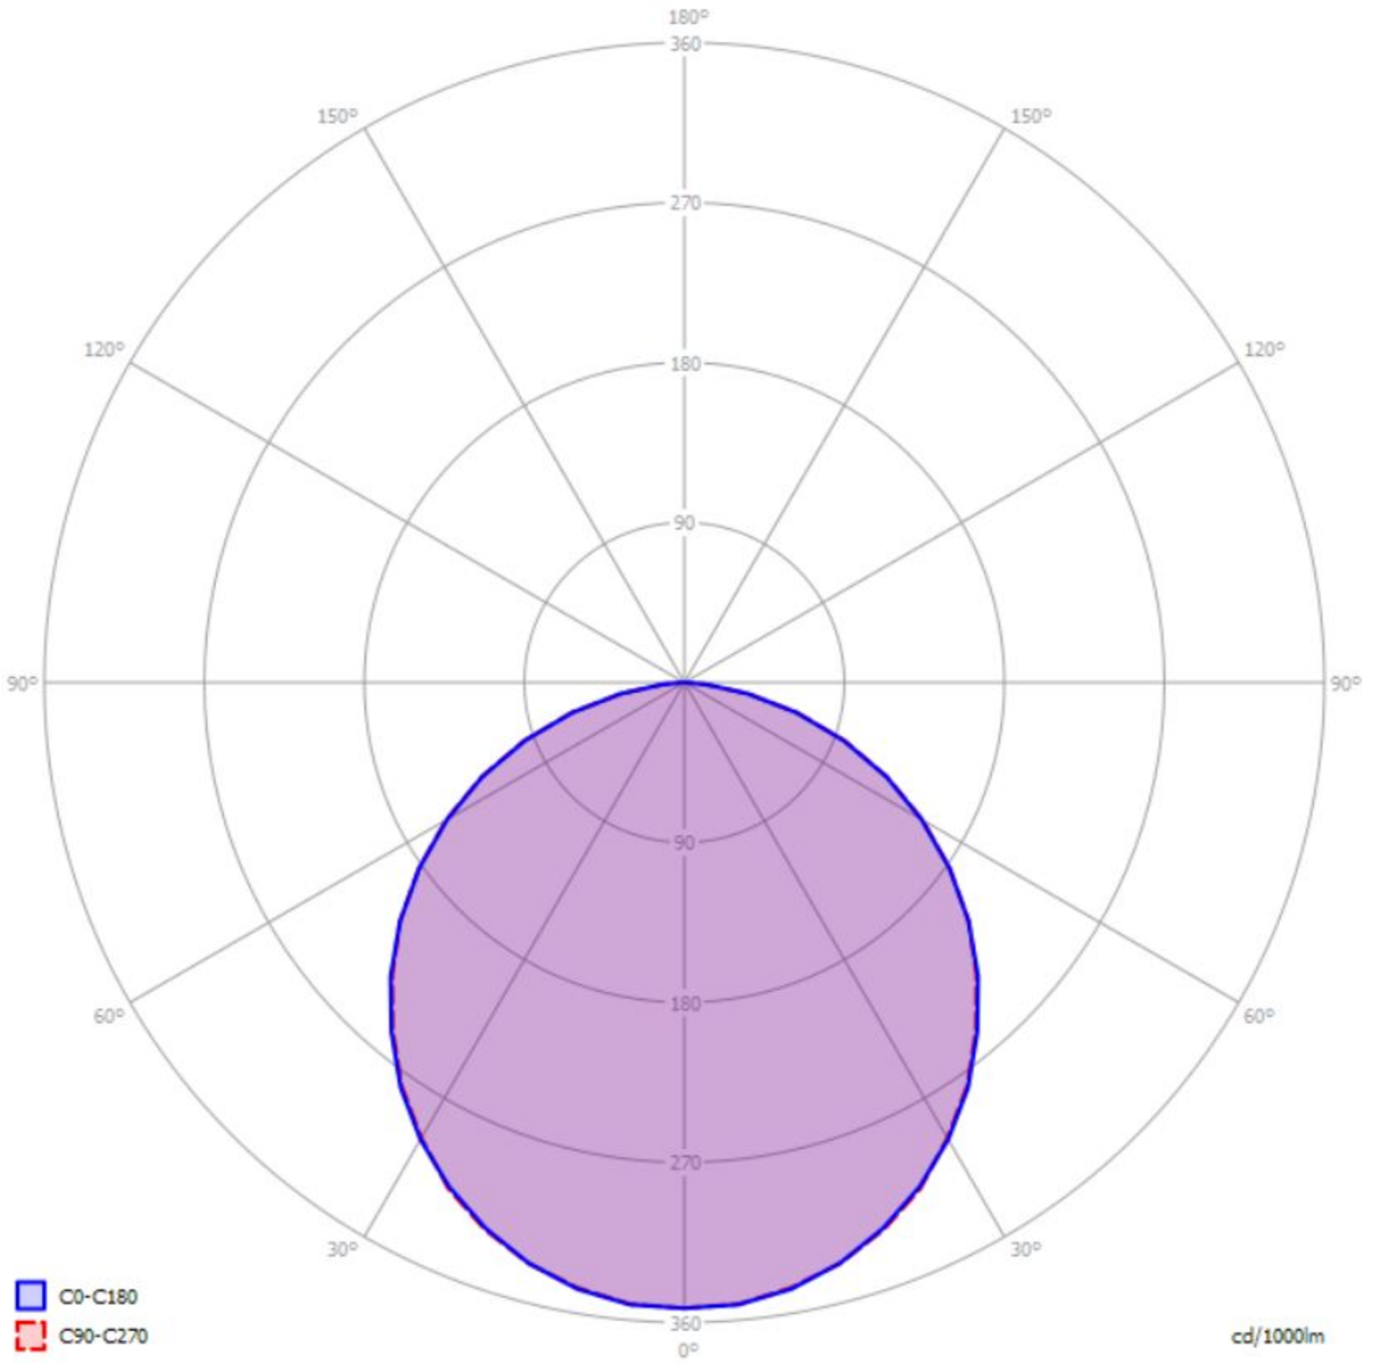

cd/1000lm

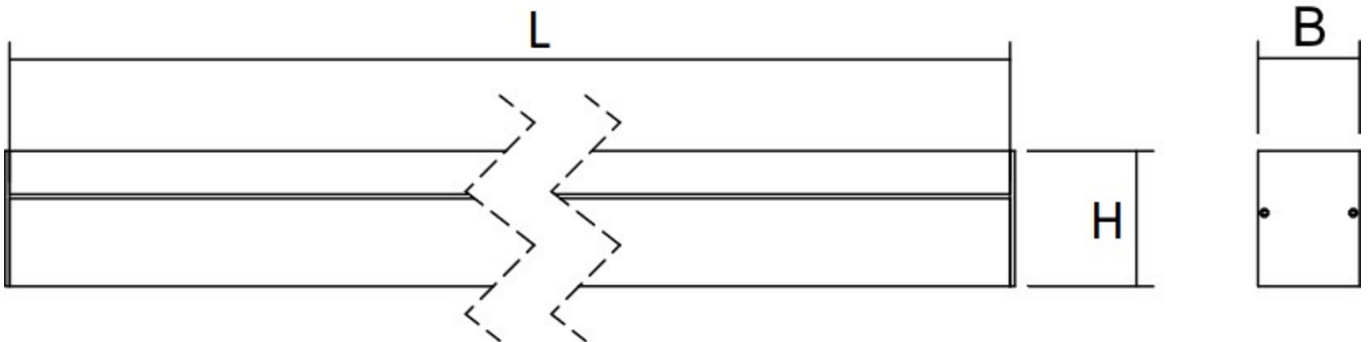



TILBEHØRSLISTE

YWDMA-PENDEL - Pendant set for MAVS incl. transparent cable 3 x 1.5 mm²

YWDMA-MONKL-A - Mounting clamp for MAVS, surface mounting / 1 pc.

stand: 21.06.2024 - Det tas forbehold om tekniske endringer og feil.