




**Art.-Nr: YWDMA-LENS-4401-D**  
**LED luminaire "MAVS", ceiling recessed mounting,**  
**rectangular, 1425x79x79mm, 44W, 4600lm, 4000K, CRI >80,**  
**IP40, white, switchable**

LED ceiling- and wall-mounted luminaire, MAVS. Housing made from aluminium, white, powder-coated. Diffuser made from plastic (PMMA), opal, UV-stabilised. Operating unit can be switched or dimmed (DALI dimmer), integrated. Version with CASAMBI® Bluetooth control available. DC compatible.

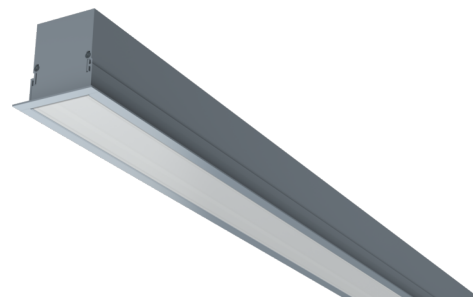

Mer informasjon



## TEKNISKE DATA



Dimensjoner	
Produktdimensjoner lengde	1425 mm
Produktdimensjoner bredde	79 mm
Produktmål høyde	79 mm
Produktvekt	3.5 kg
Emballasjedimensjoner	
Emballasjedimensjoner lengde	1600 mm
Emballasjemål bredde	119 mm
Emballasjemål høyde	74 mm
Vekt inkludert emballasje	4 kg
CS_GROUP.CutoutDimensions	
Installasjonsdybde	150 mm
Farge	
Farge	Sølv
Koffertmateriale	
Koffertmateriale	aluminium
Sertifisering	
Sertifisering	CE
beskyttelses klasse	1
IP-beskyttelse)	IP40



Elektrisk forbindelse	
Tilkoblingstverrsnitt	2.5 mm <sup>2</sup>
Systemytelse	44 W
Inngangsspenning AC	220-240V / 50-60Hz V
Startstrøm	35 A
Maktfaktor	0.9 PF
Innkoblingstid	240 µs
Strømforsyning	
Antall strømforsyninger på LS C16A	26 Stk.
DC-egnethet	Ja
Elektrisk versjon	med intern driftsenhet, Byttbar
Lystekniske data	
lyskilde	LED
Nominell lysstrøm	4600 lm
Fargegjengivelsesindeks	> 80 Ra
Fargetoleranse	3
Strålevinkel	60 °
fargetemperatur	4000 K
lys farge	840
UGR	26.2
levetid	75000 h, L80
lyseffekt	105 lm/w
temperaturer	
Omgivelsestemperatur (min)	-20 °C
Omgivelsestemperatur (maks.)	+30 °C
Monteringstype	
Monteringstype	Takmontering



TEXT.LICHTVERTEILUNG

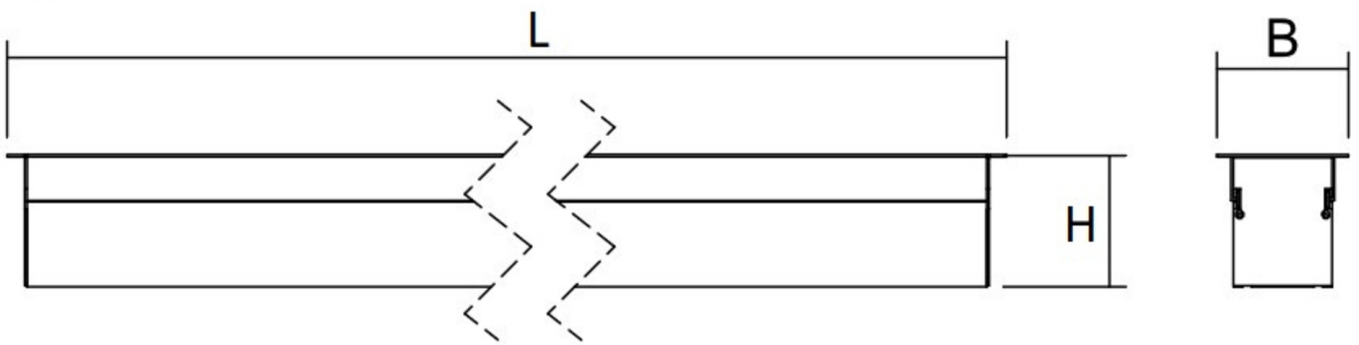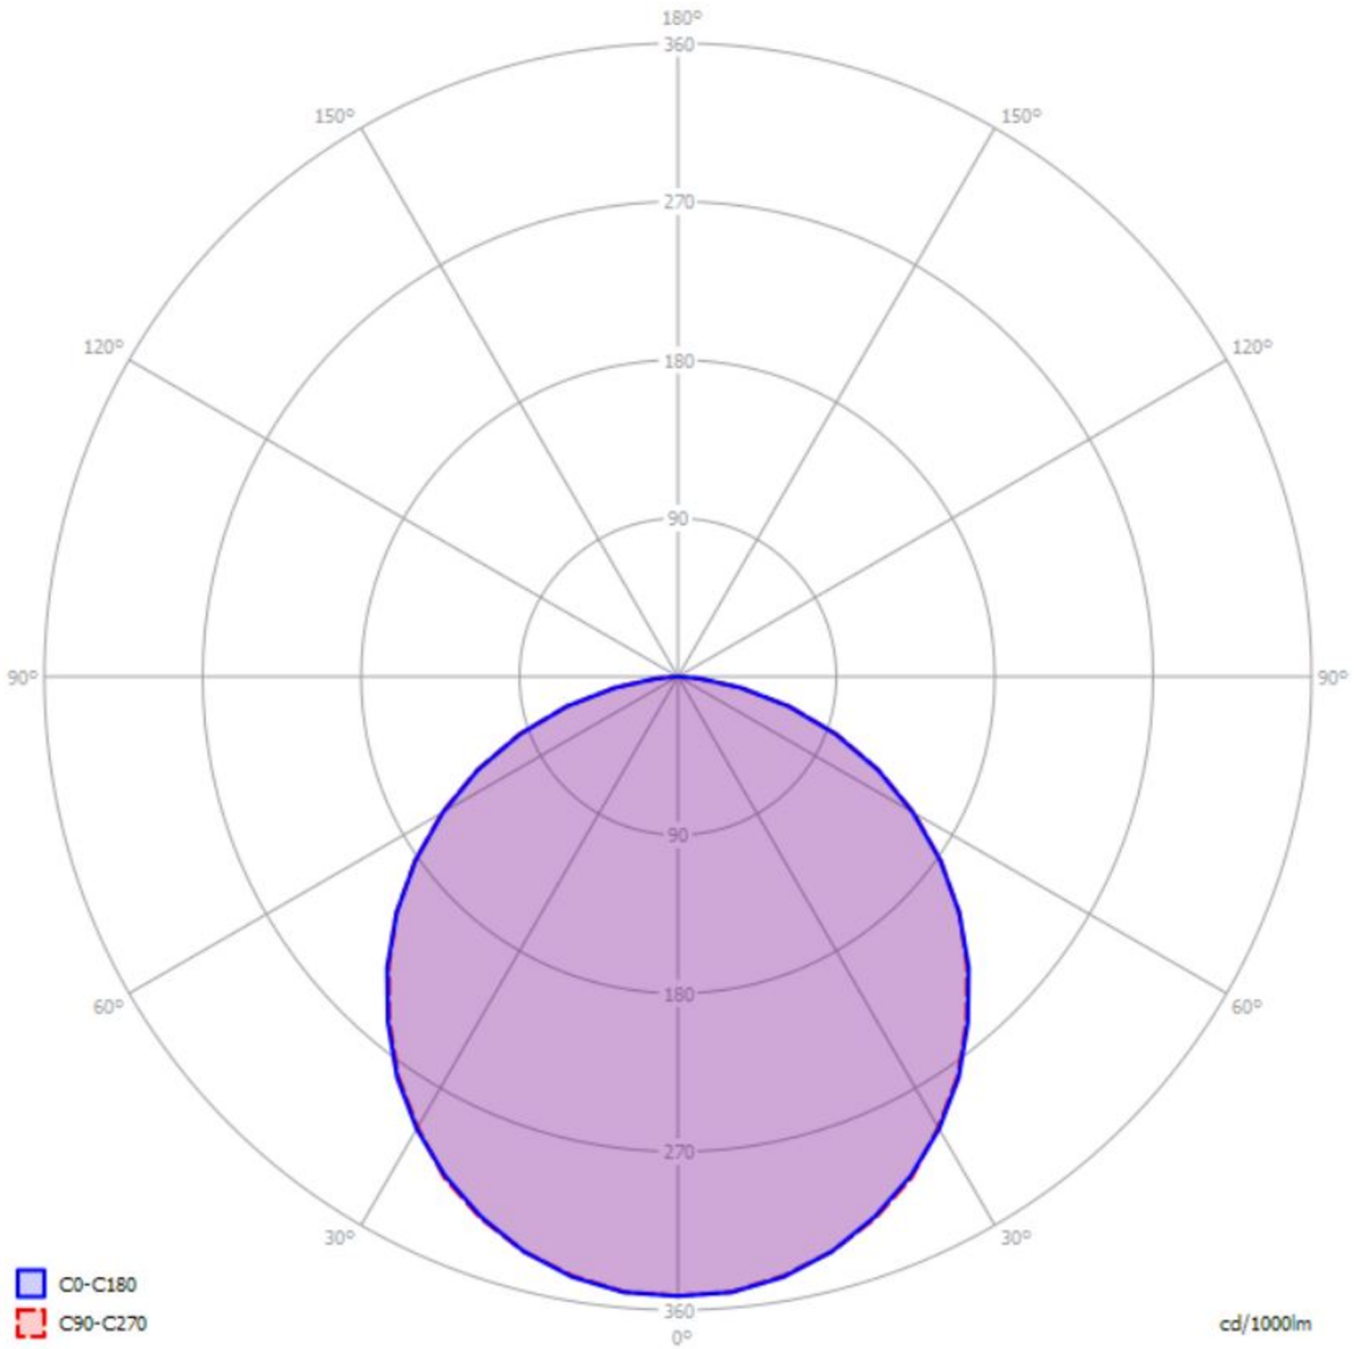



## TILBEHØRSLISTE

YWDMA-MONKL-E - Mounting clamp for MAVS, recessed mounting / 1 pc.

stand: 21.06.2024 - Det tas forbehold om tekniske endringer og feil.