




Art.-Nr: YWDMA-LENS-6101-D
LED luminaire "MAVS", ceiling recessed mounting,
rectangular, 1985x79x79mm, 61W, 6450lm, 4000K, CRI >80,
IP40, white, switchable

LED ceiling- and wall-mounted luminaire, MAVS. Housing made from aluminium, white, powder-coated. Diffuser made from plastic (PMMA), opal, UV-stabilised. Operating unit can be switched or dimmed (DALI dimmer), integrated. Version with CASAMBI® Bluetooth control available. DC compatible.

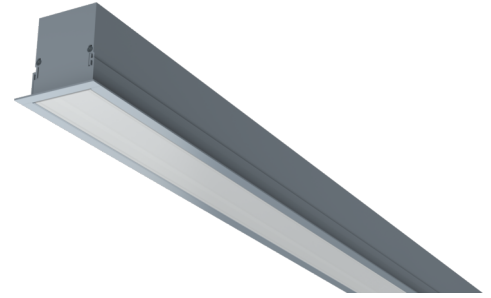

Mer informasjon



TEKNISKE DATA



Dimensjoner	
Produktdimensjoner lengde	1985 mm
Produktdimensjoner bredde	79 mm
Produktmål høyde	79 mm
Produktvekt	5 kg
Emballasjedimensjoner	
Emballasjedimensjoner lengde	2010 mm
Emballasjemål bredde	123 mm
Emballasjemål høyde	101 mm
Vekt inkludert emballasje	5.9 kg
CS_GROUP.CutoutDimensions	
Installasjonsdybde	150 mm
Farge	
Farge	Sølv
Koffertmateriale	
Koffertmateriale	aluminium
Sertifisering	
Sertifisering	CE
beskyttelses klasse	1
IP-beskyttelse)	IP40



Elektrisk forbindelse	
Tilkoblingstverrsnitt	2.5 mm ²
Systemytelse	61 W
Inngangsspenning AC	220-240V / 50-60Hz V
Startstrøm	29 A
Maktfaktor	0.9 PF
Innkoblingstid	143 µs
Strømforsyning	
Antall strømforsyninger på LS C16A	42 Stk.
DC-egnethet	Ja
Elektrisk versjon	med intern driftsenhet, Byttbar
Lystekniske data	
lyskilde	LED
Nominell lysstrøm	6450 lm
Fargegjengivelsesindeks	> 80 Ra
Fargetoleranse	3
Strålevinkel	60 °
fargetemperatur	4000 K
lys farge	840
UGR	26.2
levetid	75000 h, L80
lyseffekt	106 lm/w
temperaturer	
Omgivelsestemperatur (min)	-20 °C
Omgivelsestemperatur (maks.)	+30 °C
Monteringstype	
Monteringstype	Takmontering



TEXT.LICHTVERTEILUNG

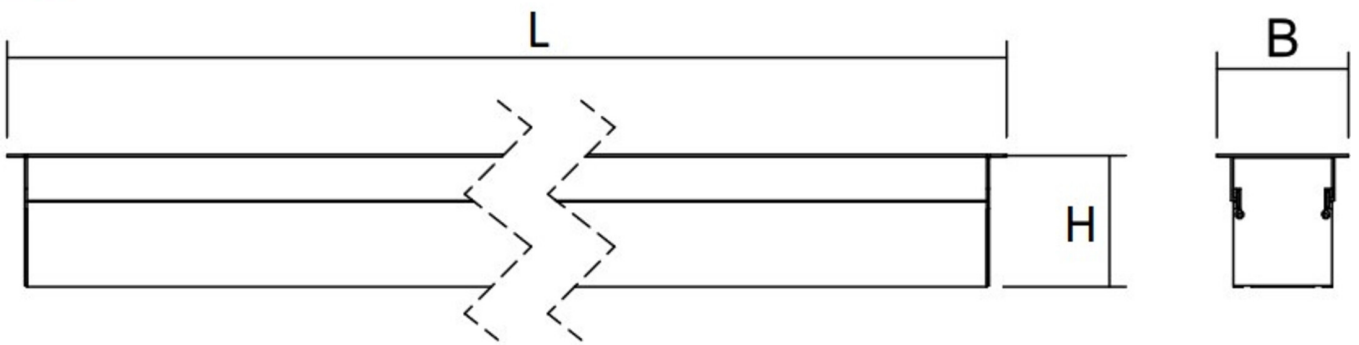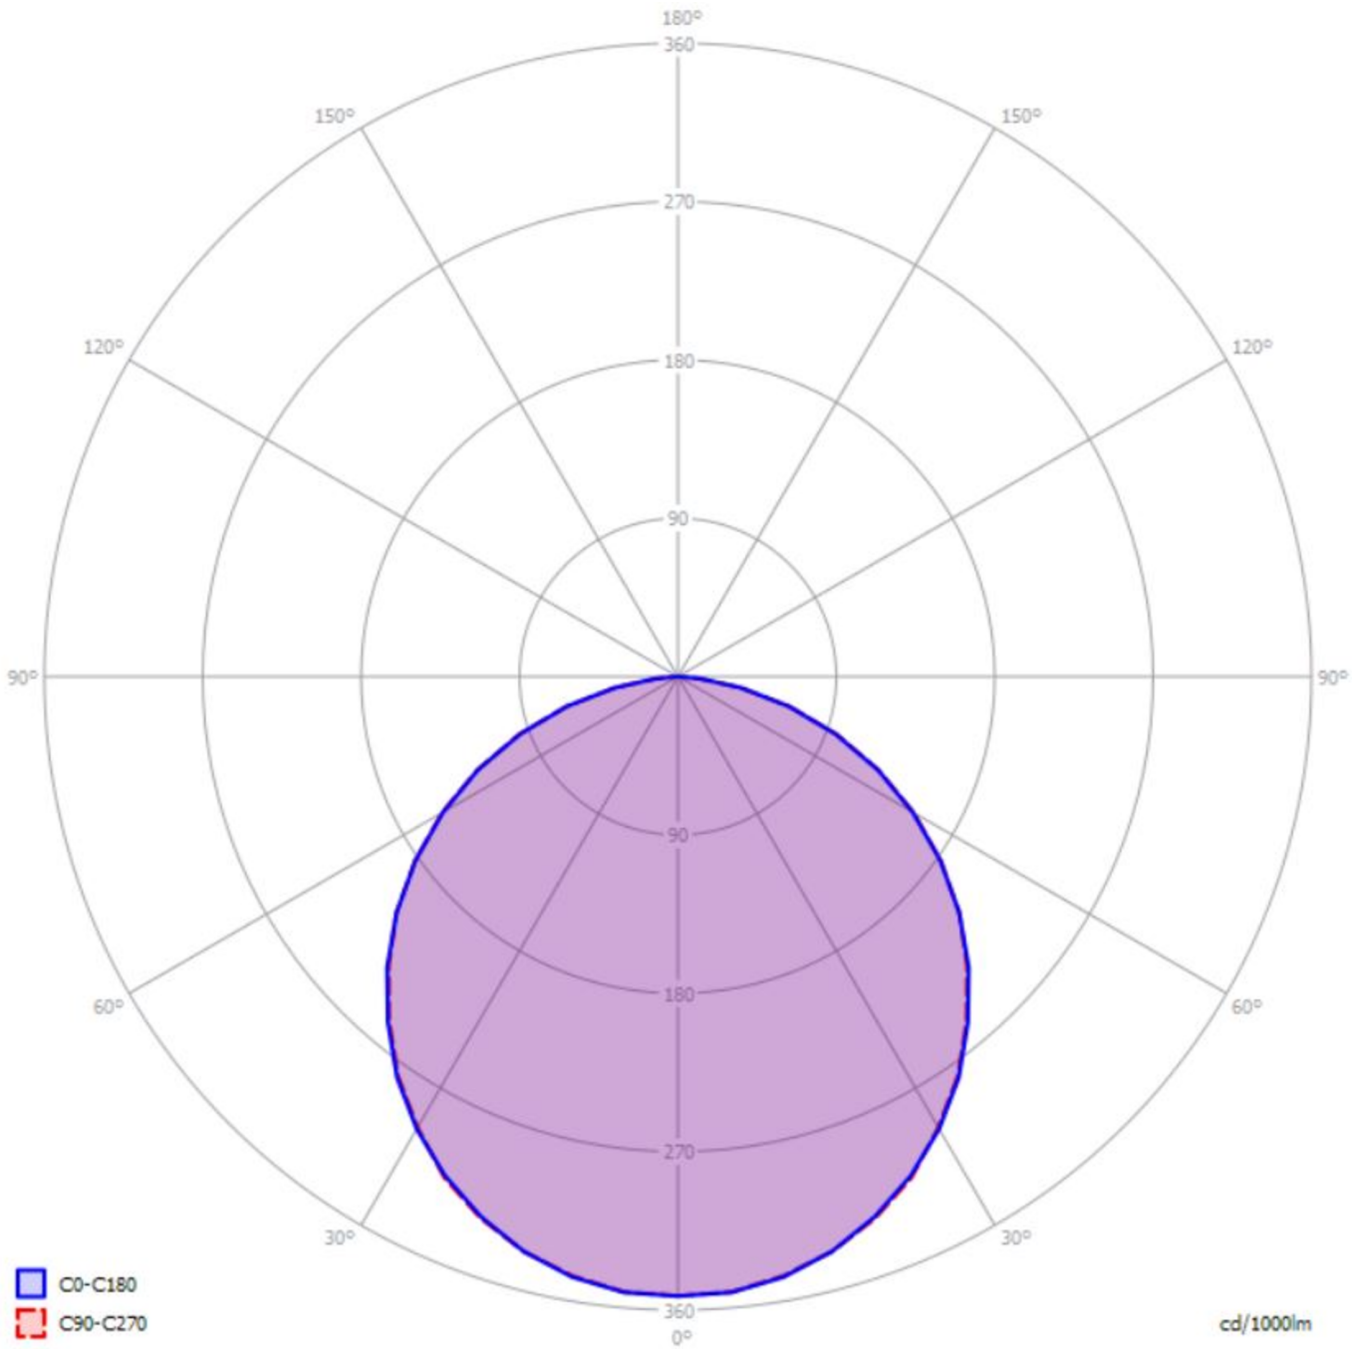

cd/1000lm



TILBEHØRSLISTE

YWDMA-MONKL-E - Mounting clamp for MAVS, recessed mounting / 1 pc.

stand: 21.06.2024 - Det tas forbehold om tekniske endringer og feil.