



Art.-Nr: YWDPO-REWD-3301-D
LED luminaire "PORIO", wall / ceiling recessed mounting,
round, 464x125mm, 33W, 2850lm, 3000K, CRI >80, IP20,
white, Dali dimmable

LED ceiling- and wall-mounted luminaire, PORIO series, recessed design, as the basic lighting for commercial and residential rooms. Housing made from steel plate, white, powder-coated. Diffuser made from plastic (PMMA), opal, UV-stabilised. Operating unit can be switched or dimmed (DALI dimmer), integrated. Version with CASAMBI Bluetooth control available. DC compatible.



Mer informasjon



TEKNISKE DATA


Dimensjoner	
diameter	464 mm
Produktmål høyde	90 mm
Produktvekt	4 kg
Emballasjedimensjoner	
Emballasjedimensjoner lengde	480 mm
Emballasjemål bredde	480 mm
Emballasjemål høyde	140 mm
Vekt inkludert emballasje	4.2 kg
Farge	
Farge	Hvit
Koffertmateriale	
Koffertmateriale	aluminium
Sertifisering	
Sertifisering	CE
beskyttelses klasse	1
IP-beskyttelse)	IP20
Glødetrådtest	650°C
Elektrisk forbindelse	
Tilkoblingstverrsnitt	1.5 mm ²



Dimming type	DALI
Systemytelse	33 W
Inngangsspenning AC	220-240V / 50-60Hz V
Startstrøm	13.6 A
Maktfaktor	0.97 PF
Innkoblingstid	304 µs
Strømforsyning	
Antall strømforsyninger på LS B10A	18 Stk.
Antall strømforsyninger på LS B16A	28 Stk.
Antall strømforsyninger på LS C10A	30 Stk.
Antall strømforsyninger på LS C16A	46 Stk.
DC-egnethet	Ja
Elektrisk versjon	med intern driftsenhet, Dimbar
Lystekniske data	
lyskilde	LED
Nominell lysstrøm	2850 lm
Fargegjengivelsesindeks	> 80 Ra
Fargetoleranse	3
Strålevinkel	87,6 °
fargetemperatur	3000 K
lys farge	830
UGR	20.4
levetid	50000 h, L80
lyseffekt	86 lm/w
temperaturer	
Omgivelsestemperatur (min)	0 °C
Omgivelsestemperatur (maks.)	+25 °C
Monteringstype	
Monteringstype	Takmontering





TEXT.LICHTVERTEILUNG

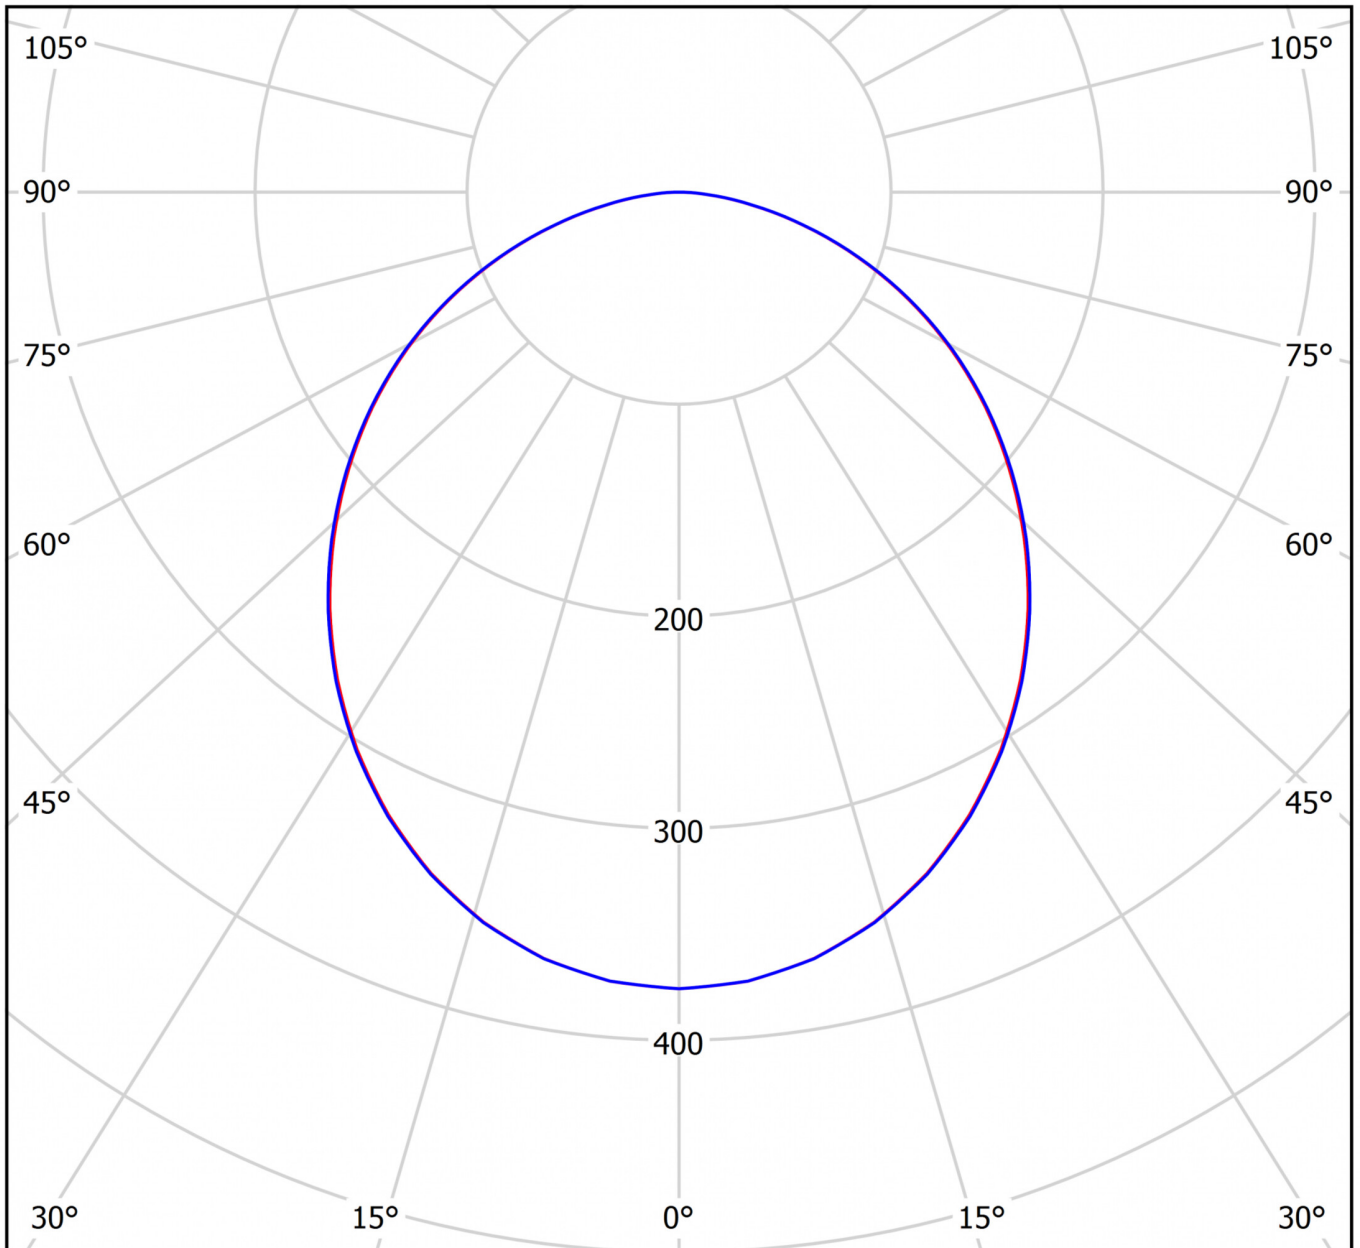

cd/klm

$\eta = 100\%$

— C0 - C180 — C90 - C270

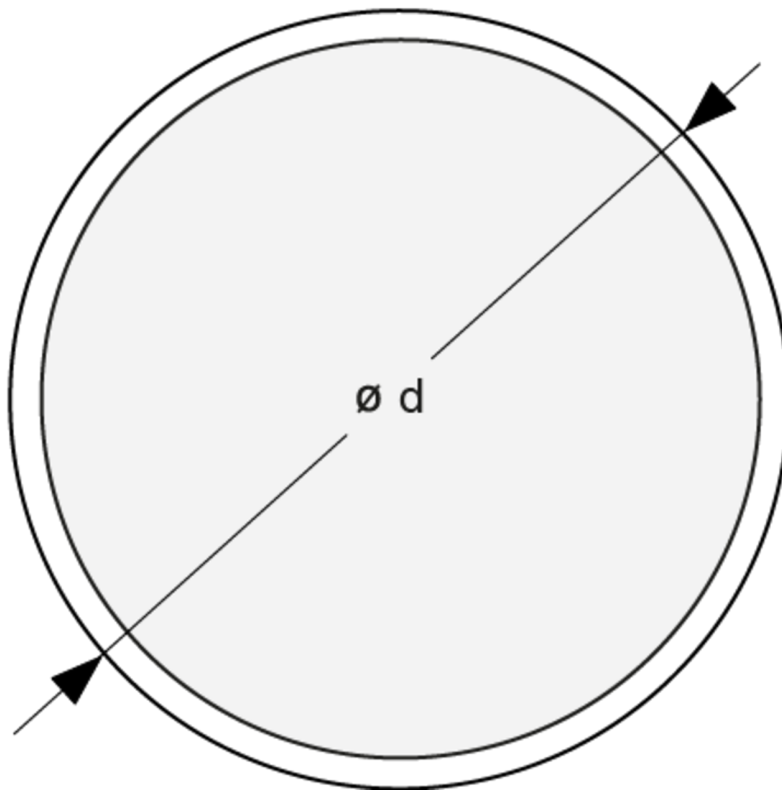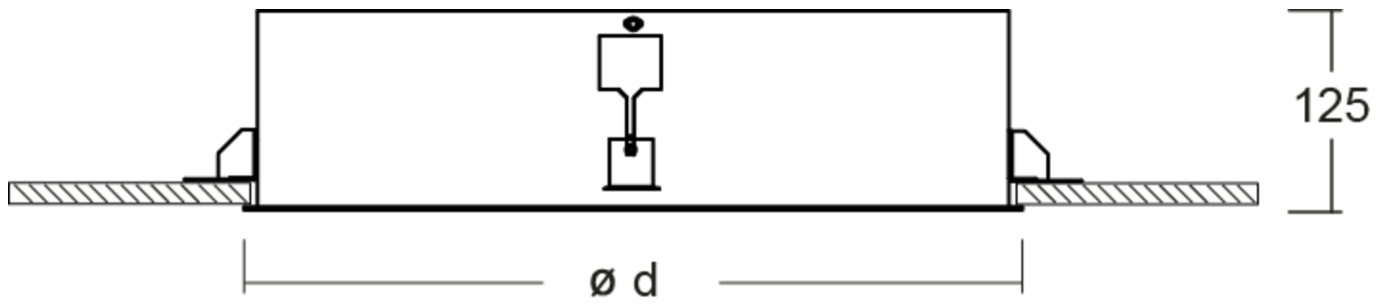

stand: 21.06.2024 - Det tas forbehold om tekniske endringer og feil.