



**Art.-Nr: YWDPO-REWD-7201-D**  
**LED luminaire "PORIO", wall / ceiling recessed mounting,**  
**round, 664x125mm, 72W, 6750lm, 3000K, CRI >80, IP20,**  
**white, Dali dimmable**

LED ceiling- and wall-mounted luminaire, PORIO series, recessed design, as the basic lighting for commercial and residential rooms. Housing made from steel plate, white, powder-coated. Diffuser made from plastic (PMMA), opal, UV-stabilised. Operating unit can be switched or dimmed (DALI dimmer), integrated. Version with CASAMBI Bluetooth control available. DC compatible.



Mer informasjon



## TEKNISKE DATA


Dimensjoner	
diameter	664 mm
Produktmål høyde	90 mm
Produktvekt	9.4 kg
Emballasjedimensjoner	
Emballasjedimensjoner lengde	680 mm
Emballasjemål bredde	680 mm
Emballasjemål høyde	140 mm
Vekt inkludert emballasje	9.6 kg
Farge	
Farge	Hvit
Koffertmateriale	
Koffertmateriale	aluminium
Sertifisering	
Sertifisering	CE
beskyttelses klasse	1
IP-beskyttelse)	IP20
Glødetrådtest	650°C
Elektrisk forbindelse	
Tilkoblingstverrsnitt	1.5 mm <sup>2</sup>



Dimming type	DALI
Systemytelse	72 W
Inngangsspenning AC	220-240V / 50-60Hz V
Startstrøm	34 A
Maktfaktor	0.98 PF
Innkoblingstid	193 µs
<b>Strømforsyning</b>	
Antall strømforsyninger på LS B10A	9 Stk.
Antall strømforsyninger på LS B16A	15 Stk.
Antall strømforsyninger på LS C10A	15 Stk.
Antall strømforsyninger på LS C16A	25 Stk.
DC-egnethet	Ja
Elektrisk versjon	med intern driftsenhet, Dimbar
<b>Lystekniske data</b>	
lyskilde	LED
Nominell lysstrøm	6750 lm
Fargegjengivelsesindeks	> 80 Ra
Fargetoleranse	3
Strålevinkel	87,6 °
fargetemperatur	3000 K
lys farge	830
UGR	20.7
levetid	50000 h, L80
lyseffekt	94 lm/w
<b>temperaturer</b>	
Omgivelsestemperatur (min)	0 °C
Omgivelsestemperatur (maks.)	+25 °C
<b>Monteringstype</b>	
Monteringstype	Takmontering





TEXT.LICHTVERTEILUNG

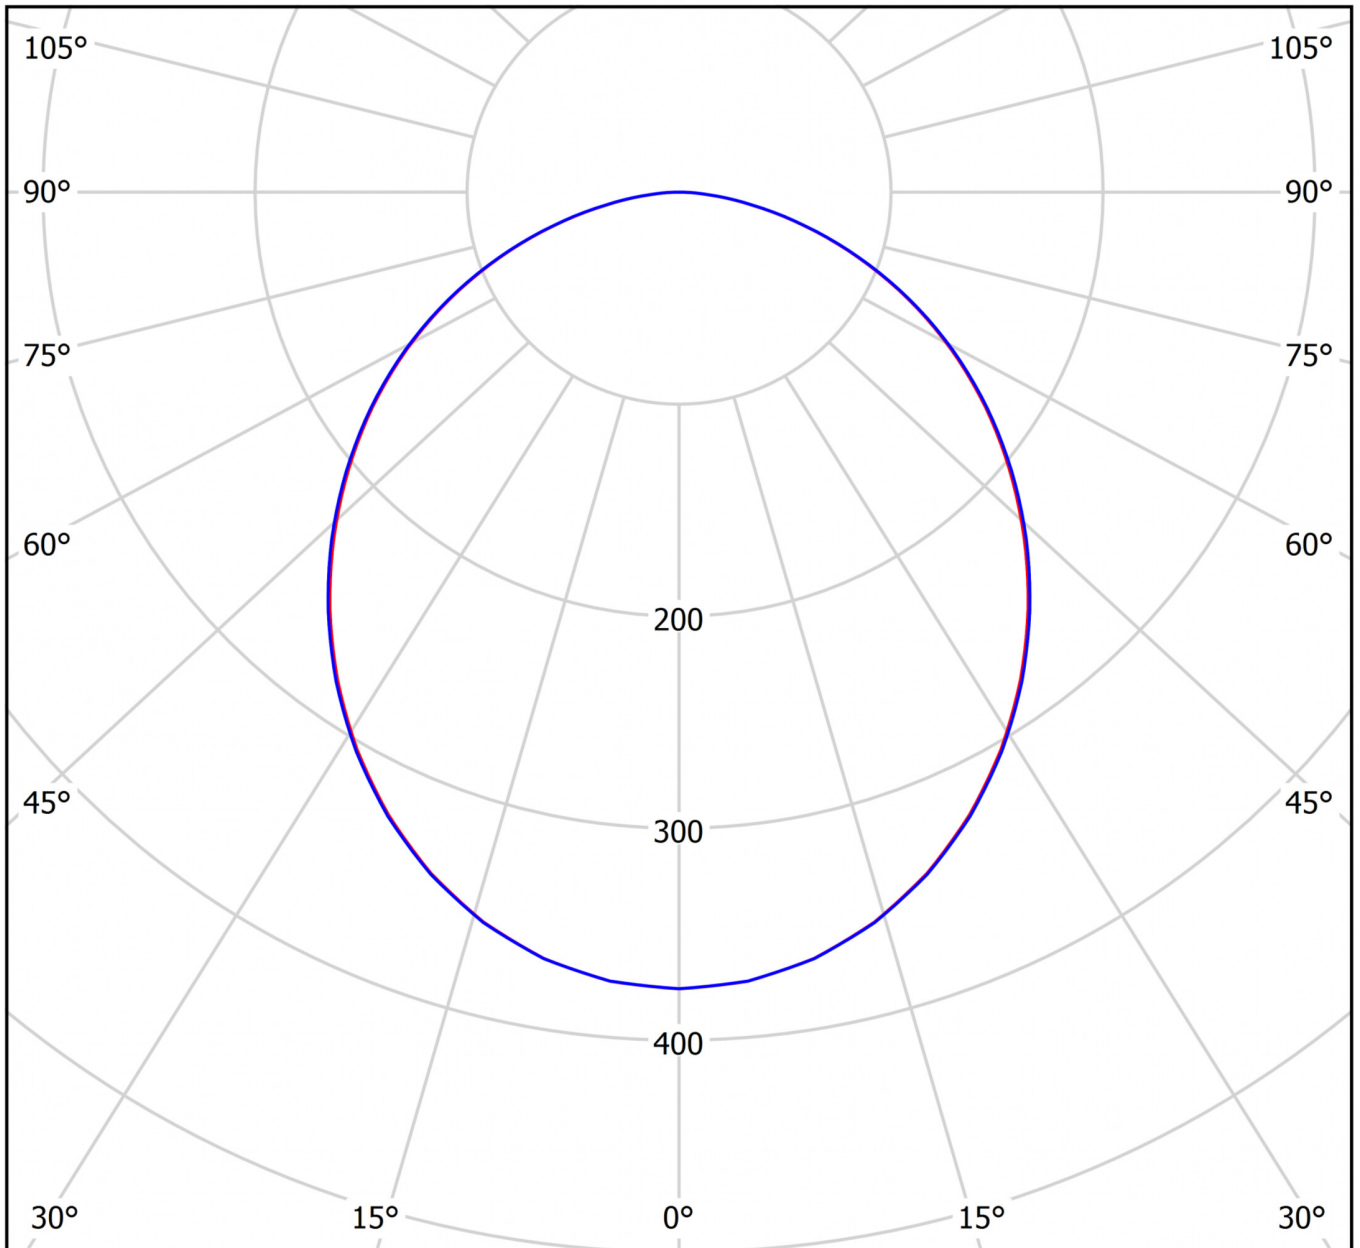

cd/klm

$\eta = 100\%$

— C0 - C180    — C90 - C270

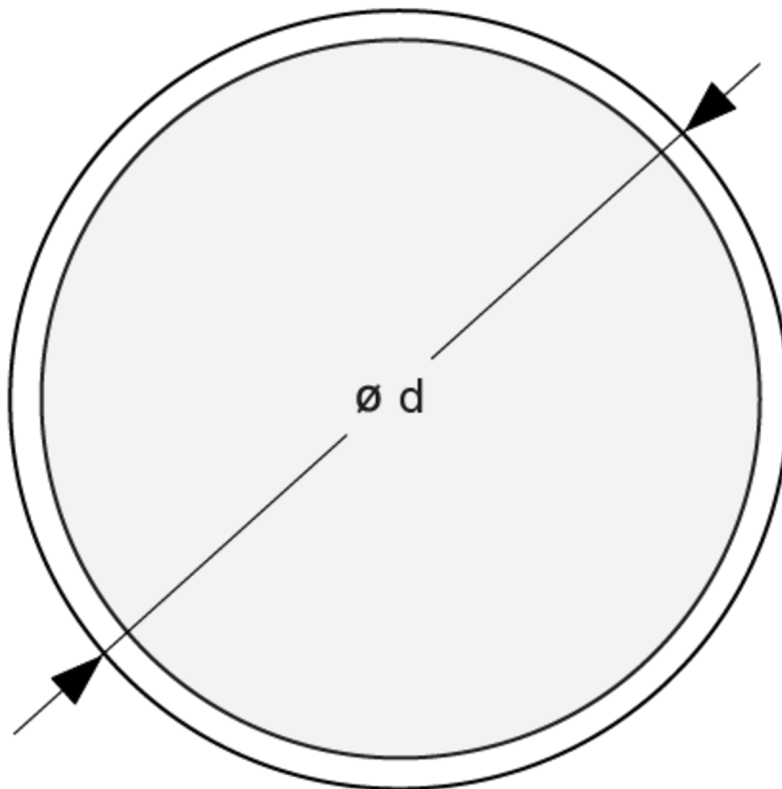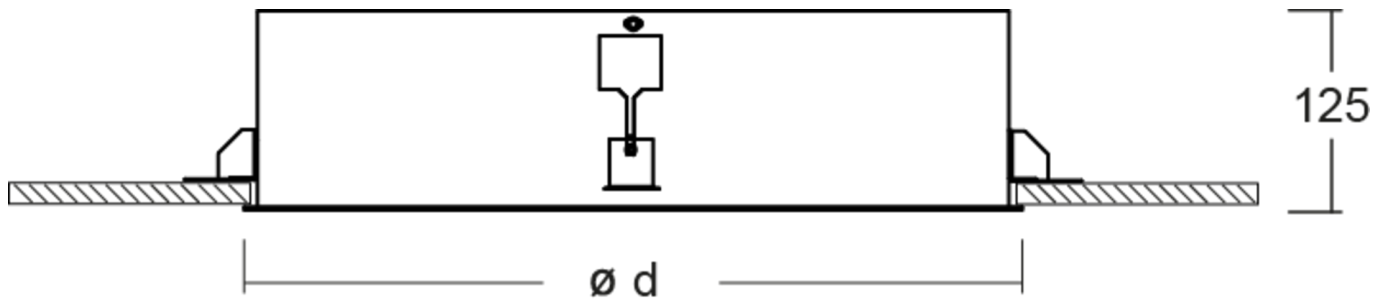

stand: 21.06.2024 - Det tas forbehold om tekniske endringer og feil.