



**Art.-Nr: YWDRO-RPND-1601-D**  
**LED pendant luminaire "RONDO", c-surface mounting, direct/  
indirect distribution, round, 400x62mm, 16W, 2100lm, 4000K,  
CRI >80, IP40, white, Dali dimmable**

LED ceiling- and wall-mounted luminaire, RONDO series, with direct/indirect beam, as the basic lighting for rooms in a commercial environment and at home. Housing made from aluminium, white, powder-coated. Diffuser made from plastic (PMMA), opal, UV-stabilised. Operating unit can be switched or dimmed (DALI dimmer), integrated. Version with CASAMBI Bluetooth control available. DC compatible.



Mer informasjon



## TEKNISKE DATA


Dimensjoner	
diameter	400 mm
Produktmål høyde	62 mm
Produktvekt	3.8 kg
Emballasjedimensjoner	
Emballasjedimensjoner lengde	505 mm
Emballasjemål bredde	405 mm
Emballasjemål høyde	100 mm
Vekt inkludert emballasje	4 kg
Farge	
Farge	Hvit
Koffertmateriale	
Koffertmateriale	aluminium
Sertifisering	
Sertifisering	CE, ENEC
beskyttelses klasse	1
IP-beskyttelse)	IP40
Glødetrådtest	650°C
Elektrisk forbindelse	
Tilkoblingstverrsnitt	1.5 mm <sup>2</sup>



Dimming type	DALI
Systemytelse	16 W
Inngangsspenning AC	220-240V / 50-60Hz V
Startstrøm	35 A
Maktfaktor	0.98 PF
Innkoblingstid	170 µs
<b>Strømforsyning</b>	
Antall strømforsyninger på LS B10A	13 Stk.
Antall strømforsyninger på LS B16A	22 Stk.
Antall strømforsyninger på LS C10A	21 Stk.
Antall strømforsyninger på LS C16A	36 Stk.
DC-egnethet	Ja
Elektrisk versjon	med intern driftsenhet, Dimbar
<b>Lystekniske data</b>	
lyskilde	LED
Nominell lysstrøm	2100 lm
Fargegjengivelsesindeks	> 80 Ra
Fargetoleranse	3
Strålevinkel	105,6/106 °
fargetemperatur	4000 K
lys farge	840
UGR	22.1
levetid	50000 h, L80
lyseffekt	131 lm/w
<b>temperaturer</b>	
Omgivelsestemperatur (min)	0 °C
Omgivelsestemperatur (maks.)	+25 °C
<b>Monteringstype</b>	
Monteringstype	Pendel




TEXT.LICHTVERTEILUNG

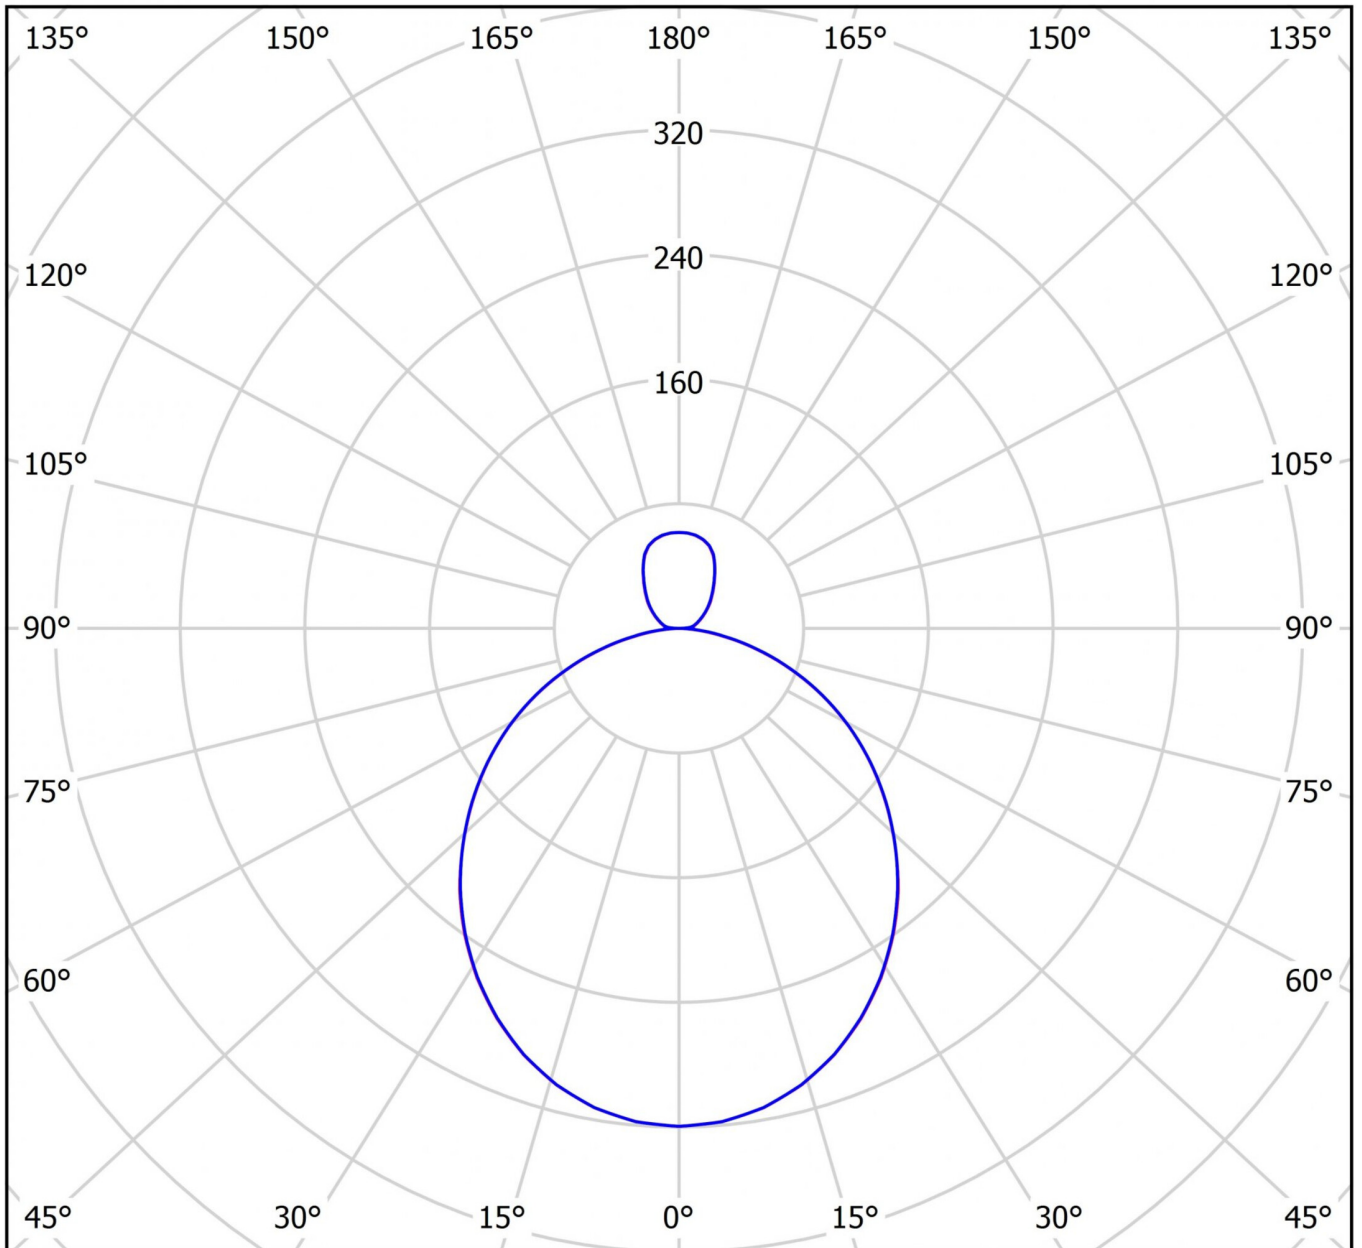

cd/klm

$\eta = 100\%$

— C0 - C180    — C90 - C270

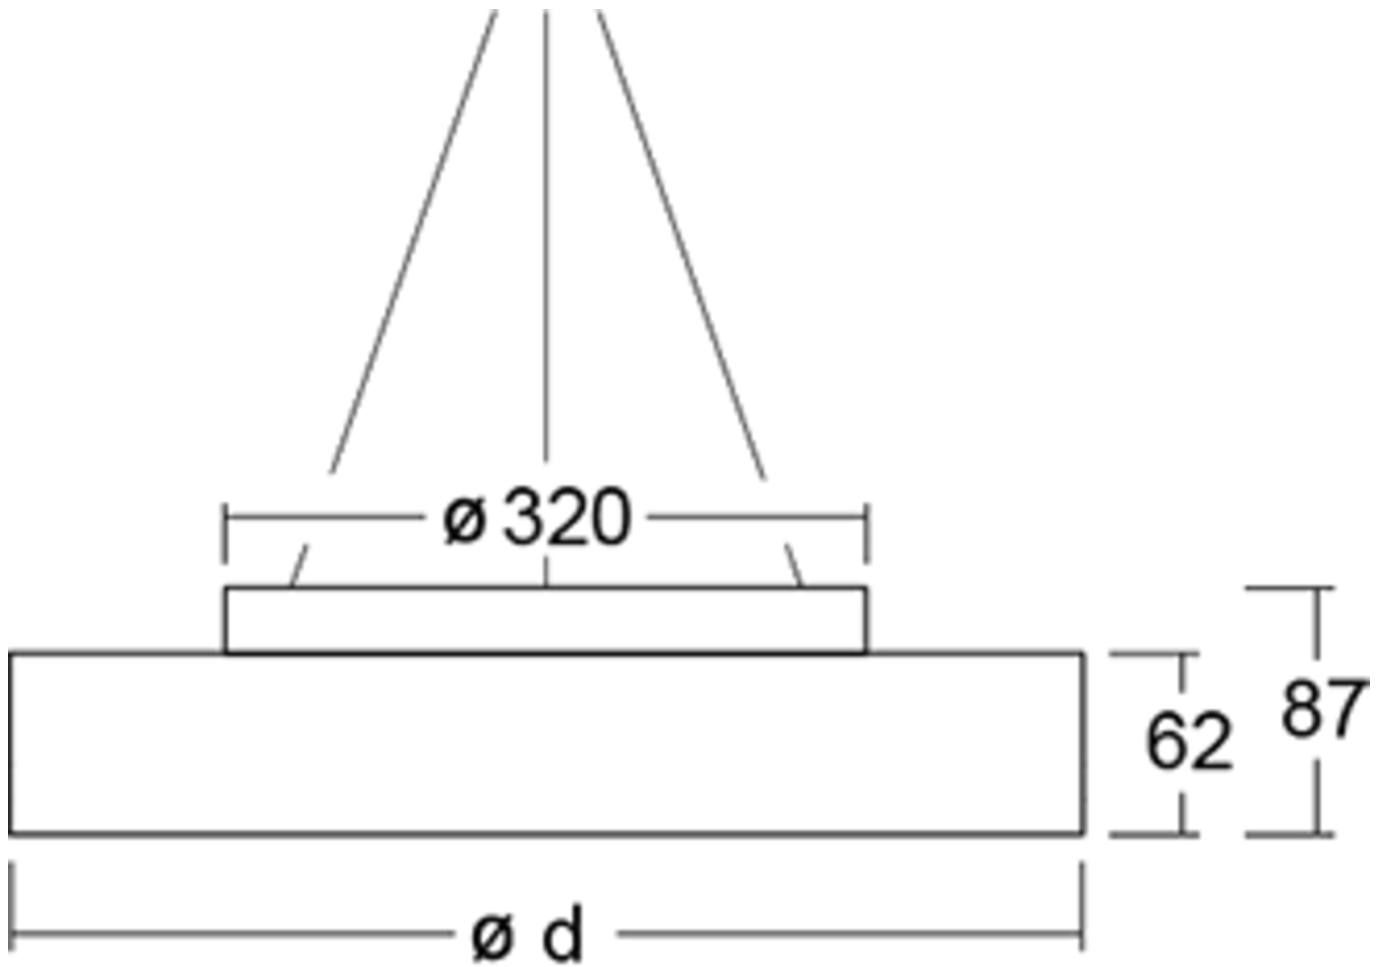

stand: 21.06.2024 - Det tas forbehold om tekniske endringer og feil.