



**Art.-Nr: YWDRO-RPWD-3901-D**  
**LED pendant luminaire "RONDO", c-surface mounting, direct/indirect distribution, round, 600x62mm, 39W, 5200lm, 3000K, CRI >80, IP40, white, Dali dimmable**

LED ceiling- and wall-mounted luminaire, RONDO series, with direct/indirect beam, as the basic lighting for rooms in a commercial environment and at home. Housing made from aluminium, white, powder-coated. Diffuser made from plastic (PMMA), opal, UV-stabilised. Operating unit can be switched or dimmed (DALI dimmer), integrated. Version with CASAMBI Bluetooth control available. DC compatible.



[Mer informasjon](#)

## TEKNISKE DATA


Dimensjoner	
diameter	600 mm
Produktmål høyde	62 mm
Produktvekt	5.7 kg
Emballasjedimensjoner	
Emballasjedimensjoner lengde	610 mm
Emballasjemål bredde	610 mm
Emballasjemål høyde	100 mm
Vekt inkludert emballasje	5.9 kg
Farge	
Farge	Hvit
Koffertmateriale	
Koffertmateriale	aluminium
Sertifisering	
Sertifisering	CE, ENEC
beskyttelses klasse	1
IP-beskyttelse)	IP40
Glødetrådtest	650°C
Elektrisk forbindelse	



Tilkoblingstverrsnitt	1.5 mm <sup>2</sup>
Dimming type	DALI
Systemytelse	39 W
Inngangsspenning AC	220-240V / 50-60Hz V
Startstrøm	33 A
Maktfaktor	98 PF
Innkoblingstid	162 µs
<b>Strømforsyning</b>	
Antall strømforsyninger på LS B10A	13 Stk.
Antall strømforsyninger på LS B16A	21 Stk.
Antall strømforsyninger på LS C10A	22 Stk.
Antall strømforsyninger på LS C16A	36 Stk.
DC-egnethet	Ja
Elektrisk versjon	med intern driftsenhet, Dimbar
<b>Lystekniske data</b>	
lyskilde	LED
Nominell lysstrøm	5200 lm
Fargegjengivelsesindeks	> 80 Ra
Fargetoleranse	3
Strålevinkel	105,6 °
fargetemperatur	3000 K
lys farge	830
UGR	20.8
levetid	50000 h, L80
lyseffekt	133 lm/w
<b>temperaturer</b>	
Omgivelsestemperatur (min)	0 °C
Omgivelsestemperatur (maks.)	+25 °C
<b>Monteringstype</b>	
Monteringstype	Pendel




TEXT.LICHTVERTEILUNG

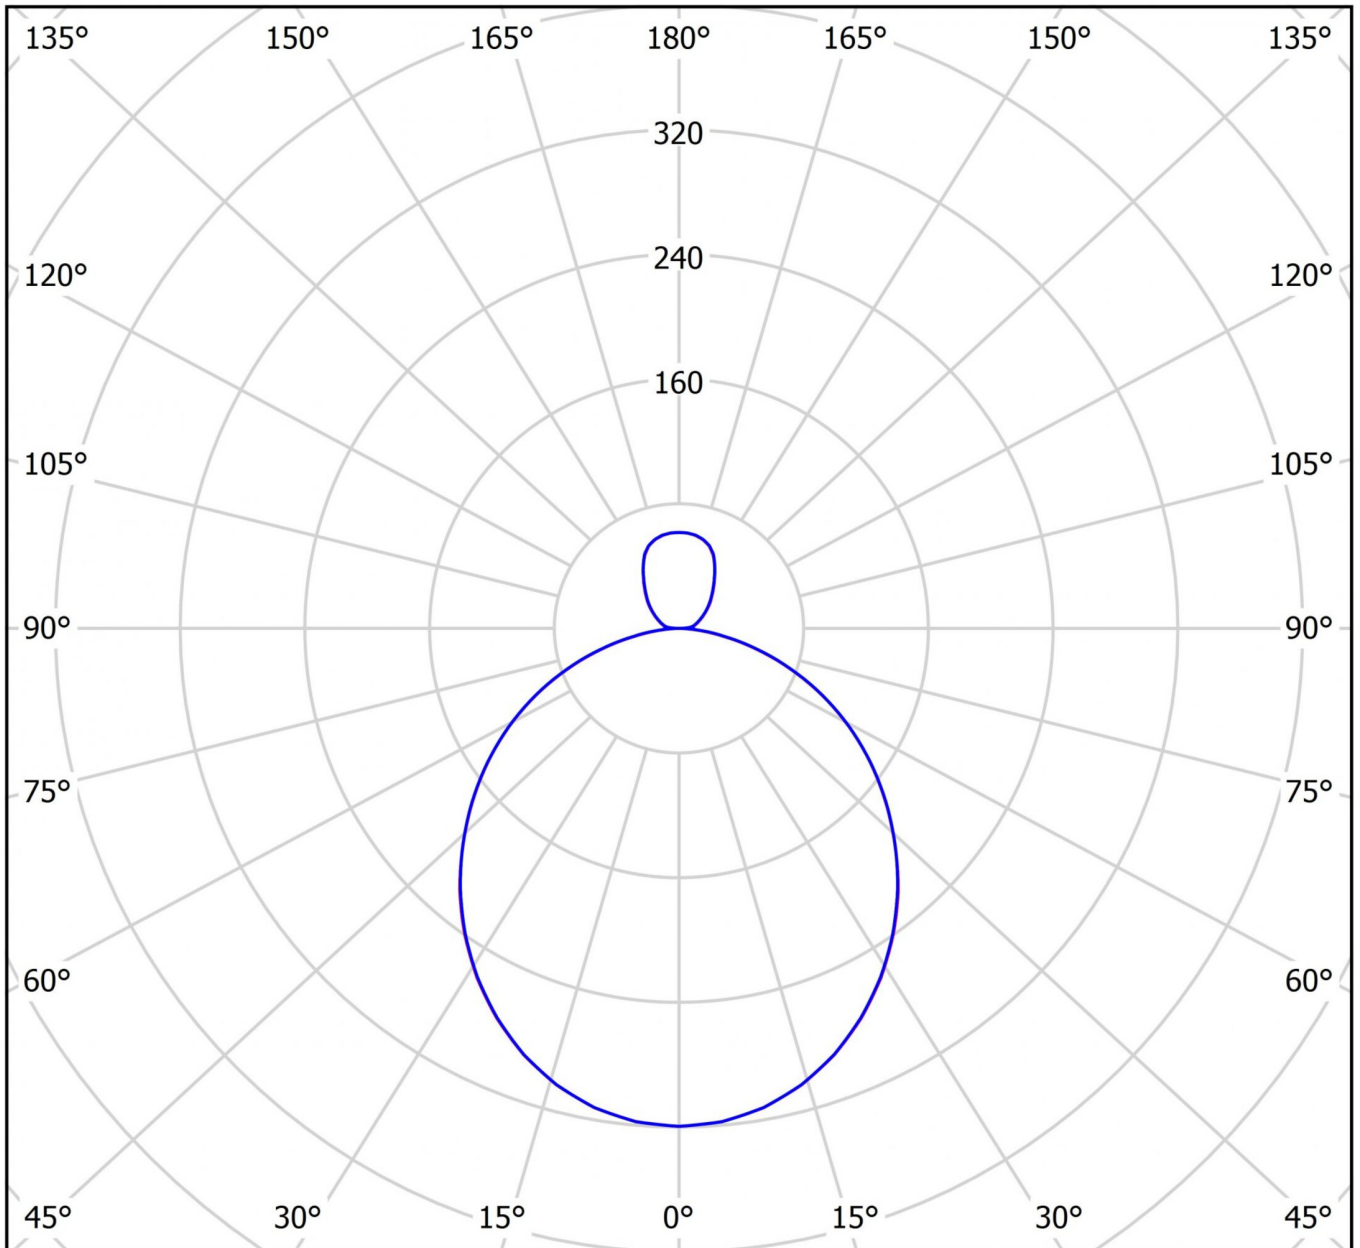

cd/klm

$\eta = 100\%$

— C0 - C180    — C90 - C270

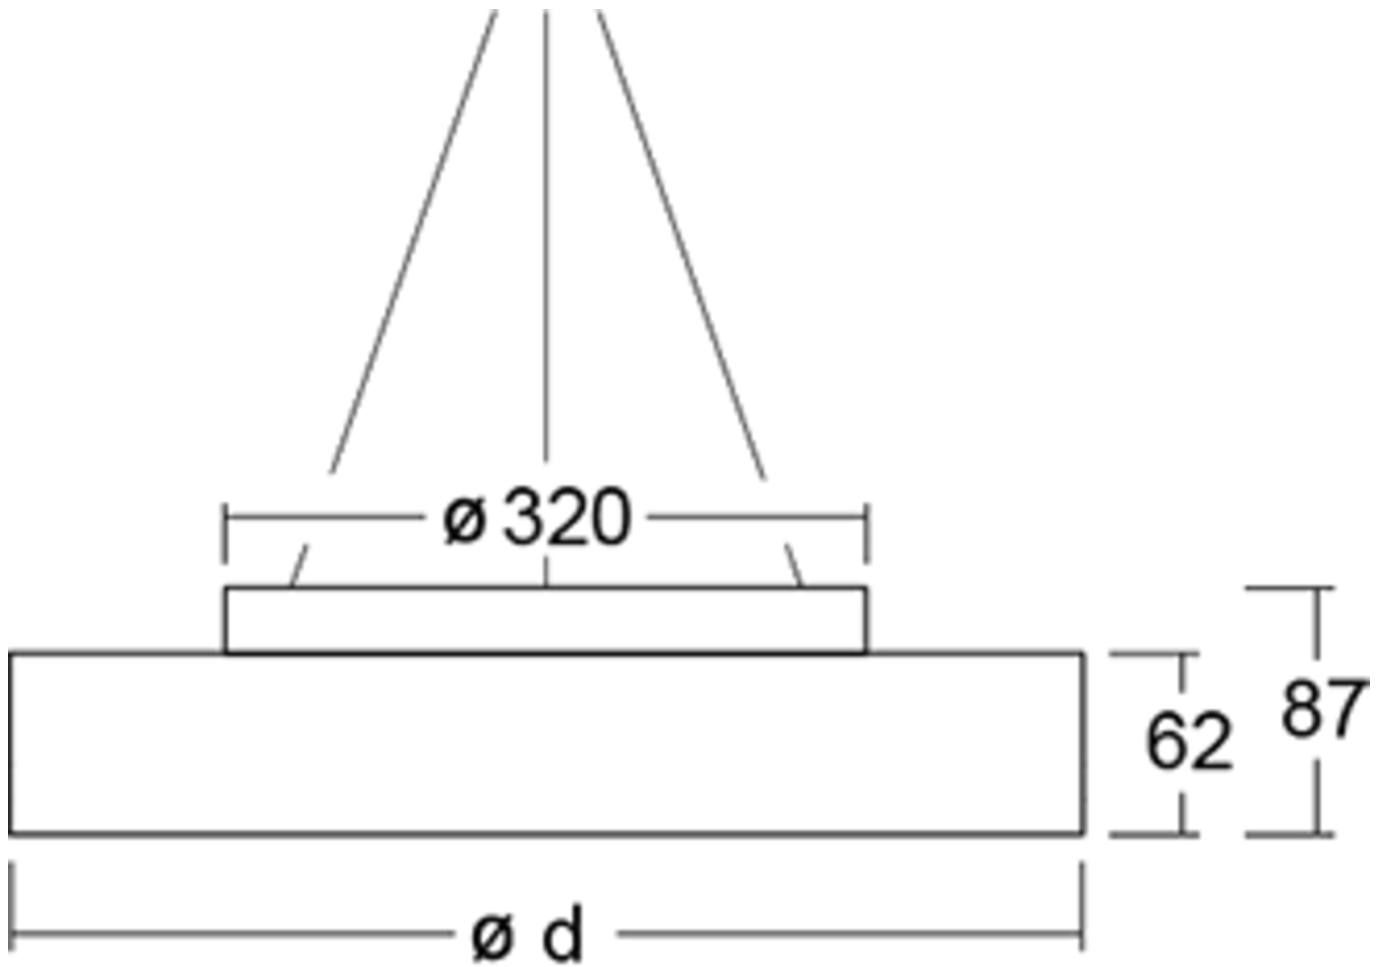

stand: 21.06.2024 - Det tas forbehold om tekniske endringer og feil.