




**Art.-Nr: YWDZO-LAWS-2701-DU**  
**LED luminaire "ZOLA"**  
**ceiling surface mounting, rectangular,**

LED ceiling luminaire, ZOLA series, with direct and direct/indirect beam. Housing made from aluminium, white, powder-coated. Parabolic louvre diffuser, matt. Operating unit can be switched or dimmed (DALI dimmer), integrated. UGR < 16 and screen-compliant in accordance with EN 12464-1. Version with CASAMBI® Bluetooth control available. DC compatible.

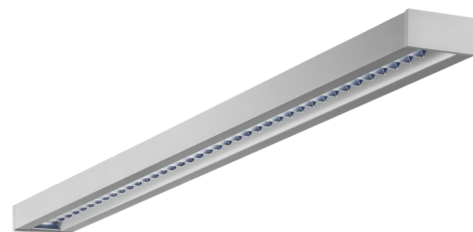

Mer informasjon



TEKNISKE DATA


Dimensjoner	
Produktdimensjoner lengde	1415 mm
Produktdimensjoner bredde	125 mm
Produktmål høyde	50 mm
Produktvekt	3.7 kg
Emballasjedimensjoner	
Emballasjedimensjoner lengde	1550 mm
Emballasjemål bredde	130 mm
Emballasjemål høyde	60 mm
Vekt inkludert emballasje	3.9 kg
Farge	
Farge	Hvit
Koffertmateriale	
Koffertmateriale	aluminium
Sertifisering	
Sertifisering	CE
beskyttelses klasse	1
IP-beskyttelse)	IP20
Glødetrådtest	650°C
Elektrisk forbindelse	
Tilkoblingstverrsnitt	1.5 mm <sup>2</sup>



Systemytelse	26 W
Inngangsspenning AC	220-240V / 50-60Hz V
Startstrøm	41 A
Maktfaktor	0.95 PF
<b>Strømforsyning</b>	
Antall strømforsyninger på LS B10A	16 Stk.
Antall strømforsyninger på LS B16A	26 Stk.
Antall strømforsyninger på LS C10A	26 Stk.
Antall strømforsyninger på LS C16A	43 Stk.
DC-egnethet	Ja
Elektrisk versjon	med intern driftsenhet, Byttbar
<b>Lystekniske data</b>	
lyskilde	LED
Nominell lysstrøm	3400 lm
Fargegjengivelsesindeks	> 80 Ra
Fargetoleranse	2
Strålevinkel	72,8/64,8 °
fargetemperatur	3000 K
lys farge	830
UGR	14.2
levetid	50000 h, L80
lyseffekt	131 lm/w
<b>temperaturer</b>	
Omgivelsestemperatur (min)	0 °C
Omgivelsestemperatur (maks.)	+25 °C
<b>Monteringstype</b>	
Monteringstype	Takkonstruksjon



TEXT.LICHTVERTEILUNG

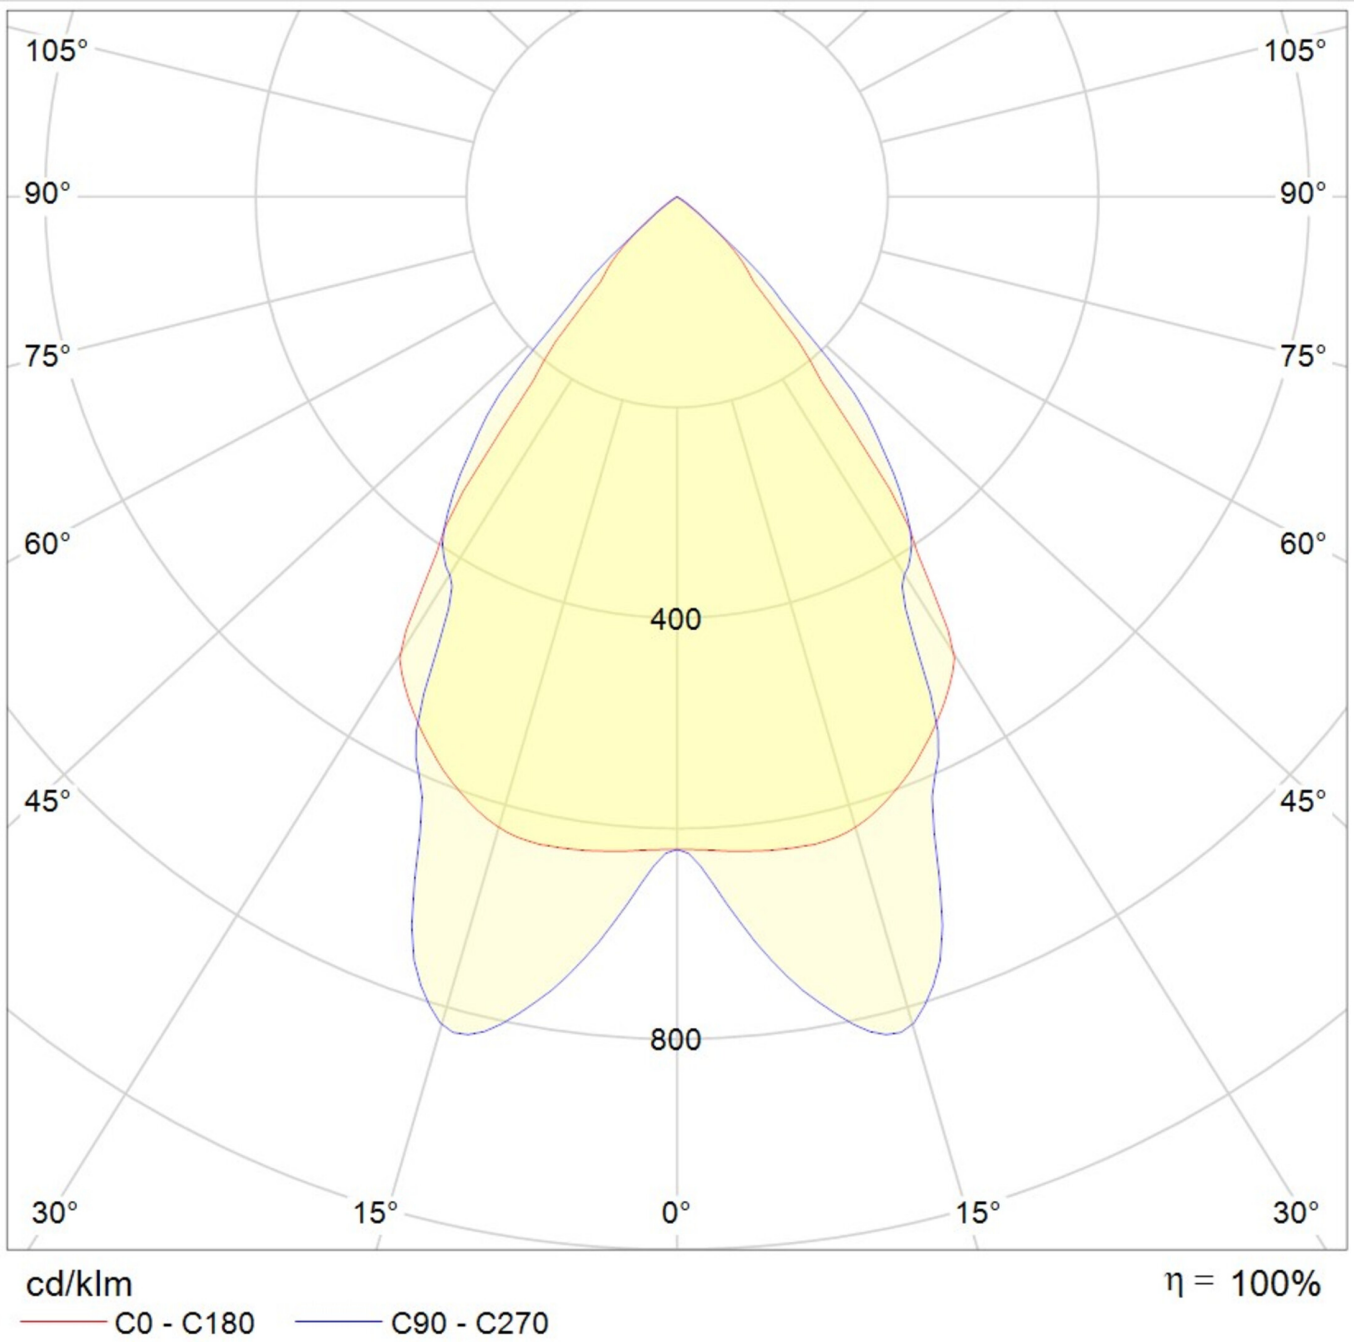



stand: 21.06.2024 - Det tas forbehold om tekniske endringer og feil.