




Art.-Nr: YWDZO-PANS-4001-DU

LED pendant luminaire "ZOLA", c- surface mounting direct distribution, 1415x50x125mm, 40W, 4700lm, 4000K, CRI >80, IP20, UGR <19, switchable

LED ceiling luminaire, ZOLA series, with direct and direct/indirect beam. Housing made from aluminium, white, powder-coated. Parabolic louvre diffuser, matt. Operating unit can be switched or dimmed (DALI dimmer), integrated. UGR < 16 and screen-compliant in accordance with EN 12464-1. Version with CASAMBI Bluetooth control available. DC compatible.

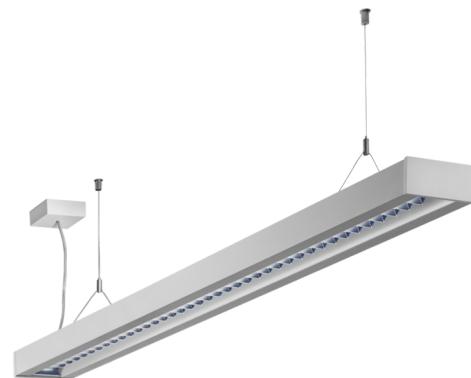

Mer informasjon



TEKNISKE DATA


| Dimensjoner | |
|------------------------------|-----------|
| Produktdimensjoner lengde | 1415 mm |
| Produktdimensjoner bredde | 50 mm |
| Produktmål høyde | 125 mm |
| Produktvekt | 3.7 kg |
| Emballasjedimensjoner | |
| Emballasjedimensjoner lengde | 1550 mm |
| Emballasjemål bredde | 130 mm |
| Emballasjemål høyde | 60 mm |
| Vekt inkludert emballasje | 3.9 kg |
| Farge | |
| Farge | Hvit |
| Koffertmateriale | |
| Koffertmateriale | aluminium |
| Sertifisering | |
| Sertifisering | CE |
| beskyttelses klasse | 1 |
| IP-beskyttelse) | IP20 |
| Glødetrådtest | 650°C |
| Elektrisk forbindelse | |



| | |
|------------------------------------|---------------------------------|
| Tilkoblingstverrsnitt | 1.5 mm ² |
| Systemytelse | 40 W |
| Inngangsspenning AC | 220-240V / 50-60Hz V |
| Startstrøm | 41 A |
| Maktfaktor | 0.95 PF |
| Strømforsyning | |
| Antall strømforsyninger på LS B10A | 16 Stk. |
| Antall strømforsyninger på LS B16A | 26 Stk. |
| Antall strømforsyninger på LS C10A | 26 Stk. |
| Antall strømforsyninger på LS C16A | 43 Stk. |
| DC-egnethet | Ja |
| Elektrisk versjon | med intern driftsenhet, Byttbar |
| Lystekniske data | |
| lyskilde | LED |
| Nominell lysstrøm | 4700 lm |
| Fargegjengivelsesindeks | > 80 Ra |
| Fargetoleranse | 2 |
| Strålevinkel | 72,8/64,8 ° |
| fargetemperatur | 4000 K |
| lys farge | 840 |
| UGR | 15.5 |
| levetid | 50000 h, L80 |
| lyseffekt | 118 lm/w |
| temperaturer | |
| Omgivelsestemperatur (min) | 0 °C |
| Omgivelsestemperatur (maks.) | +25 °C |
| Monteringstype | |
| Monteringstype | Pendel |



TEXT.LICHTVERTEILUNG

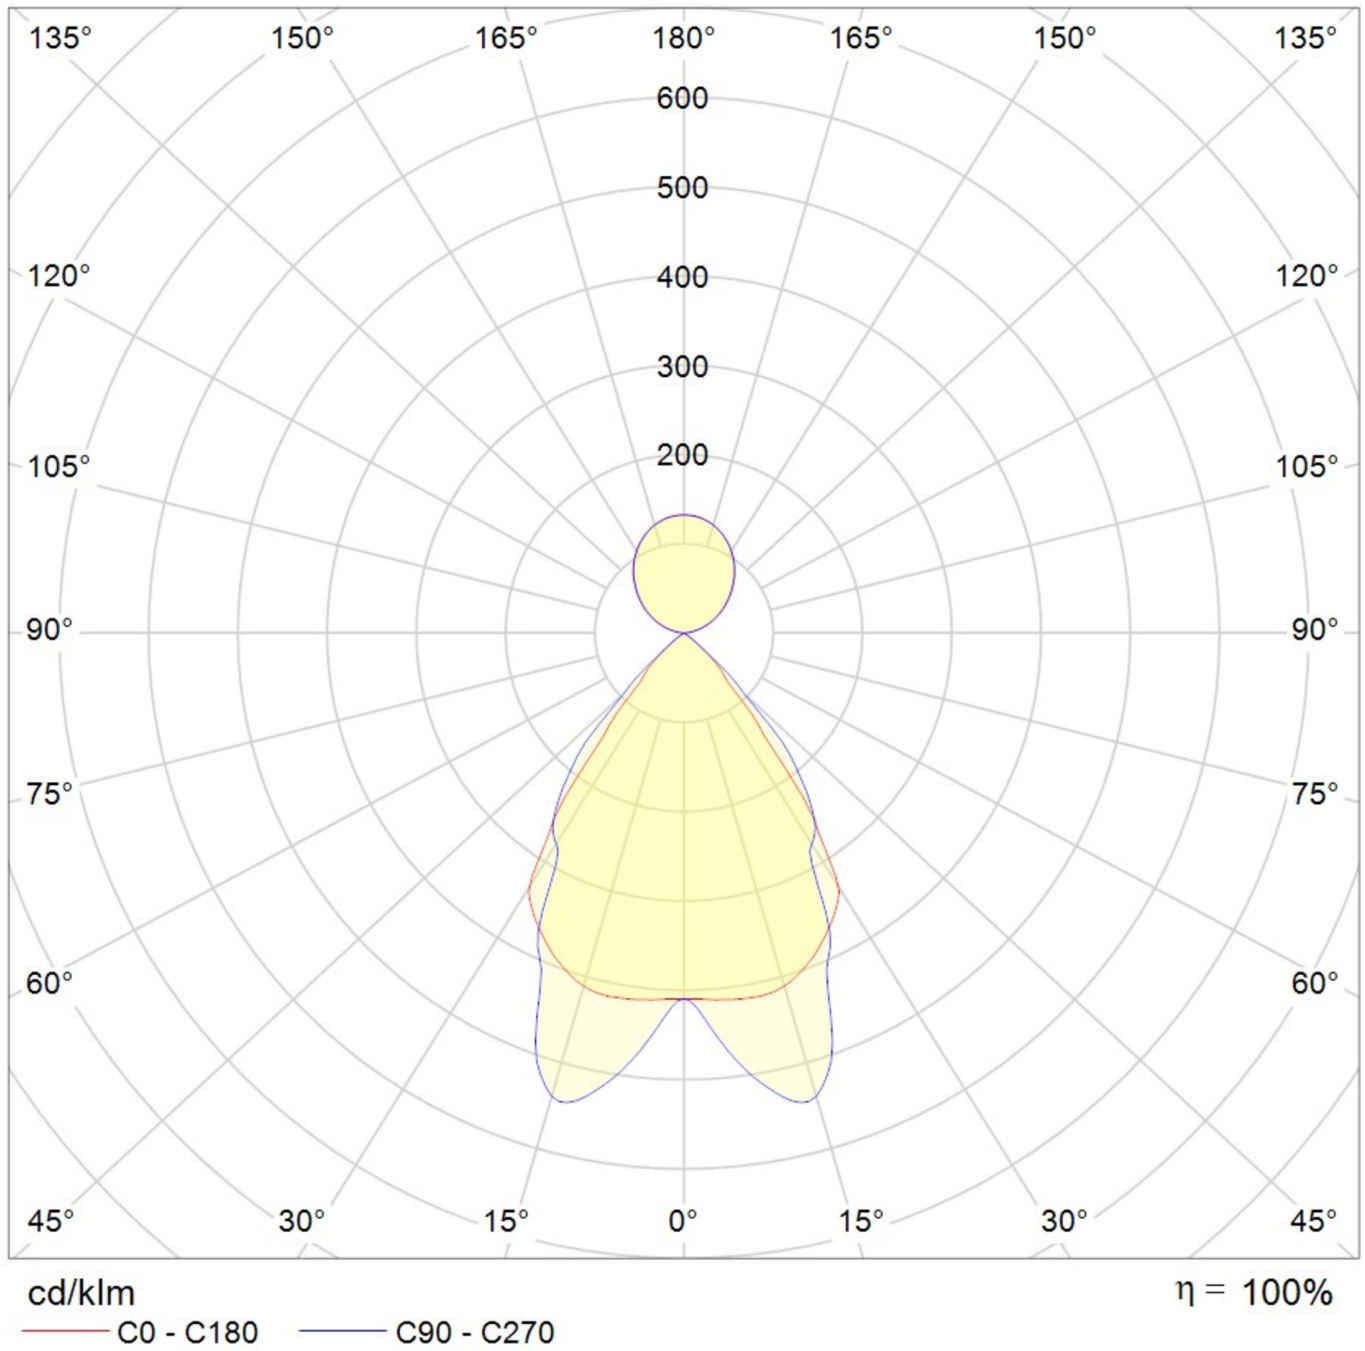



stand: 21.06.2024 - Det tas forbehold om tekniske endringer og feil.