




**Art.-Nr: YWDZO-PANS-4701-DUI**  
**LED pendant luminaire "ZOLA", c- surface mounting, direct / indirect distribution, 1135x50x125mm, 47W, 5700lm, 4000K, CRI >80, IP20, UGR <19, switchable**

LED ceiling luminaire, ZOLA series, with direct and direct/indirect beam. Housing made from aluminium, white, powder-coated. Parabolic louvre diffuser, matt. Operating unit can be switched or dimmed (DALI dimmer), integrated. UGR < 16 and screen-compliant in accordance with EN 12464-1. Version with CASAMBI Bluetooth control available. DC compatible.

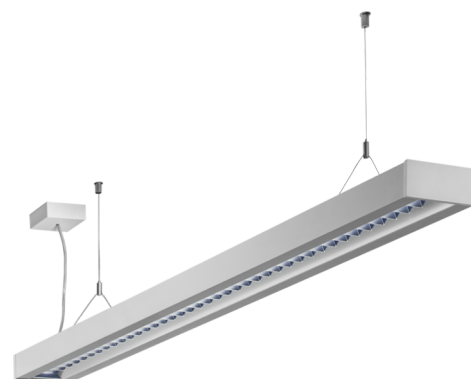

Mer informasjon



## TEKNISKE DATA


| Dimensjoner                  |           |
|------------------------------|-----------|
| Produktdimensjoner lengde    | 1135 mm   |
| Produktdimensjoner bredde    | 50 mm     |
| Produktmål høyde             | 125 mm    |
| Produktvekt                  | 3.1 kg    |
| Emballasjedimensjoner        |           |
| Emballasjedimensjoner lengde | 1270 mm   |
| Emballasjemål bredde         | 130 mm    |
| Emballasjemål høyde          | 60 mm     |
| Vekt inkludert emballasje    | 3.3 kg    |
| Farge                        |           |
| Farge                        | Hvit      |
| Koffertmateriale             |           |
| Koffertmateriale             | aluminium |
| Sertifisering                |           |
| Sertifisering                | CE        |
| beskyttelses klasse          | 1         |
| IP-beskyttelse)              | IP20      |
| Glødetrådtest                | 650°C     |
| Elektrisk forbindelse        |           |





|                                    |                                 |
|------------------------------------|---------------------------------|
| Tilkoblingstverrsnitt              | 1.5 mm <sup>2</sup>             |
| Systemytelse                       | 47 W                            |
| Inngangsspenning AC                | 220-240V / 50-60Hz V            |
| Startstrøm                         | 41 A                            |
| Maktfaktor                         | 0.95 PF                         |
| <b>Strømforsyning</b>              |                                 |
| Antall strømforsyninger på LS B10A | 16 Stk.                         |
| Antall strømforsyninger på LS B16A | 26 Stk.                         |
| Antall strømforsyninger på LS C10A | 26 Stk.                         |
| Antall strømforsyninger på LS C16A | 43 Stk.                         |
| DC-egnethet                        | Ja                              |
| Elektrisk versjon                  | med intern driftsenhet, Byttbar |
| <b>Lystekniske data</b>            |                                 |
| lyskilde                           | LED                             |
| Nominell lysstrøm                  | 5700 lm                         |
| Fargegjengivelsesindeks            | > 80 Ra                         |
| Fargetoleranse                     | 2                               |
| Strålevinkel                       | 72,8/64,8 °                     |
| fargetemperatur                    | 4000 K                          |
| lys farge                          | 840                             |
| UGR                                | 15.5                            |
| levetid                            | 50000 h, L80                    |
| lyseffekt                          | 121 lm/w                        |
| <b>temperaturer</b>                |                                 |
| Omgivelsestemperatur (min)         | 0 °C                            |
| Omgivelsestemperatur (maks.)       | +25 °C                          |
| <b>Monteringstype</b>              |                                 |
| Monteringstype                     | Pendel                          |



TEXT.LICHTVERTEILUNG

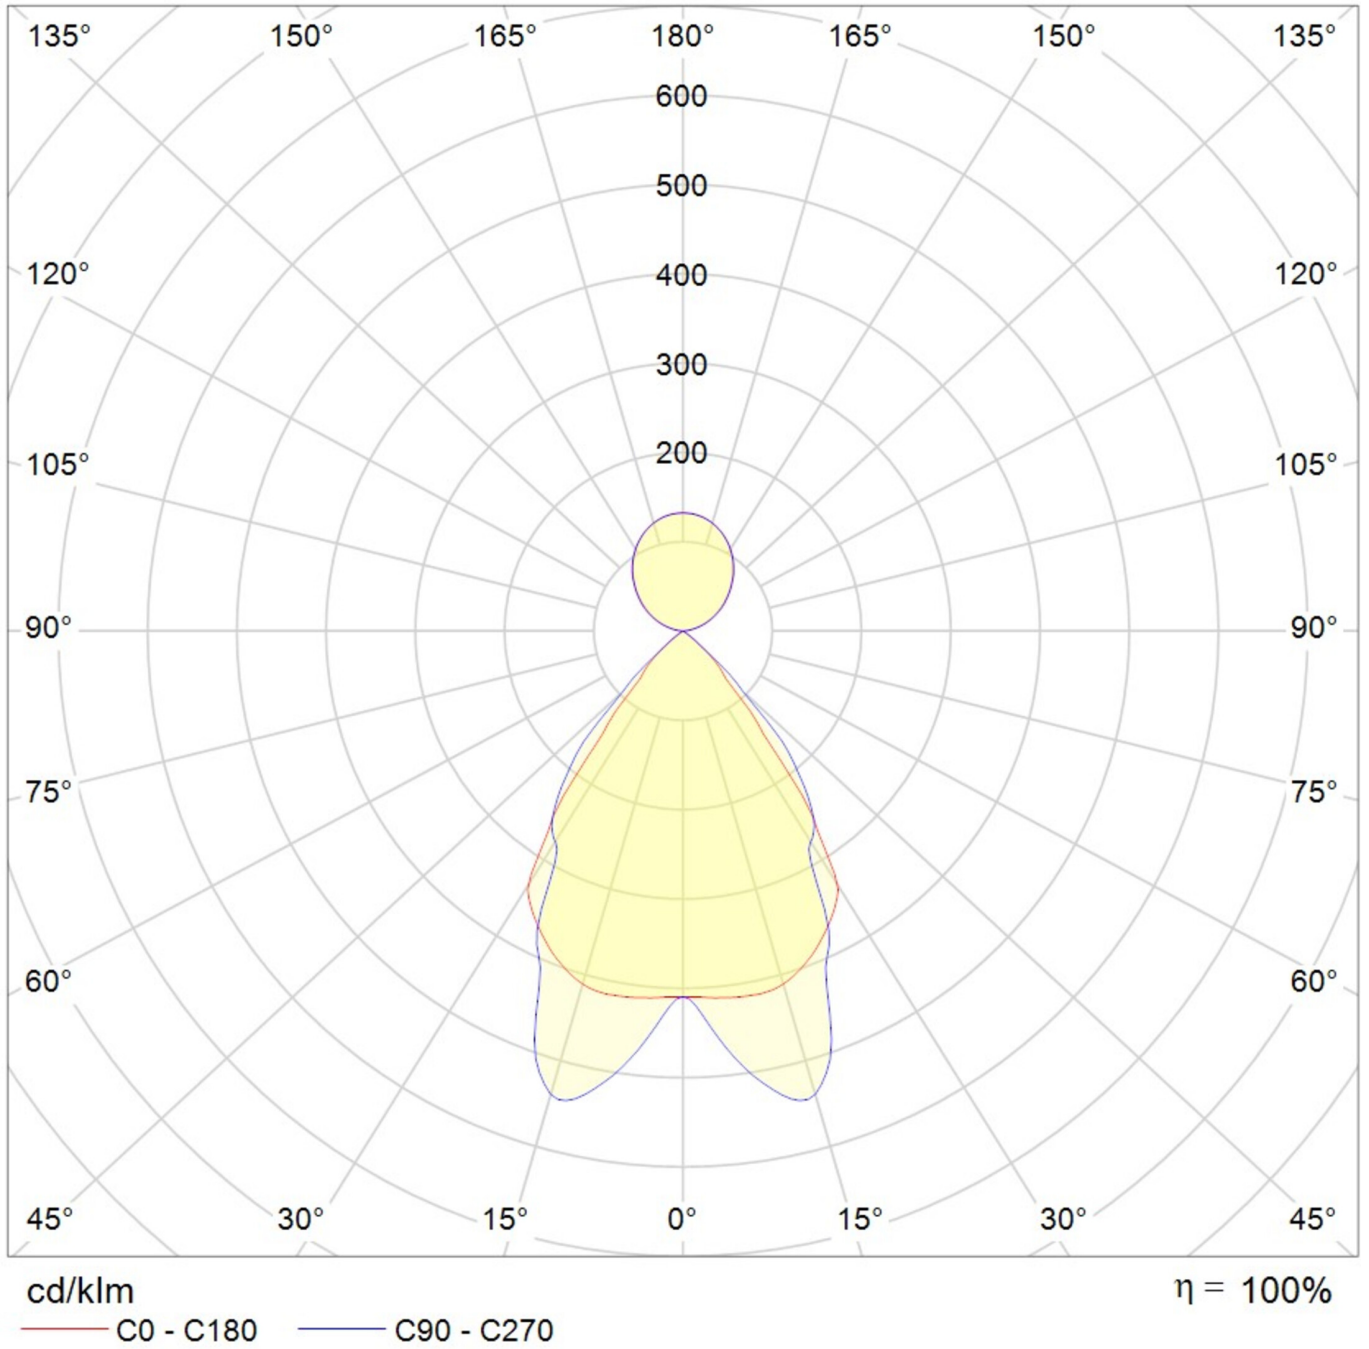

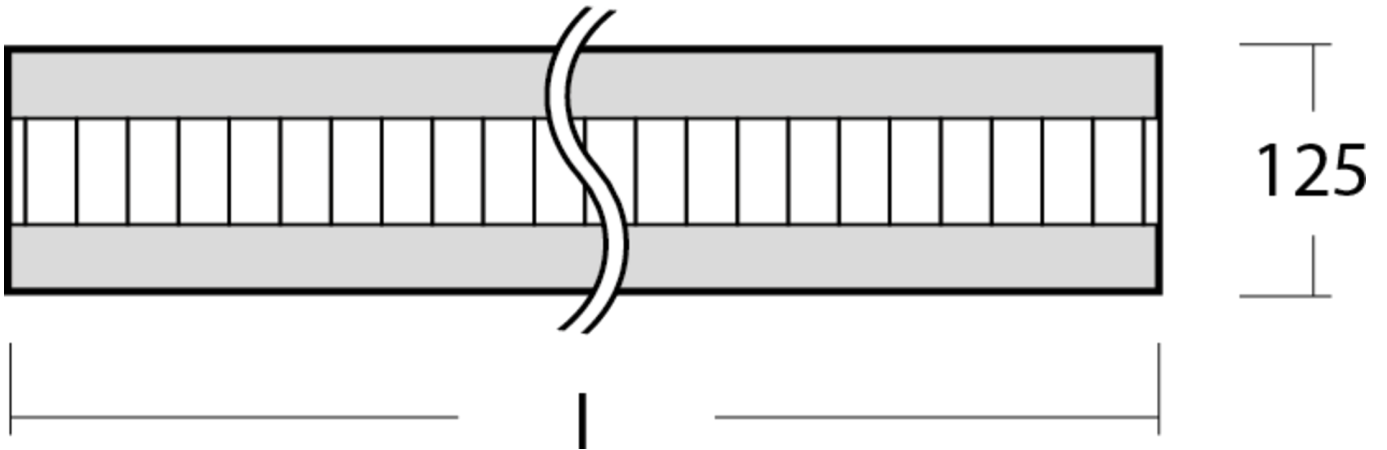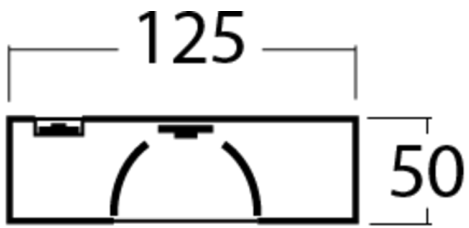

stand: 21.06.2024 - Det tas forbehold om tekniske endringer og feil.