




**Art.-Nr: YWDZO-PAWD-2201-DU**  
**LED pendant luminaire "ZOLA", ceiling surface mounting,**  
**direct distribution, 1135x50x125mm, 22W, 2600lm, 3000K,**  
**CRI >80, IP20, UGR <19, Dali dimmable**

LED ceiling luminaire, ZOLA series, with direct and direct/indirect beam. Housing made from aluminium, white, powder-coated. Parabolic louvre diffuser, matt. Operating unit can be switched or dimmed (DALI dimmer), integrated. UGR < 16 and screen-compliant in accordance with EN 12464-1. Version with CASAMBI Bluetooth control available. DC compatible.

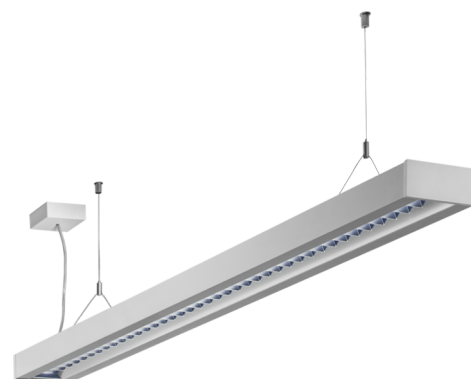

Mer informasjon



## TEKNISKE DATA


Dimensjoner	
Produktdimensjoner lengde	1135 mm
Produktdimensjoner bredde	50 mm
Produktmål høyde	125 mm
Produktvekt	3.1 kg
Emballasjedimensjoner	
Emballasjedimensjoner lengde	1270 mm
Emballasjemål bredde	130 mm
Emballasjemål høyde	60 mm
Vekt inkludert emballasje	3.3 kg
Farge	
Farge	Hvit
Koffertmateriale	
Koffertmateriale	aluminium
Sertifisering	
Sertifisering	CE
beskyttelses klasse	1
IP-beskyttelse)	IP20
Glødetrådtest	650°C
Elektrisk forbindelse	





Tilkoblingstverrsnitt	1.5 mm <sup>2</sup>
Dimming type	DALI
Systemytelse	22 W
Inngangsspenning AC	220-240V / 50-60Hz V
Startstrøm	28 A
Maktfaktor	0.98 PF
<b>Strømforsyning</b>	
Antall strømforsyninger på LS B10A	14 Stk.
Antall strømforsyninger på LS B16A	23 Stk.
Antall strømforsyninger på LS C10A	23 Stk.
Antall strømforsyninger på LS C16A	38 Stk.
DC-egnethet	Ja
Elektrisk versjon	med intern driftsenhet, Dimbar
<b>Lystekniske data</b>	
lyskilde	LED
Nominell lysstrøm	2600 lm
Fargegjengivelsesindeks	> 80 Ra
Fargetoleranse	2
Strålevinkel	72,8/64,8 °
fargetemperatur	3000 K
lys farge	830
UGR	14.2
levetid	50000 h, L80
lyseffekt	118 lm/w
<b>temperaturer</b>	
Omgivelsestemperatur (min)	0 °C
Omgivelsestemperatur (maks.)	+25 °C
<b>Monteringstype</b>	
Monteringstype	Pendel



TEXT.LICHTVERTEILUNG

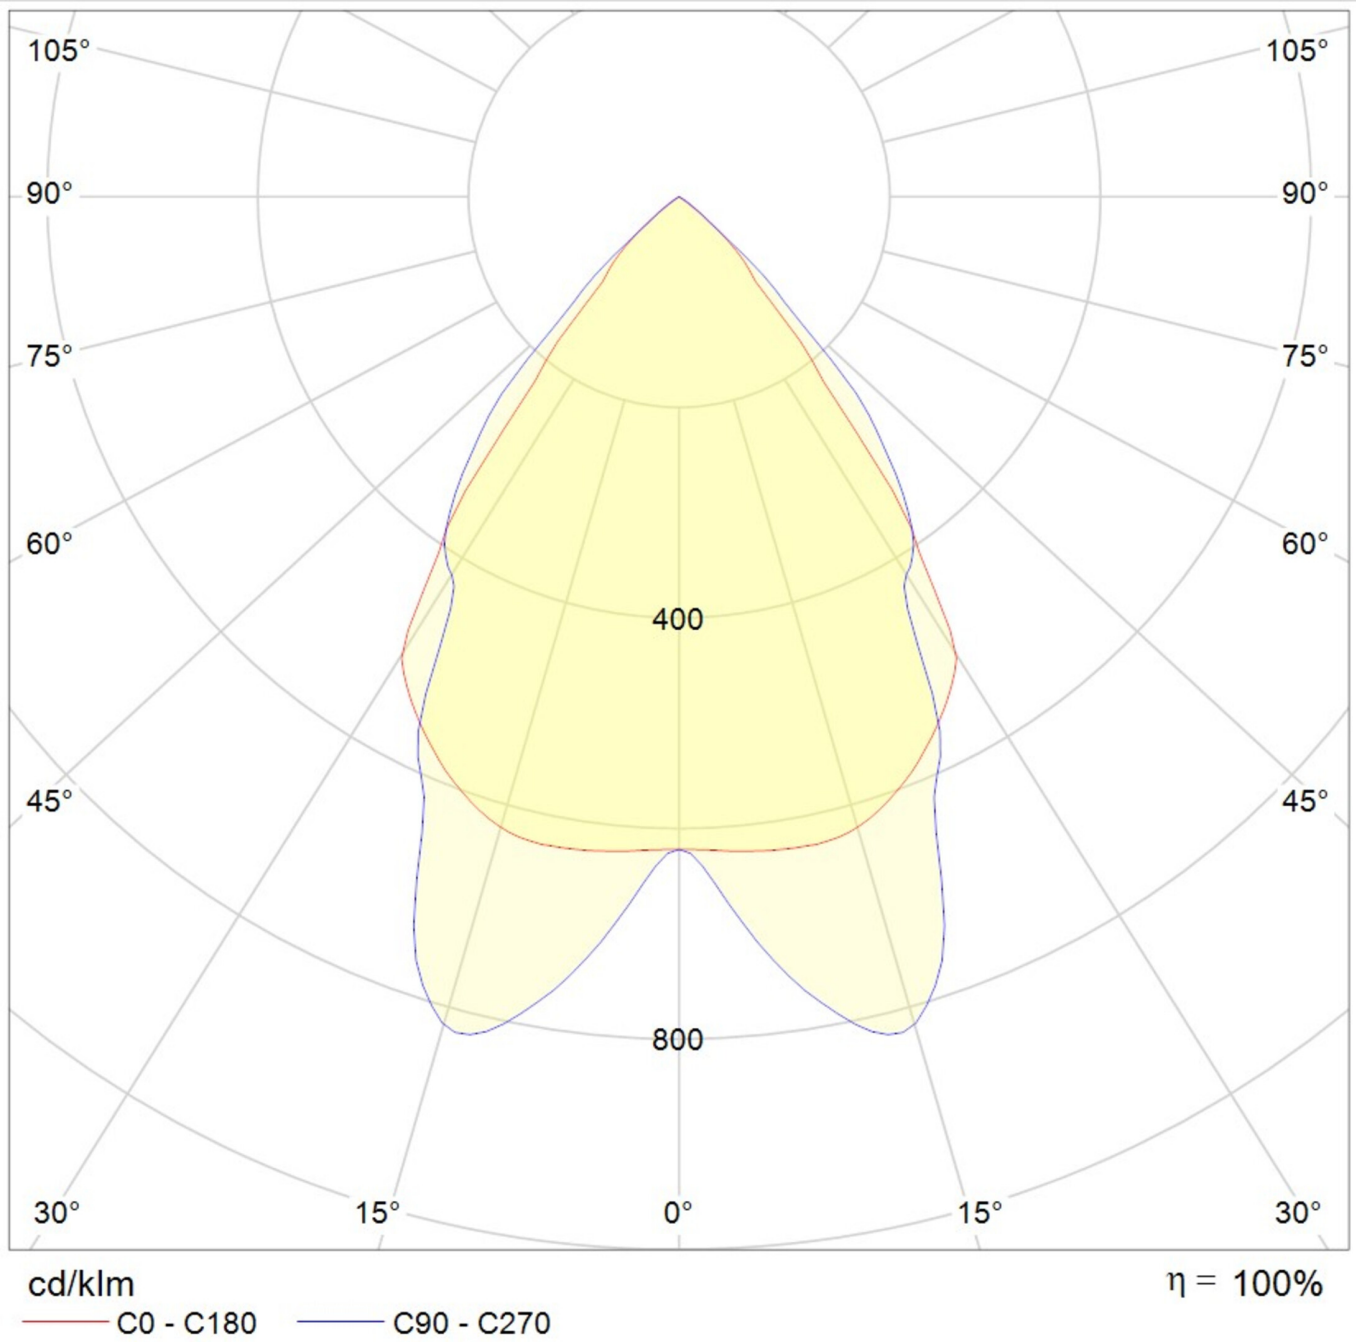

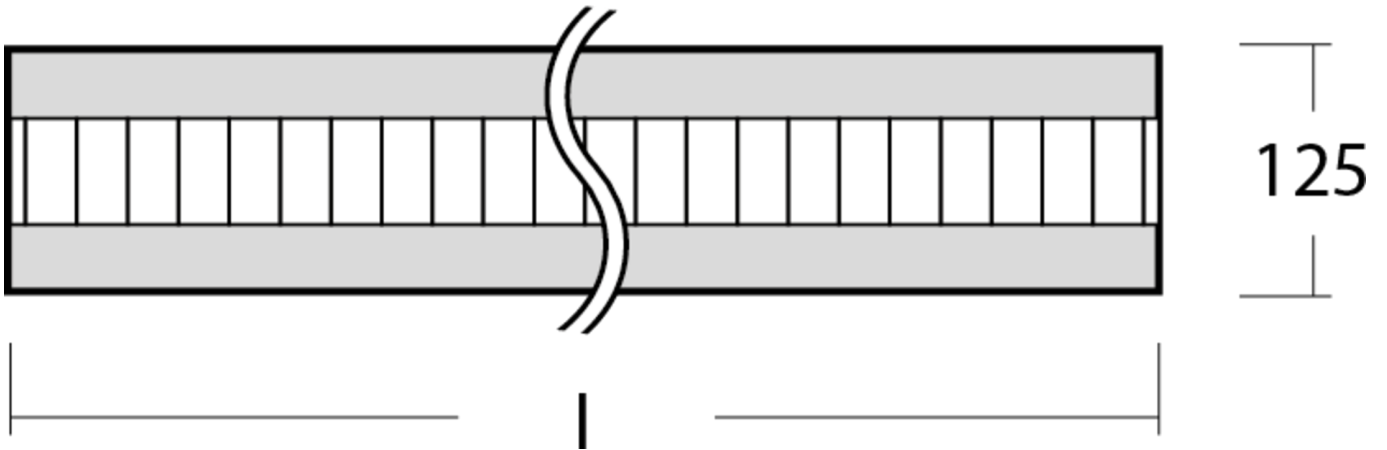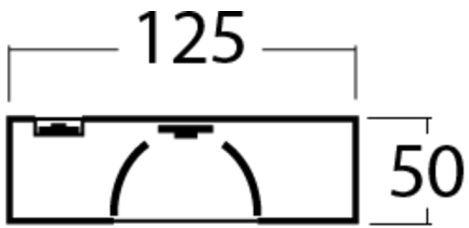

stand: 21.06.2024 - Det tas forbehold om tekniske endringer og feil.