




Art.-Nr: YWDZO-PAWD-4001-DU
LED pendant luminaire "ZOLA", c- surface mounting direct
distribution, 1415x50x125mm, 40W, 4400lm, 3000K, CRI >80,
IP20, UGR <19, Dali dimmable

LED ceiling luminaire, ZOLA series, with direct and direct/indirect beam. Housing made from aluminium, white, powder-coated. Parabolic louver diffuser, matt. Operating unit can be switched or dimmed (DALI dimmer), integrated. UGR < 16 and screen-compliant in accordance with EN 12464-1. Version with CASAMBI Bluetooth control available. DC compatible.

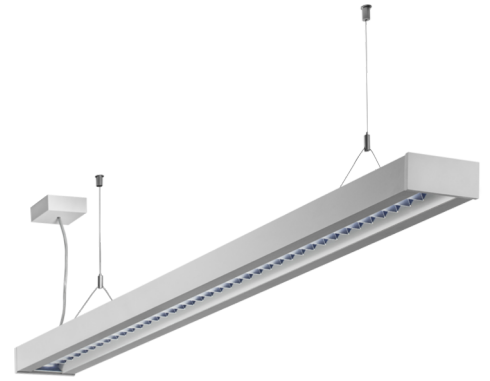

Mer informasjon



TEKNISKE DATA


Dimensjoner	
Produktdimensjoner lengde	1415 mm
Produktdimensjoner bredde	50 mm
Produktmål høyde	125 mm
Produktvekt	3.7 kg
Emballasjedimensjoner	
Emballasjedimensjoner lengde	1550 mm
Emballasjemål bredde	130 mm
Emballasjemål høyde	60 mm
Vekt inkludert emballasje	3.9 kg
Farge	
Farge	Hvit
Koffertmateriale	
Koffertmateriale	aluminium
Sertifisering	
Sertifisering	CE
beskyttelses klasse	1
IP-beskyttelse)	IP20
Glødetrådtest	650°C
Elektrisk forbindelse	



Tilkoblingstverrsnitt	1.5 mm ²
Dimming type	DALI
Systemytelse	40 W
Inngangsspenning AC	220-240V / 50-60Hz V
Startstrøm	28 A
Maktfaktor	0.98 PF
Strømforsyning	
Antall strømforsyninger på LS B10A	14 Stk.
Antall strømforsyninger på LS B16A	23 Stk.
Antall strømforsyninger på LS C10A	23 Stk.
Antall strømforsyninger på LS C16A	38 Stk.
DC-egnethet	Ja
Elektrisk versjon	med intern driftsenhet, Dimbar
Lystekniske data	
lyskilde	LED
Nominell lysstrøm	4400 lm
Fargegjengivelsesindeks	> 80 Ra
Fargetoleranse	2
Strålevinkel	72,8/64,8 °
fargetemperatur	3000 K
lys farge	830
UGR	15.3
levetid	50000 h, L80
lyseffekt	110 lm/w
temperaturer	
Omgivelsestemperatur (min)	0 °C
Omgivelsestemperatur (maks.)	+25 °C
Monteringstype	
Monteringstype	Pendel





TEXT.LICHTVERTEILUNG

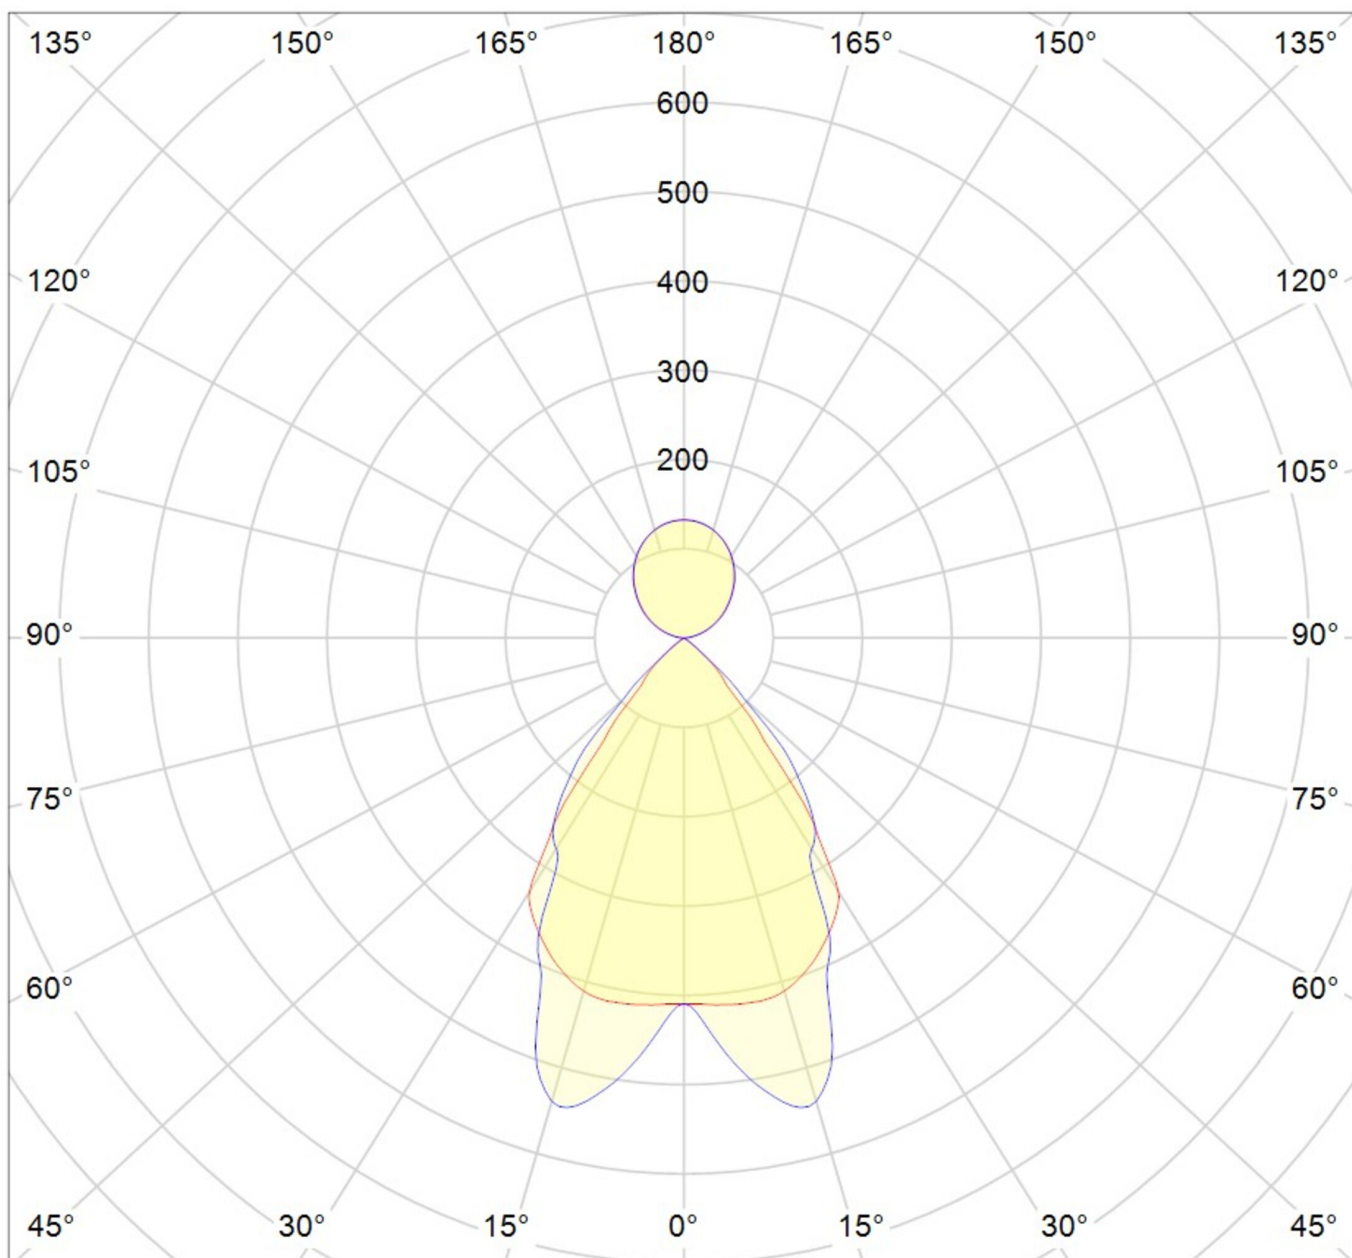

cd/klm

$\eta = 100\%$

— C0 - C180 — C90 - C270

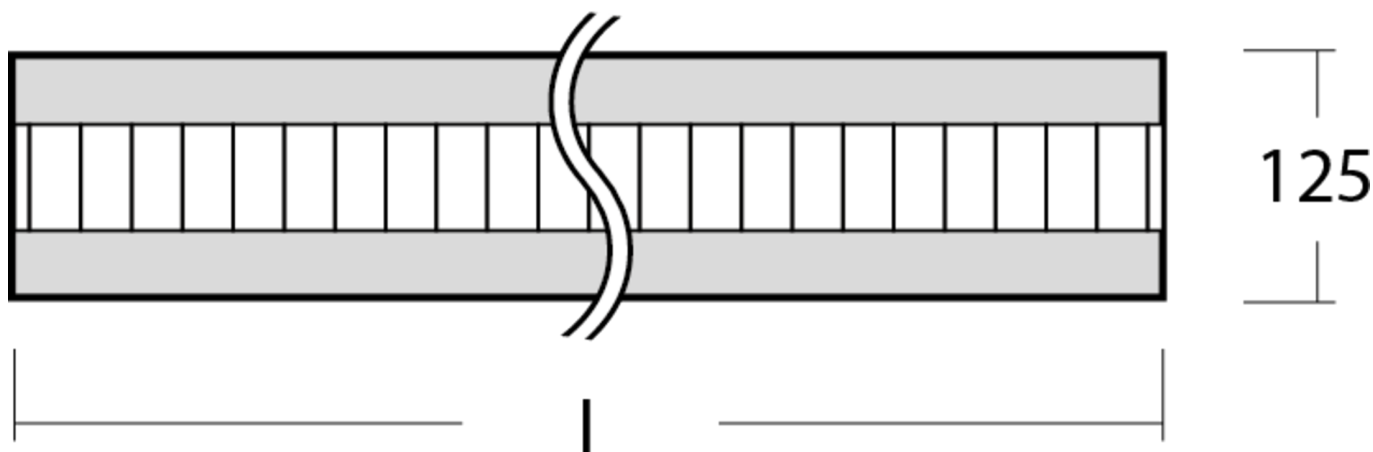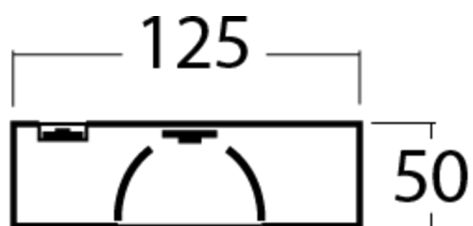

stand: 21.06.2024 - Det tas forbehold om tekniske endringer og feil.