




Art.-No.: YMOCA-ROLLO-LR Casa Rollo 2in1 roller shutter control + 2-

The CASA ROLLO roller shutter control allows you to conveniently operate roller shutters, blinds, or awnings via buttons or the handy app. With the additional "Long Range" feature, you can now enjoy reliable control even from greater distances.

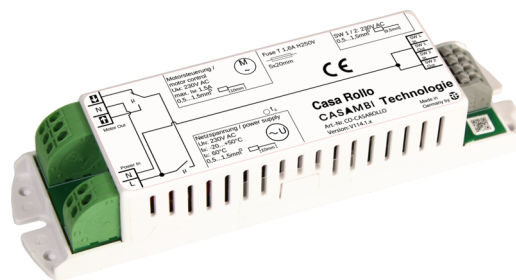

DANE TECHNICZNE

Electrical data	
Input Voltage AC	AC 220-240V / 50-60Hz
Consumption standby	0,15 W
Output max.	345 VA
Connection cross section	1,5 mm ²
Switch cycles	50 000
Load types	Inductive load
Communication type	Wireless, Casambi
Connection type	Pushbutton
Switching output	345 VA
CASAMBI Inside	Yes
Acceptance tests	
Certifications	CE
Ingress protection (IP) rating	IP 20
Ambient temperature	-20 to +50 C°
Storage temperature	-25 to +75 C°
Housing temperatur max., tc	60 C°
Physical data	
Mounting method	recessed ceiling mounted
Housing material	Tworzywo sztuczne
Housing colour	white
Length (L)	143 mm
Width (B)	38 mm
Height (H)	26 mm
Product weight	0,07 kg