



Art.-Nr: AGR403WL-AZ
Exit sign Single Battery
Recessed wall mounting, Wireless Professional, 3 h, 50m,
IP40, Zinc die-cast, Anthracite

The AGR is a zinc-diecast exit sign for recessed wall mounting and for the marking of escape routes. It is part of a complete luminaire series, which features solutions for every mounting situation and was honored with the German Design Award. Luminaires of the A-Series are equipped with modern LED illuminants and offer flexibility with changeable pictograms.

LED exit sign according to EN 60598-1, EN 60598-2-22, EN 7010 and EN 1838



More information



TECHNICAL DATA


Luminaire type	Exit sign
Mounting	Recessed wall mounting
Recognition distance	50m
Pictograph	acc. to Specification
Illuminant	LED
Housing material	Zinc die-cast
Housing color	Anthracite
Protection type (IP)	IP40
Impact resistance (IK)	≥ 3
Certification	WEEE, CE
Insulation class	2
Supply	Single Battery
Monitoring	Wireless Professional
Bridging time	3 h
Battery	LFP3212.K-SET-2AKKU
Operating mode	Standby circuit / permanent circuit
Input voltageAC	230 V
Input frequency	50 Hz
Power max.	7 W
Power DS	5,6 W



Power BS	0,8 W
Ambient temperature DS	-5 °C - 40 °C
Ambient temperature BS	-5 °C - 40 °C
Depth	73 mm
Width	517 mm
Height	296 mm
Installation length	176 mm
Installation width	68 mm
Installation height	40 mm
Weight	2.67
Weight incl. packaging	3.32
Connection cross-section	2.5 mm ²
Switching input	Yes
Emergency light blocking	Yes
Battery connection	Connector
Dimming function	Yes
Customs tariff number	94056180
EAN	4260682154491



TECHNICAL DRAWING

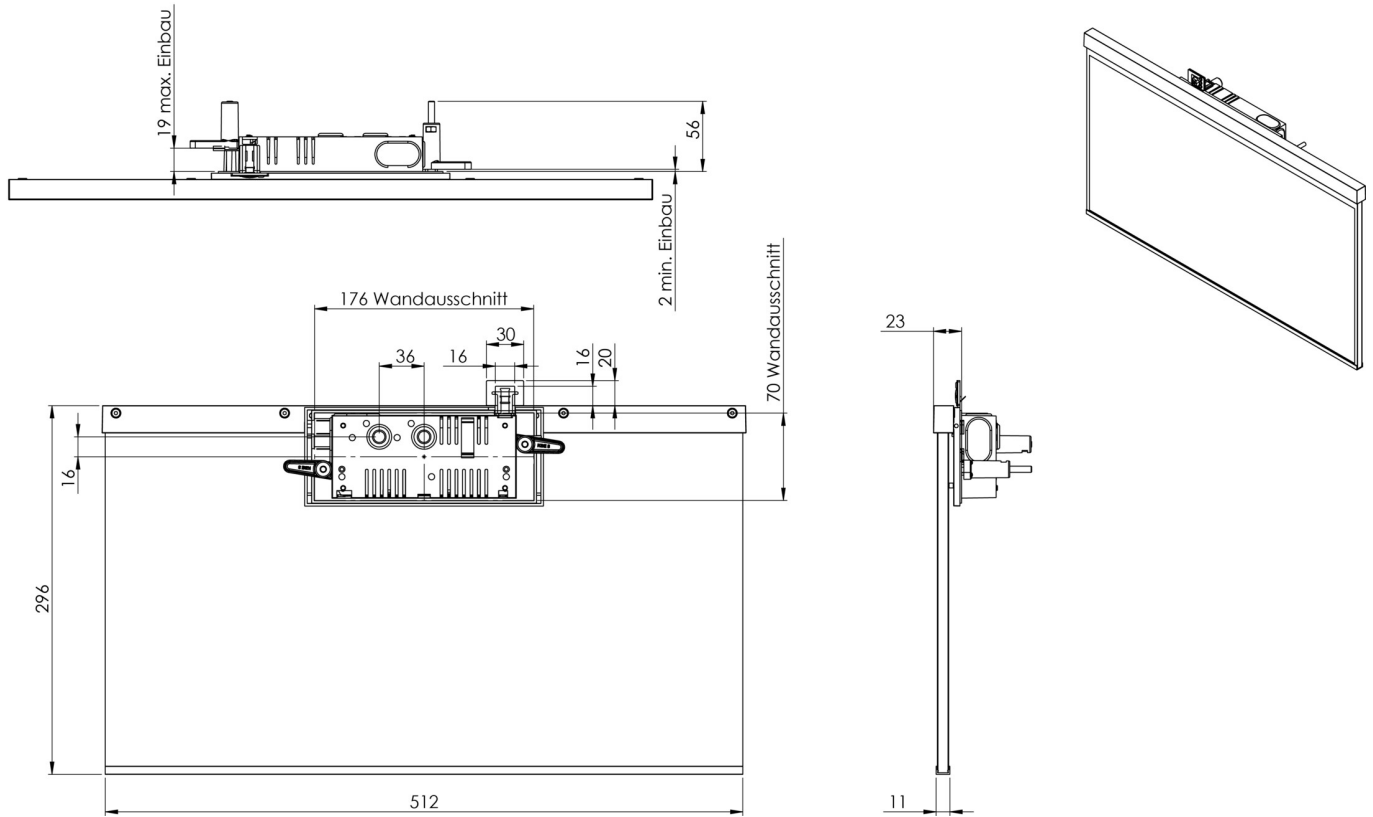

As of: 17.07.2024 - Subject to technical changes and errors.