



Art.-Nr: AMEP008SC Exit sign Single Battery Pendant recessed ceiling, SelfControl (SC), 8 h, 22 m, IP20, Zinc die-cast, white

Modern zinc die-cast emergency exit sign luminaire with pendant for recessed mounting in the ceiling. With an installation diameter of 68 mm, this luminaire can be easily integrated into many environments. Escape and emergency routes can be identified on either one or two sides.

It is part of the A series luminaire family, which provides solutions for any mounting and has won the German Design Award for its uniform, straight-line design.

Automatic monitoring of safety luminaire with SelfControl. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.





More information www.rp-group.com/en/item/AMEP008SC



TECHNICAL DATA

Luminaire type	Exit sign
Mounting	Pendant recessed ceiling
Recognition distance	22 m
Pictograph	Set
Illuminant	LED
Housing material	Zinc die-cast
Housing color	white
Protection type (IP)	IP20
Impact resistance (IK)	≥ 3
Certification	WEEE, CE
Insulation class	2
Supply	Single Battery
Monitoring	SelfControl (SC)
Bridging time	8 h
Battery	NIMH 4,8 V/
Operating mode	Standby circuit / permanent circuit






Input voltageAC	230 V				
Input frequency	50 / 60 Hz				
Power max.	4,6 W				
Power maintained	3,4 W				
Power non-maintained	0,35 W				
Ambient temperature maintained mode	-5 °C to 40 °C				
Ambient temperature non-maintained mode	-5 °C to 40 °C				
Depth	92 mm				
Width	236 mm				
Height	291 mm				
Installation dimensions Diameter	68 mm				
Weight	1.4				
Weight incl. packaging	1.76				
Connection cross-section	2.5 mm²				
Switching input	Yes				
Emergency light blocking	Yes				
Battery connection	Connector				
Dimming function	Yes				
Customs tariff number	94056180				
EAN	4260581714178				





TECHNICAL DRAWING

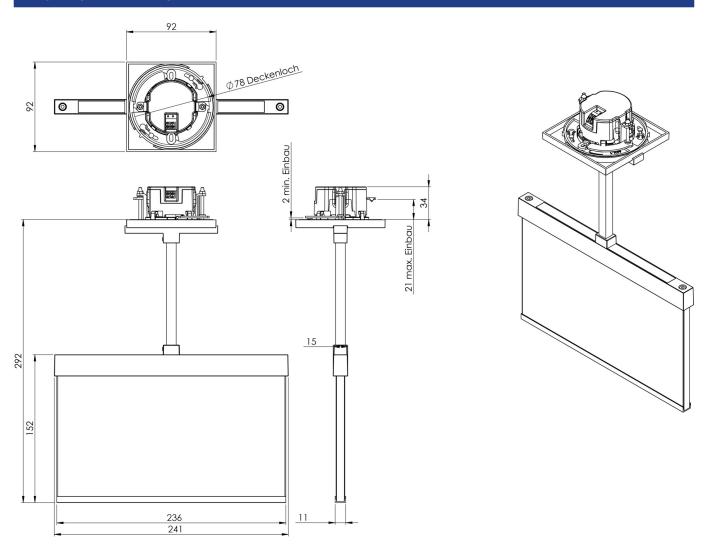

ACCESSORY LIST

AM-X-PKG -





RELATED PRODUCTS

ArtNo.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote main- tenance	max. luminai- res	Single luminai- re monitoring
AMEP008SC- AZ	₹ } →	SelfControl (SC)	Single battery	RAL 7016	€	no	high	no	unlimited	itself
AMEP008SC-E	F	SelfControl (SC)	Single battery	Edelstahl	€	no	high	no	unlimited	itself

As of: 05.03.2025 - Subject to technical changes and errors.