



Art.-Nr: KSC013WL-COOL
Exit sign, Safety luminaire Single Battery
Ceiling mounting, Wireless Professional (WL), 3 h, 22 m,
IP54, Plastic, white

Innovative high-grade LED exit sign and emergency luminaire for universal mounting. This luminaire using only 3 parts has a simple installation. Applicable for maintained or non-maintained operation mode. The toolless change and variable use of the pictograms provide planning security on site. Universal pictogram set (left, right, up, down) included.

The KSC luminaire is also designed for illumination of fire fighting and first aid facilities. The equipment of the first aid facilities is lighted by at least 5 lux according to EN 1838.

Signs according to EN 60598-1, EN 60598-2-22 and EN 1838 norms.

The COOL light is equipped with an external battery housing for installation in the building. The installation of the lamp can be done outdoors or in cold stores.

Wireless central control and monitoring for large installations of up to 50,000 luminaires with Wireless Professional. The innovative integrated lens holder with a rapid fitting fixture permits the flexible use of various lens types. Using the right lens allows the distribution of light to be matched perfectly to the application and simplifies illumination which satisfies all relevant standards. A round lens and hall lens are supplied with every luminaire, allowing it to be adapted perfectly to the respective mounting situation. Other lenses, such as a spotlight lens, beam lens or H lens, are available as options. Universal mounting includes fitting on the wall and ceiling as well as the option of fitting in the ceiling in conjunction with the mounting frame available.



More information

www.rp-group.com/en/item/KSC013WL-COOL



TECHNICAL DATA


Luminaire type	Exit sign, Safety luminaire
Mounting	Ceiling mounting
Recognition distance	22 m
Pictograph	Set
Illuminant	LED
Housing material	Plastic
Housing color	white
Protection type (IP)	IP54
Impact resistance (IK)	≥ 3



Certification	WEEE, CE, CNBOP, ENEC
Insulation class	2
Supply	Single Battery
Monitoring	Wireless Professional (WL)
Bridging time	3 h
Battery	3,2V V 3,3Ah Ah/
Operating mode	Standby circuit / permanent circuit
Input voltage AC	230 V
Input frequency	50 / 60 Hz
Input voltage DC	- V
Power max.	5,3 W
Power DS	3,9 W
Power BS	1,5 W
Ambient temperature DS	-25 °C - 40 °C
Ambient temperature BS	-25 °C - 40 °C
Depth	34 mm
Width	250 mm
Height	174 mm
Weight	0.7
Weight incl. packaging	0.78
Connection cross-section	2.5 mm ²
Switching input	Yes
Emergency light blocking	No
Battery connection	Connector
Dimming function	No
Luminous flux mains	190 lm
Luminous flux emergency	190 lm
Customs tariff number	94056120
EAN	4260659562038



TECHNICAL DRAWING

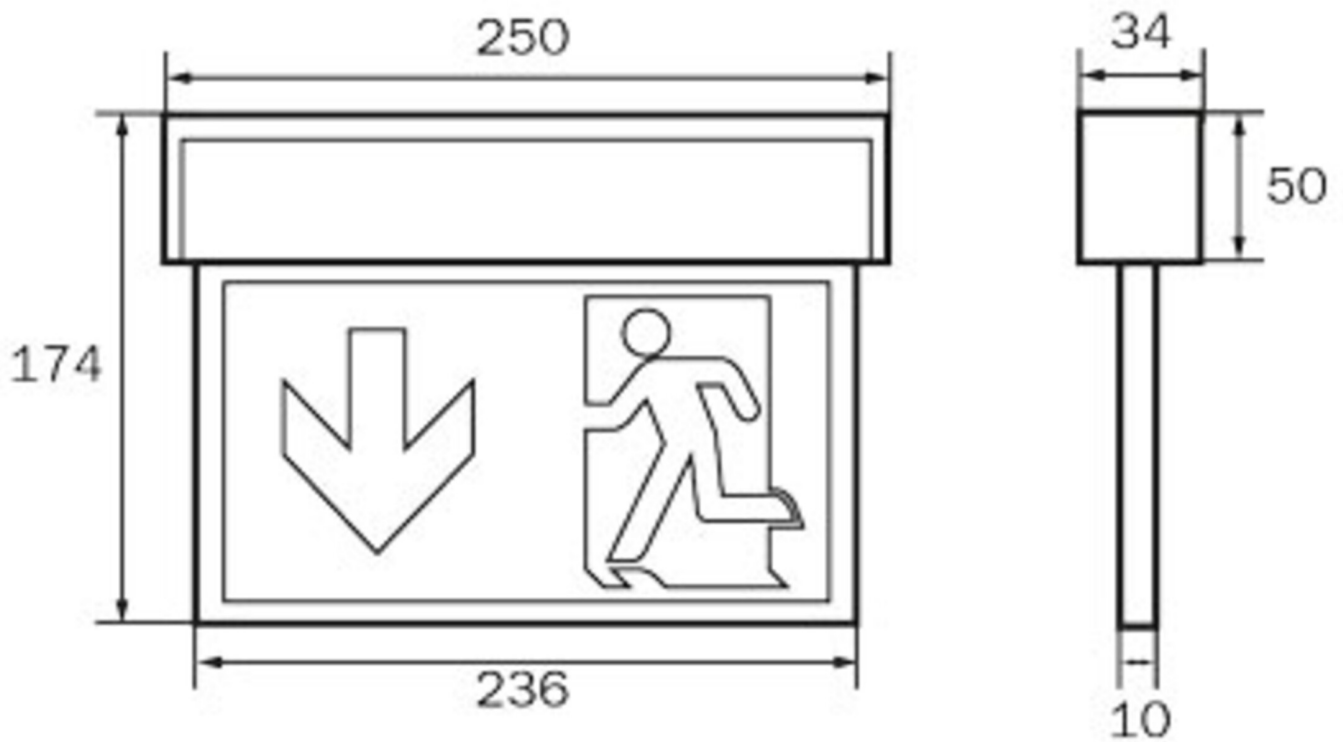

ACCESSORY LIST

- DSA - Wire suspension
- AWKSU - Wall bracket
- 2PW-EB - Pendant
- KMBE - Concrete-mounted box
- BALLPLX-KMU - Wire mesh surround
- KS4FIRE -
- KS4HELP -



RELATED PRODUCTS

Art.-No.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote maintenance	max. luminaires	Single luminaire monitoring
KSC013SC-SW		SelfControl (SC)	Single battery	RAL 9005	€	no	high	no	unlimited	itself
KSC013WB-SW		Wireless Basic (WB)	Single battery	RAL 9005	€€	yes	low	yes	50	central
KSC013WL-SW		Wireless Professional (WL)	Single battery	RAL 9005	€€	yes	low	yes	1,000 per system	central
KSC013SC		SelfControl (SC)	Single battery	RAL 9003	€	no	high	no	unlimited	itself
KSC013SC-G10		SelfControl (SC)	Single battery	RAL 9003	€	no	high	no	unlimited	itself
KSC013WB		Wireless Basic (WB)	Single battery	RAL 9003	€€	yes	low	yes	50	central
KSC013WL		Wireless Professional (WL)	Single battery	RAL 9003	€€	yes	low	yes	1,000 per system	central
KSC013WL-G10		Wireless Professional (WL)	Single battery	RAL 9003	€€	yes	low	yes	1,000 per system	central
KSC013WL-PL		Wireless Professional (WL)	Single battery	RAL 9003	€€	yes	low	yes	1,000 per system	central

As of: 23.08.2024 - Subject to technical changes and errors.