



Art.-Nr: PFW413SC
Safety luminaire
Wall, SelfControl, 3 h, 24 m, IP65, Plastic, white

Plastic luminaire for the marking and lighting of escape and rescue routes according to DIN EN 60598-1, DIN EN 60598-2-22 and EN 1838. For single or double sided labeling. Available for central power systems or as self-contained emergency luminaire.



More information




TECHNICAL DATA

Luminaire type	Safety luminaire
Mounting	Wall
Recognition distance	24 m
Pictograph	Set
Illuminant	LED
Housing material	Plastic
Housing color	white
Protection type (IP)	IP65
Impact resistance (IK)	5
Certification	WEEE, CE, D-Sign
Insulation class	1
Monitoring	SelfControl
Bridging time	3 h
Power max.	4,1 W
Power DS	3,3 W
Power BS	0,4 W
Ambient temperature DS	-5 °C - 40 °C
Ambient temperature BS	-5 °C - 40 °C
Depth	370 mm
Width	105 mm
Height	152 mm
Weight	0,97
Weight incl. packaging	1.1



Luminous flux mains	225 lm
Luminous flux emergency	225 lm
Customs tariff number	94056120
EAN	4260766553622

TECHNICAL DRAWING

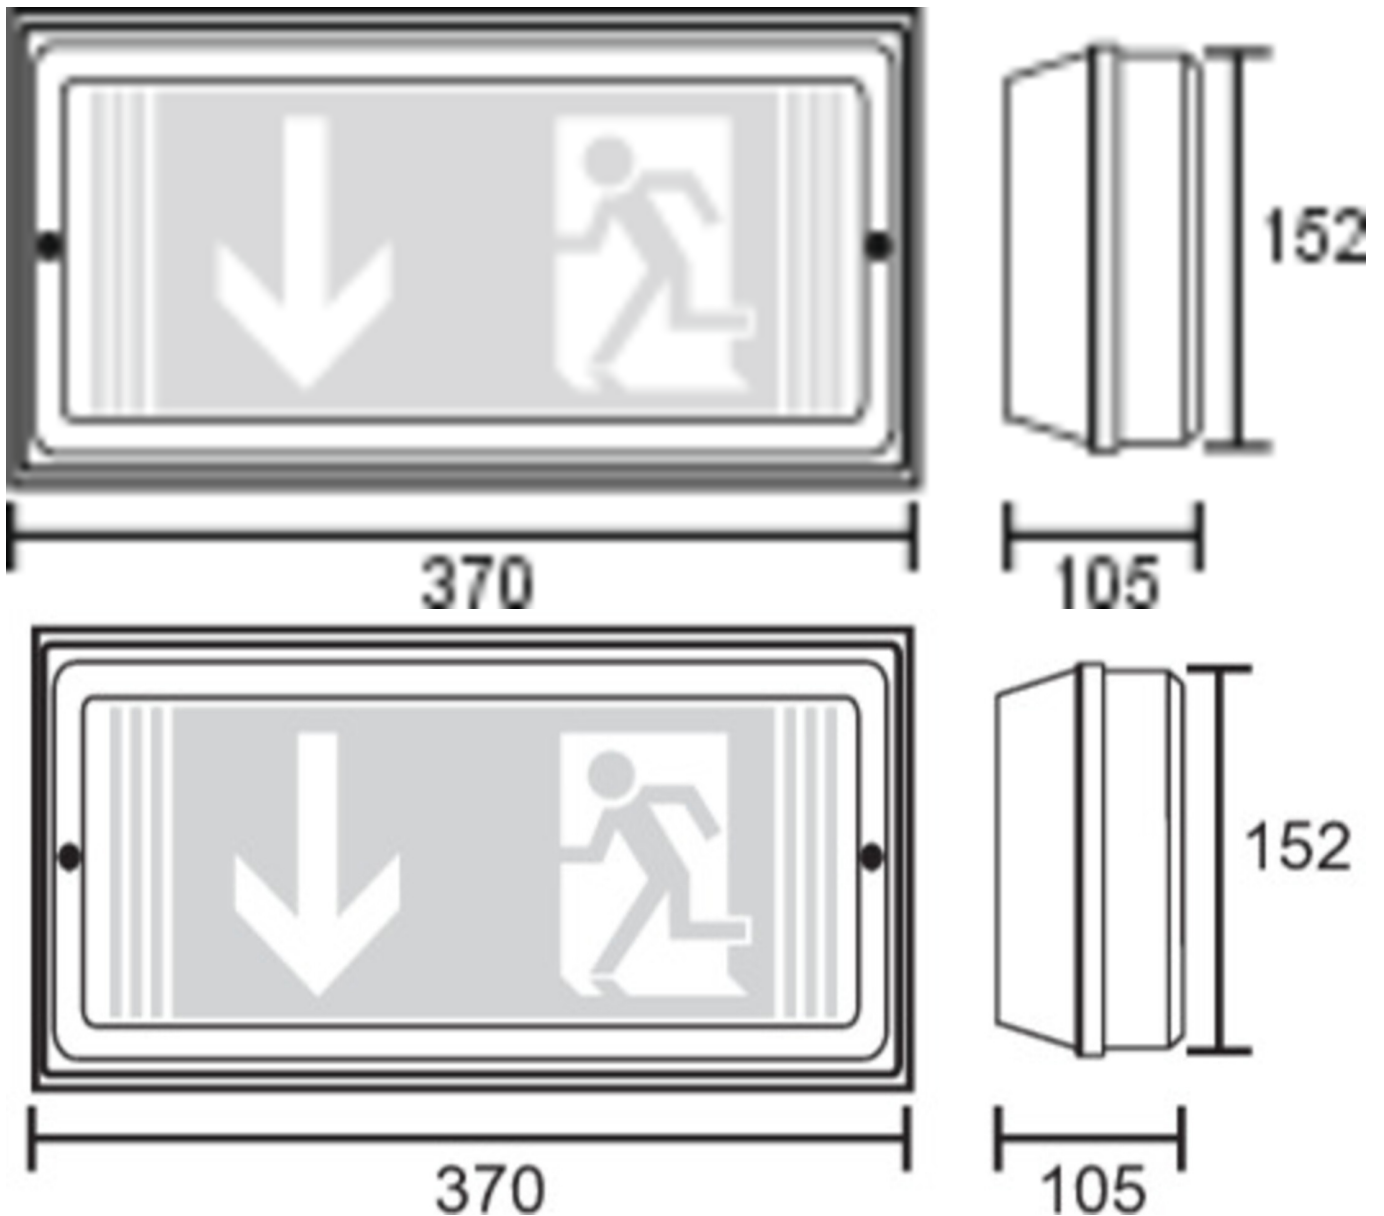



ACCESSORY LIST

BALL2 -

As of: 17.07.2024 - Subject to technical changes and errors.