



**Art.-Nr: PFW428SC**  
**Safety luminaire Supply**  
**Wall mounting, SelfControl (SC), 8 h, 24 m, IP65, Plastic,**  
**white**

Robust plastic emergency exit sign or safety luminaire.

Use as an emergency exit sign luminaire for wall mounting.

Or without the use of pictograms as a safety luminaire with the prismatic cover included, preferably for ceiling mounting.

Automatic monitoring of safety luminaire with SelfControl. The innovative integrated lens holder with a rapid fitting fixture permits the flexible use of various lens types. Using the right lens allows the distribution of light to be matched perfectly to the application and simplifies illumination which satisfies all relevant standards. A round lens and hall lens are supplied with every luminaire, allowing it to be adapted perfectly to the respective mounting situation. Other lenses, such as a spotlight lens, beam lens or H lens, are available as options. The luminaire is fitted with the innovative flexible plug-in system for rapid use of the right lens. The hall lens is supplied with every luminaire. A round lens, spotlight lens and beam lens are available as options.



More information  
[www.rp-group.com/en/item/PFW428SC](http://www.rp-group.com/en/item/PFW428SC)



## TECHNICAL DATA


Luminaire type	Safety luminaire
Mounting	Wall mounting
Recognition distance	24 m
Pictograph	Set
Illuminant	LED
Housing material	Plastic
Housing color	white
Protection type (IP)	IP65
Impact resistance (IK)	5
Certification	WEEE, CE, D-Sign
Insulation class	1
Monitoring	SelfControl (SC)
Bridging time	8 h
Battery	LiFePO4 6,4 V/3,3 Ah



Power max.	5,3 W
Power DS	3,9 W
Power BS	2 W
Ambient temperature DS	-5 °C - 40 °C
Ambient temperature BS	-5 °C - 40 °C
Depth	370 mm
Width	105 mm
Height	152 mm
Weight	1.13
Weight incl. packaging	1.26
Luminous flux mains	210 lm
Luminous flux emergency	210 lm
Customs tariff number	94056120
EAN	4262483023075



TECHNICAL DRAWING

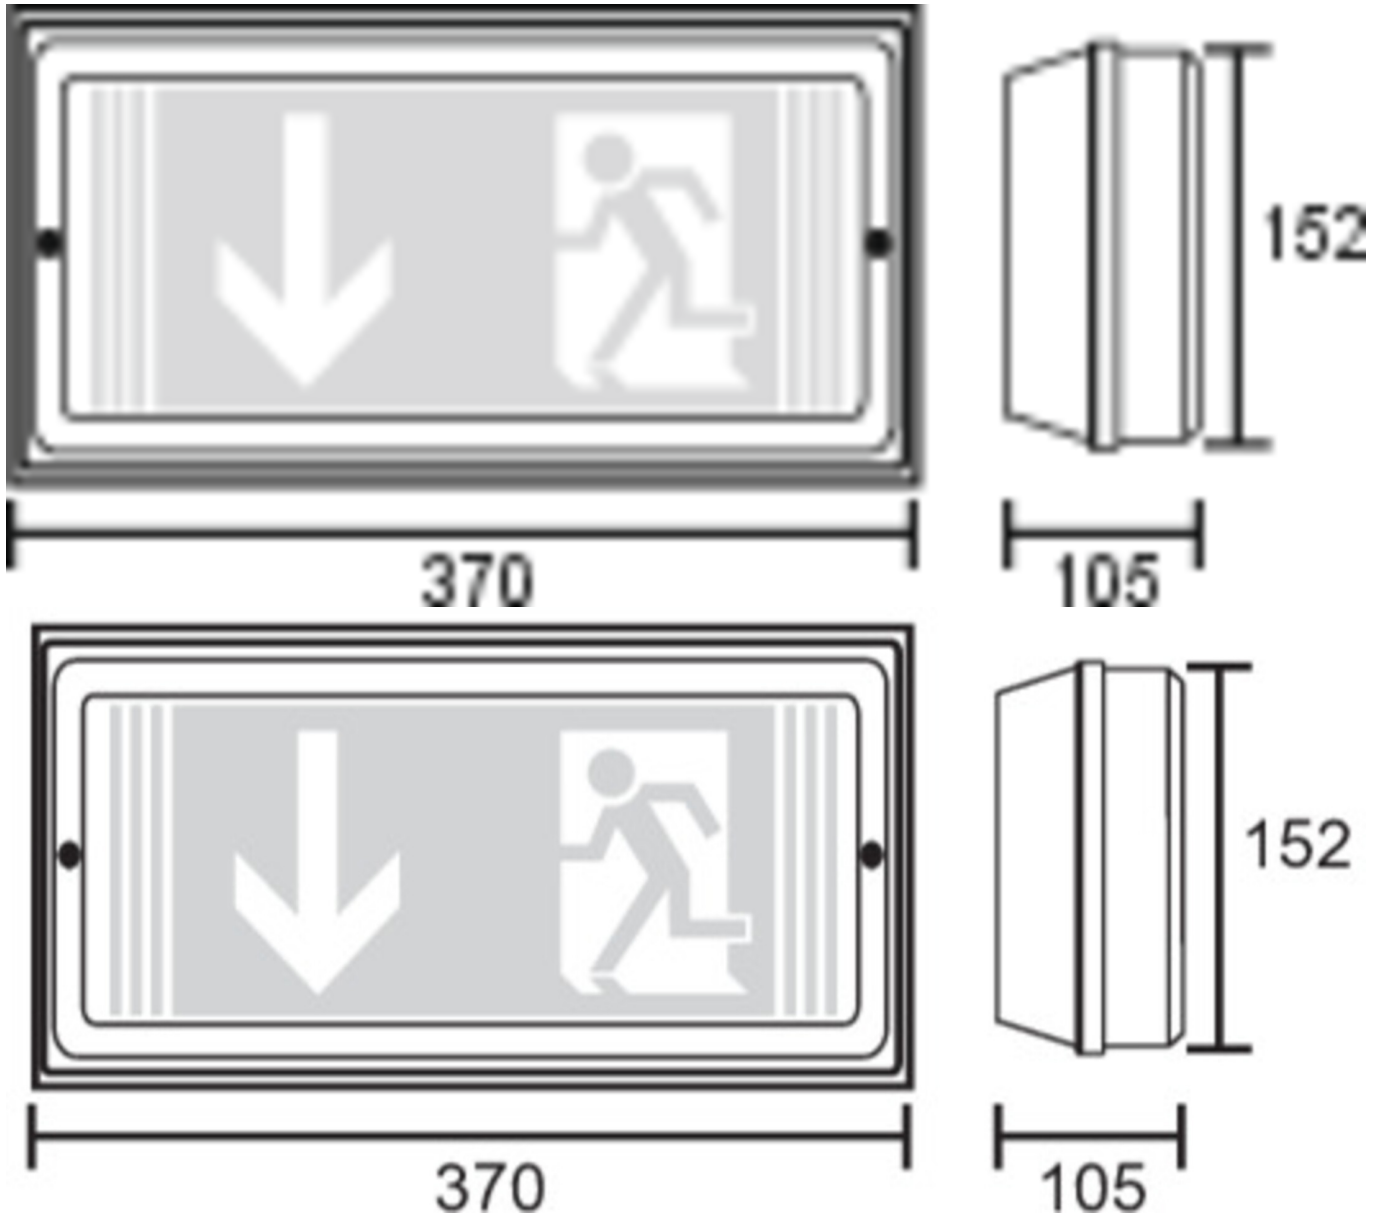

ACCESSORY LIST

BALL2 - Wire mesh guard

As of: 20.11.2024 - Subject to technical changes and errors.