




**Art.-Nr: YWDMA-LAWS-1701-D**  
**LED luminaire "MAVS", ceiling surface mounting, rectangular, 570x56x79mm, 17W, 1700lm, 3000K, CRI >80, IP40, white, switchable**

LED ceiling- and wall-mounted luminaire, MAVS. Housing made from aluminium, white, powder-coated. Diffuser made from plastic (PMMA), opal, UV-stabilised. Operating unit can be switched or dimmed (DALI dimmer), integrated. Version with CASAMBI® Bluetooth control available. DC compatible.

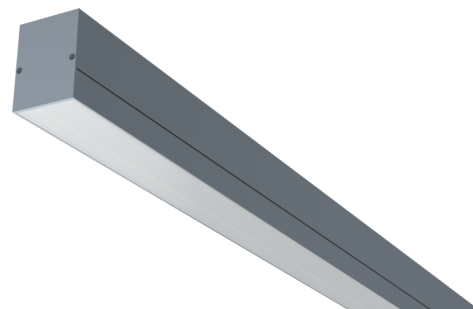

Mer informasjon

## TEKNISKE DATA



Dimensjoner	
Produktdimensjoner lengde	570 mm
Produktdimensjoner bredde	59 mm
Produktmål høyde	79 mm
Produktvekt	1.5 kg
Emballasjedimensjoner	
Emballasjedimensjoner lengde	690 mm
Emballasjemål bredde	118 mm
Emballasjemål høyde	75 mm
Vekt inkludert emballasje	1.8 kg
Farge	
Farge	Sølv
Koffertmateriale	
Koffertmateriale	aluminium
Sertifisering	
Sertifisering	CE
beskyttelses klasse	1
IP-beskyttelse)	IP40
Elektrisk forbindelse	
Tilkoblingstverrsnitt	2.5 mm <sup>2</sup>



Systemytelse	17 W
Inngangsspenning AC	220-240V / 50-60Hz V
Startstrøm	A
Maktfaktor	0.9 PF
Innkoblingstid	µs
<b>Strømforsyning</b>	
Antall strømforsyninger på LS C16A	Stk.
DC-egnethet	Ja
Elektrisk versjon	med intern driftsenhet, Byttbar
<b>Lystekniske data</b>	
lyskilde	LED
Nominell lysstrøm	1700 lm
Fargegjengivelsesindeks	> 80 Ra
Fargetoleranse	3
Strålevinkel	60 °
fargetemperatur	3000 K
lys farge	830
UGR	26.2
levetid	75000 h, L80
lyseffekt	100 lm/w
<b>temperaturer</b>	
Omgivelsestemperatur (min)	-20 °C
Omgivelsestemperatur (maks.)	+30 °C
<b>Monteringstype</b>	
Monteringstype	Takkonstruksjon



TEXT.LICHTVERTEILUNG

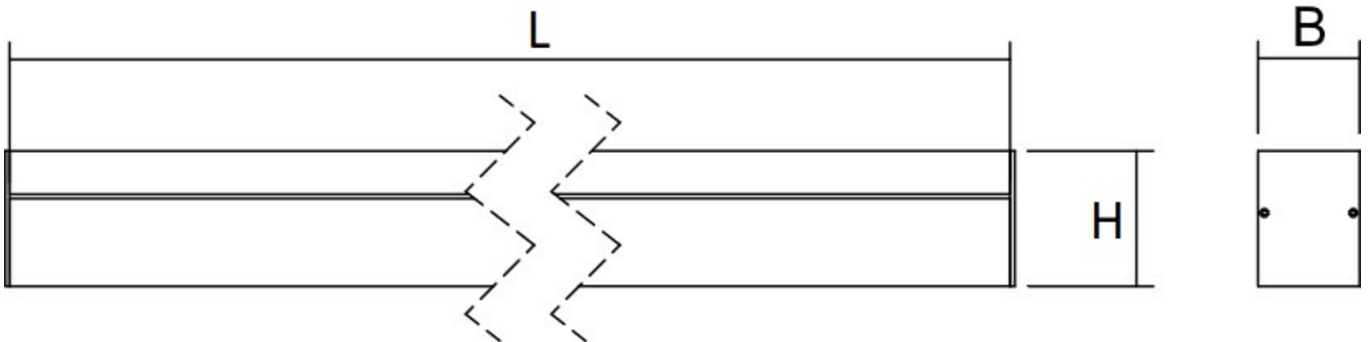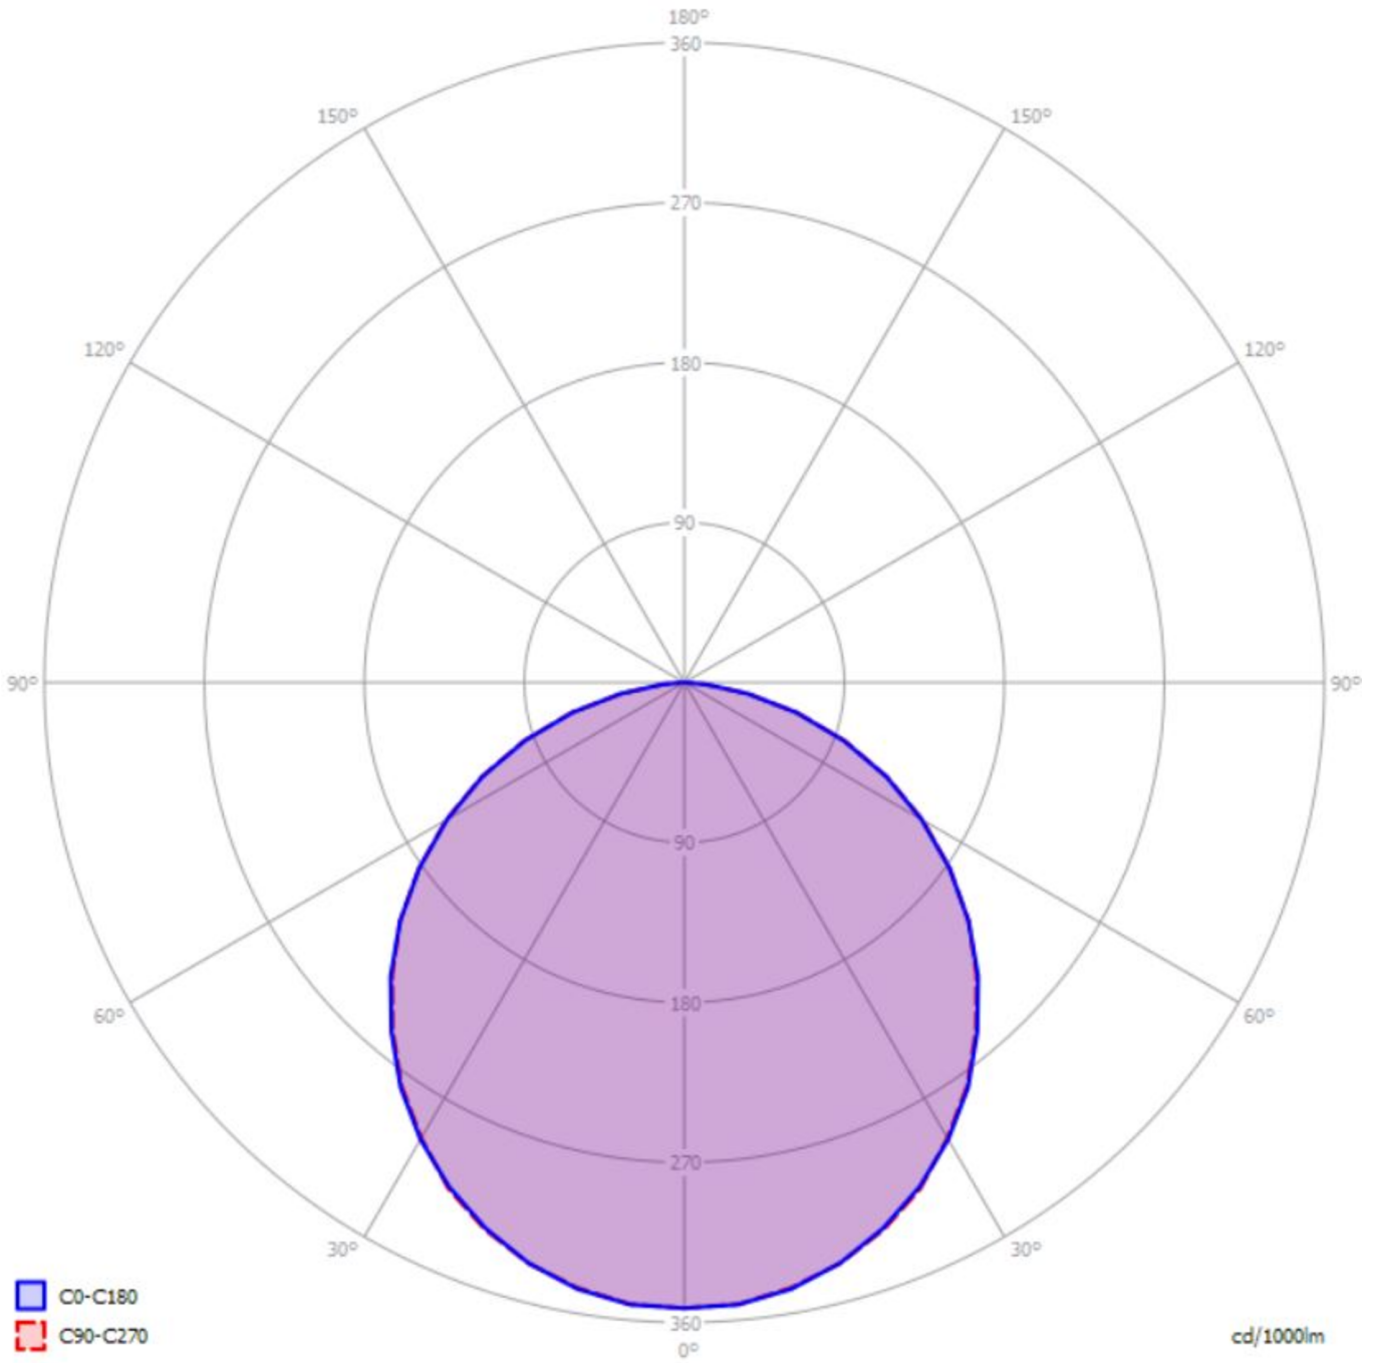



## TILBEHØRSLISTE

YWDMA-PENDEL - Pendant set for MAVS incl. transparent cable 3 x 1.5 mm<sup>2</sup>

YWDMA-MONKL-A - Mounting clamp for MAVS, surface mounting / 1 pc.

stand: 21.06.2024 - Det tas forbehold om tekniske endringer og feil.